

IEEE Standard Test Procedures for
ANTENNAS




73.455-21
I 59

IEEE
Std 149-1979
(Revision of
IEEE Std 149-1965)

IEEE Standard Test Procedures for Antennas

Sponsor
Antenna Standards Committee



Published by
The Institute of Electrical and Electronics Engineers, Inc



Distributed in cooperation with
Wiley-Interscience, a division of John Wiley & Sons, Inc

5506047

DS73/ae

ISBN 0-471-08032-2

Library of Congress Catalog Number 79-92425

© Copyright 1979 by

The Institute of Electrical and Electronics Engineers, Inc

*No part of this publication may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.*

December 19, 1979

SH07682

Foreword

(This Foreword is not a part of IEEE Std 149-1979, IEEE Standard Test Procedures for Antennas.)

This document is a major revision of IEEE Std 149-1965 which it supersedes. It represents the second revision of the standard since the original issuance in 1948 of 48IRE2S2, Standards on Antennas — Methods of Testing. Practically every topic contained in the previous standard has been expanded to reflect the great changes that have taken place, since 1965, in metrology and instrumentation technology as applied to antenna measurements.

This document contains sections on the design, evaluation, and operation of antenna ranges, electromagnetic radiation hazards, and environmental factors which did not appear in the preceding standard. The section on the determination of scattering cross-section, which appeared previously, has been omitted since it will appear as a separate standard at a later date.

Suggestions for the improvement of this standard will be welcome. They should be sent to:

Secretary
IEEE Standards Board
The Institute of Electrical and Electronics Engineers, Inc
345 East 47th Street
New York, NY 10017

This standard was prepared by the Subcommittee 2.11 on Methods of Testing Antennas of the IEEE Antenna Standards Committee. The Subcommittee preparing this revision had the following membership:

W. H. Kummer, *Chairman*

J. D. Dyson	A. C. Newell
E. S. Gillespie	A. F. Seaton
T. Mukaihata	G. P. Tricoles
A. T. Villeneuve	

Members of the IEEE Antenna Standards Committee who contributed to this standard document were:

E. S. Gillespie, *Chairman*

C. C. Allen	D. J. LeVine
K. G. Balmain	T. Mukaihata
P. L. Burgmyer	A. C. Newell
H. V. Cottony*	D. C. Ports
G. A. Deschamps	L. J. Ricardi
J. D. Dyson	A. C. Schell
E. S. Gillespie	A. F. Seaton
P. W. Hannan	C. J. Sletten*
H. Jasik	P. H. Smith
W. K. Kahn	W. T. Tilston
E. M. Kennaugh	G. P. Tricoles
W. H. Kummer	A. T. Villeneuve
M. S. Wheeler	

*Past chairmen

Contents

SECTION	PAGE
1. Scope	13
2. Standards References	14
3. Antenna-Range Measurements of Radiation Patterns	14
3.1 General	14
3.2 Pattern Cuts	16
3.3 Basic Antenna-Range Configurations	17
4. Antenna-Range Design	17
4.1 General	17
4.2 Antenna-Range Design Criteria	18
4.2.1 General	18
4.2.2 Effect of Mutual Coupling Between Source and Test Antennas	18
4.2.3 Effect of a Transverse Amplitude Taper over the Test Aperture	19
4.2.4 Effect of a Longitudinal Amplitude Taper at the Test Antenna	19
4.2.5 Effect of Phase Variation over the Test Aperture	20
4.3 Design of Elevated Ranges	20
4.3.1 Elevated Ranges over Flat Surfaces	20
4.3.2 Elevated Ranges over Irregular Surfaces	22
4.3.3 Estimation of Errors Due to Reflections	22
4.3.4 Use of Diffraction Fences and Longitudinal Ramps to Redirect Re- flected Energy	23
4.4 Design of Ground-Reflection Ranges	25
4.5 Other Ranges	28
4.5.1 Slant Range	28
4.5.2 Compact Range	29
4.5.3 Image-Plane Range	30
4.5.4 Anechoic Chambers	30
5. Antenna-Range Instrumentation	32
5.1 General	32
5.2 Source Antennas for Antenna Ranges	32
5.3 Transmitting Systems	32
5.4 Receiving Systems	34
5.5 Positioning Systems	37
5.5.1 Antenna Positioners	37
5.5.2 Antenna-Positioner Errors	39
5.6 Antenna-Pattern Recorder	41
5.7 Data-Processing and Control Computers	45

SECTION	PAGE
6. Antenna-Range Evaluation	47
6.1 General	47
6.2 Field-Probe Measurements over Test Aperture	47
6.3 Incident-Field Measurements Near the Range Axis on an Elevated Range	49
6.4 Incident-Field Measurements Near the Range Axis on a Ground-Reflection Range	51
6.5 Wide-Angle Incident-Field Measurements	52
6.5.1 General	52
6.5.2 Antenna-Pattern-Comparison Method	52
6.5.3 Longitudinal-Field-Probe Method	54
6.6 Evaluation of Anechoic Chambers	54
7. Special Measurement Techniques	56
7.1 Modeling Techniques	56
7.2 Antenna-Focusing Technique	58
7.3 Near-Field Probing with Mathematical Transformation	59
7.4 Swept-Frequency Technique	62
7.5 Indirect Measurements of Antenna Characteristics	63
8. Antenna-Range Operation	65
9. On-Site Measurements of Amplitude Patterns	67
10. Phase	69
10.1 General	69
10.2 Phase Patterns	70
10.3 Antenna Phase Center	70
10.4 Phase Measurements	71
10.4.1 General	71
10.4.2 Instrumentation	74
10.4.3 Sources of Error	75
11. Polarization	76
11.1 General	76
11.2 Polarization Measurements	85
11.2.1 General	85
11.2.2 Measurement of the Polarization Pattern	86
11.2.3 Rotating-Source Method	88
11.2.4 Multiple-Amplitude-Component Method	88
11.2.5 Phase-Amplitude Method	90
12. Measurement of Power Gain and Directivity	94
12.1 General	94
12.2 Gain Standards	95
12.2.1 Types of Gain Standards	95
12.2.2 Calibration of Gain Standards on a Free-Space Antenna Range	96
12.2.3 Calibration of Gain Standards on a Ground-Reflection Antenna Range ..	97
12.2.4 Calibration of Gain Standards on an Extrapolation Antenna Range	99

SECTION	PAGE
12.3 Gain-Transfer Measurements	100
12.3.1 Measurement of Linearly Polarized Antennas	100
12.3.2 Measurement of Circularly and Elliptically Polarized Antennas	100
12.3.3 Measurement in the High-Frequency Range (3–30 MHz)	101
12.4 Measurement of the Power Gain of Electrically Large Antennas	102
12.4.1 General	102
12.4.2 Use of Extraterrestrial Radio Sources for Power-Gain Measurements ...	103
12.4.3 Measurement of Absolute Antenna Noise Temperature and Figure of Merit G/T	106
12.4.4 Measurement of the Power Gain of Electrically Large Antennas Using the Gain-Transfer Method	106
12.5 Errors in Power-Gain Measurements	107
12.5.1 General	107
12.5.2 Sources of Error	107
12.5.3 Estimation of Uncertainty in Gain Measurements	110
12.6 Directivity Measurements	110
13. Determination of Radiation Efficiency	112
14. Special Measurements for Angle-Tracking Antennas	113
14.1 General	113
14.2 Conical Scanning Angle Tracking	114
14.3 Monopulse Angle Tracking	115
14.4 Electrical Boresight Measurements	115
15. Measurement of the Electrical Properties of Radomes	116
15.1 General	116
15.2 Significant Antenna-Radome Parameters	116
15.3 Apparatus	117
15.4 Testing of Wet Radomes	119
16. Measurement of Impedances	119
16.1 Input-Impedance Measurements	119
16.2 Mutual-Impedance Measurements	120
17. Ground-Wave Measurements	123
18. Power-Handling Measurements	125
19. Electromagnetic Radiation Hazards	127
19.1 General	127
19.2 Safe Radiation Limits	127
19.3 Measurement and Instrumentation	128
20. Environmental Factors	129
21. Bibliography	130

Fig 1	Coordinate System of Inter-Range Instrumentation Group	15
Fig 2	Standard Spherical Coordinate System Used in Antenna Measurements	16
Fig 3	Calculated Radiation Patterns Illustrating the Effect of Quadratic Phase Errors Encountered in Measuring Patterns at the Ranges Indicated	21
Fig 4	Elevated-Range Geometry	22
Fig 5	Possible Error in Measured Relative Pattern Level Due to Coherent Extraneous Signals	23
Fig 6	Example Configurations of a 686 Meter Elevated Range with Diffraction Fences . .	24
Fig 7	Example Configuration of a Diffraction Fence with Serrations	25
Fig 8	Ground-Reflection-Range Geometry	26
Fig 9	Possible Layout for a Ground-Reflection Range	28
Fig 10	Slant-Range Geometry	29
Fig 11	Schematic Representation of a Compact Range Using a Reflector and Feed	29
Fig 12	Specular Reflections from Sidewalls in Anechoic Chamber	31
Fig 13	Block Diagram of Typical Antenna-Measurement System	33
Fig 14	Basic Heterodyne Receiving System Using Double Conversion and Phase Locking	36
Fig 15	Dual-Channel Heterodyne Receiving System for Phase Measurements	37
Fig 16	The Two Orthogonal Axes of Rotation Required by an Antenna Positioner Using Spherical Coordinates	38
Fig 17	Positioner Configuration in which the Source Antenna is Supported by a Gantry that Provides the θ Rotation	38
Fig 18	Two Standard Positioner Configurations and their Associated Spherical Coordinate Systems	40
Fig 19	Model Tower and Its Associated Spherical Coordinate System	41
Fig 20	Polar and Rectangular Logarithmic Plots of a Normalized Radiation Pattern . . .	43
Fig 21	Power, Field, and Decibel Plots of the Same Antenna Pattern	44
Fig 22	Radiation Distribution Table Recorded by Scanning in ϕ and Stepping in θ	46
Fig 23	Typical Field-Probe Mechanism	48
Fig 24	Spatial Interference Pattern Due to a Reflected Wave	49
Fig 25	Amplitude of Spatial Interference Pattern Versus Ratio of Reflected-Signal to Direct-Signal Strengths for an Aperture-Probe Cut in the Plane of E_R and E_D	50
Fig 26	Illustration of How the Side-Lobe Level of the Test Antenna is Affected During Antenna-Pattern-Comparison Measurement	53
Fig 27	Azimuthal Pattern Comparisons for Incremental Longitudinal Displacements of the Center of Rotation	54
Fig 28	Amplitude Pattern of a Broad-Band Antenna Taken as a Function of Frequency with Angular Coordinate Taken in 5° Steps	55
Fig 29	Geometry for Free-Space VSWR Method	57
Fig 30	Geometry for Geometric Optics Approach to Focusing	59
Fig 31	Block Diagram of Automatic Position and Measurement System	61
Fig 32	Amplitude Pattern of a Broad-Band Antenna Taken as a Function of Frequency with Angular Coordinate Taken in 5° Steps	63
Fig 33	Schematic Illustration of Analytical Photogrammetric Triangulation	64
Fig 34	Geometry Used to Relate the Coordinates of a Point on the Surface of a Reflector to the Measured Curvature	65

FIGURES		PAGE
Fig 35	System for On-Site Measurements of Amplitude Patterns	68
Fig 36	Phase Shift of Single-Frequency Field Propagating in the x Direction.....	70
Fig 37	Arrangements for Measuring Phase Patterns	72
Fig 38	Phase Measurement Between Two Ports of a Multiport Antenna.....	73
Fig 39	Geometry and Phase Change as a Displaced Source is Rotated about a Given Origin	74
Fig 40	Illustration of the Sense of Rotation.....	77
Fig 41	Polarization Ellipse in Relation to Antenna Coordinate System	77
Fig 42	Relation Between Polarization Properties of an Antenna when Transmitting and Receiving	78
Fig 43	Illustration of the Division of Power Between Two Orthogonal Elliptical Polarizations A and B	80
Fig 44	The Polarization Ellipses of Cross-Polarized Field Vectors	80
Fig 45	Poincaré Sphere Representation of the Polarization of a Plane Wave W	81
Fig 46	Representation of Polarization on the Poincaré Sphere	82
Fig 47	Definition of Phase Reference for Orthogonal Circular Components	82
Fig 48	Polarizations of Incident Wave W and Receiving Antenna A_r , Plotted on the Poincaré Sphere	83
Fig 49	Polarization Box and Its Relation to the Poincaré Sphere	84
Fig 50	Polarization Pattern of a Wave.....	86
Fig 51	Poincaré Sphere Representation of the Polarization-Pattern Method.....	87
Fig 52	Generation of the Polarization Pattern Using the Polarization Matrix Result	87
Fig 53	Continuously Scanned Polarization Pattern as a Function of Angle θ	88
Fig 54	Multiple-Amplitude-Component Method of Polarization Measurement.....	89
Fig 55	Instrumentation of the Phase-Amplitude Method of Polarization Measurement ..	90
Fig 56	Phase-Amplitude Measurements with Circularly Polarized Antennas.....	91
Fig 57	Phase-Amplitude Measurements with Linearly Polarized Sampling Antennas	92
Fig 58	Three-Antenna Absolute Method of Polarization Measurement.....	93
Fig 59	Two-Antenna System Illustrating the Friis Transmission Formula	96
Fig 60	Typical Instrumentation for Two-Antenna and Three-Antenna Methods of Power-Gain Measurement	97
Fig 61	Typical Instrumentation for Swept-Frequency Two-Antenna and Three-Antenna Methods of Power-Gain Measurement	98
Fig 62	Ground-Reflection-Range Geometry.....	98
Fig 63	Flux-Density Spectra of Several Radio Stars	102
Fig 64	Typical Instrumentation for the Measurement of Antenna Power Gain and Temperature Using a Radio-Star Method	105
Fig 65	Signals Received by Tracking Antenna Versus Angle of Target	114
Fig 66	Orthogonal Arrays for Beam-Shift Measurement.....	118
Fig 67	Decay of Surface-Wave Component of the Ground Wave for a Plane Earth.....	124

TABLES

Table 1	Information about Several Radio Sources [92].....	103
Table 2	Errors in the Measured Gain of a Purely Circularly Polarized Antenna Due to a Finite Axial Ratio of the Transmitting Antenna	109
Table 3	Errors in the Measured Gain of a Linearly Polarized Antenna Due to a Finite Axial Ratio of the Transmitting Antenna	109
Table 4	Electromagnetic Radiation Safety Limits	128

APPENDIXES	PAGE
Appendix A: Field Regions	139
A1. General	139
A2. Bibliography	141
Appendix B: Reciprocity	141
B1. General	141
B2. Antenna Patterns	141
B3. Gain and Effective Area	142
B4. Expanded Reciprocity Relations	142
B5. Bibliography	143
APPENDIX FIGURE	
Fig A1 Field Regions for Two Antenna Types	140

IEEE Standard

Test Procedures for Antennas

1. Scope

This document comprises test procedures for the measurement of antenna properties. It is a comprehensive revision and extension of the previous test procedure ANSI/IEEE Std 149-1965 (Reaff 1971).

Throughout this standard it is assumed that the antenna to be measured can be treated as a passive, linear, and reciprocal device. Therefore its radiation properties can be measured in either the transmitting or the receiving mode. Many of the test procedures described can, however, be adapted for use in the measurement of antenna systems containing circuit elements that may be active, nonlinear, or nonreciprocal. For these cases there is no simple relationship between the antenna system's transmitting and receiving properties. Therefore measurements shall be performed for the mode or modes in which the antenna system has been designed to be used.

A fundamental property of any antenna is its radiation pattern. The measurement of radiation patterns on an antenna range is discussed in Section 3, with the emphasis placed on amplitude patterns. The design of antenna ranges, or antenna test facilities, is described in Section 4.

The instrumentation required for the antenna range, directions for the evaluation of an (existing) range, and the operation of ranges are discussed in Sections 5, 6, and 8, respectively. A variety of special measurement techniques are included in Section 7.

The working environment in which an antenna is installed may substantially modify the intrinsic pattern of an antenna. Consequently measurements *in situ* are frequently required. These are discussed in Section 9.

For each direction of space, the radiation pattern is characterized by amplitude, phase, and polarization. The latter characteristics are taken up in Sections 10 and 11, respectively.

The relative amplitude-pattern information may be converted into absolute intensities through information derived from the measurement of antenna gain. The determination of gain and closely related directivity is described in Section 12. Errors in conventional gain calibration measurements are discussed particularly in 12.5. Losses in the antenna itself can be of importance in some types of antennas. These losses can be accounted for by the radiation efficiency. Procedures for their determination are treated in Section 13.

Section 14 deals with boresight measurements, which are concerned with the precise determination of the direction of the beam or tracking axis of an antenna system. The sensitive components of the antenna frequently require protection from harsh influences of the environment. The electrically transmissive shield or radome which provides this protection shall frequently be evaluated so that its effect on the radiation pattern is understood. This topic is treated in Section 15.

Power transfer from generator to antenna is controlled by the input impedance to the

antenna. This important parameter frequently limits the useful bandwidth of the antenna. Measurement procedures and network descriptions appropriate from low to microwave frequencies are presented in Section 16.

An important class of antennas relies on ground to enhance the received signal. In this case the ground shall be considered as an integral part of the antenna. The modification of antenna concepts and additional data on the ground-wave propagation are presented in Section 17.

The antenna and its associated circuits rather than the capacity of the transmitter generator may limit the amount of power, either average power or peak power, that can be effectively radiated. It is desirable therefore to determine these limitations as well as the environmental factors that may modify them independently of the system context. Procedures for testing power-handling capacity are outlined in Section 18.

Another concern to the antenna engineer is that of radiation hazards. It is well known that radio-frequency (rf) fields of sufficient intensity can cause damage to biological tissue. Therefore it is usually necessary to determine the level of the radiation intensity in the vicinity of antennas radiating high radio-frequency power so that appropriate safety precautions can be taken before personnel enter the area. This important aspect of antenna measurements is discussed in Section 19.

Mechanical or structural properties along with environmental factors are described in Section 20. Because these properties are so varied and specialized in nature, no attempt has been made to include descriptions of actual measurements in this test procedure. The environmental impact of an antenna is also an important consideration for the antenna engineer. One aspect of environmental impact is that of aesthetics. Large antenna structures are necessarily conspicuous, and their appearance is of concern to those who live in their vicinity. This is particularly true in an urban setting. Since the aesthetic quality of the antenna structure is highly subjective, it is beyond the scope of this document to suggest any evaluation procedure.

Throughout this test procedure an attempt has been made to discuss measurement techniques as thoroughly as is practicable. However, in general step-by-step procedural descriptions have been avoided. References are provided which are illustrative of measurement techniques and in which details may be found. Because measurement techniques undergo continuing refinement, the reader should be alert to references on the subject of antenna measurement that will have appeared after this test procedure was prepared.

Many commonly used terms used in this test procedure are defined in ANSI/IEEE Std 145-1973, Definitions of Terms for Antennas. Commonly used terms that do not appear in that standard are italicized in this test procedure.

2. Standards References

When the following standard documents referenced in the text are superseded by an approved revision, the revision shall apply.

ANSI C95.1-1974, Safety Level of Electromagnetic Radiation with Respect to Personnel.

ANSI C95.3-1973, Techniques and Instrumentation for the Measurement of Potentially Hazardous Electromagnetic Radiation at Microwave Frequencies.

ANSI/IEEE Std 100-1977, Dictionary of Electrical and Electronics Terms.

ANSI/IEEE Std 145-1973, Definitions of Terms for Antennas.

ANSI/IEEE Std 148-1959 (Reaff 1971), Measurement of Waveguides and Components.

IEEE Std 211-1977, Standard Definitions of Terms for Radio Wave Propagation.

IEEE Std 291-1969, Standards Report on Measuring Field Strength in Radio Wave Propagation.

3. Antenna-Range Measurements of Radiation Patterns

3.1 General. Associated with the antenna under test is an operational coordinate system




Fig 1

The antenna's coordinate system is typically defined with respect to a mechanical reference on the antenna. A means of establishing the

To completely characterize the radiation field of an antenna, one shall measure its relative amplitude, relative phase, polarization, and the power gain on the surface of a sphere the center of which is located at the antenna under test. A representation of any of these radiation properties as a function of space coordinates is defined as a radiation pattern, or antenna pattern, of the test antenna. Since the distance R from the antenna under test to the measuring point is fixed, only the two angular coordinates are variables in a given radiation pattern. Usually the radio frequency of opera-

15

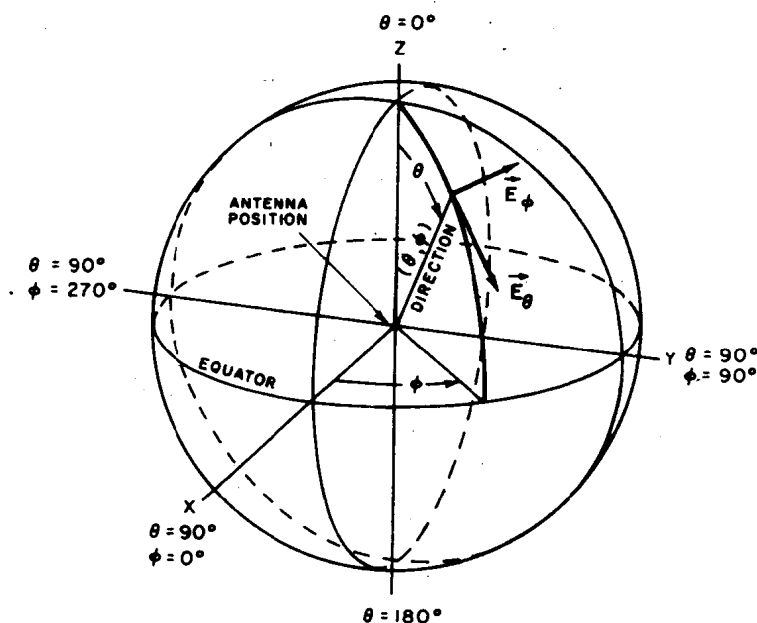


Fig 2

Standard Spherical Coordinate System Used in Antenna Measurements

tion is treated as a parameter, with the radiation pattern being measured at specified frequencies. For some antenna applications it is necessary to make frequency a variable. If frequency is varied continuously, such a procedure is called a swept-frequency technique; it is discussed in 7.4. It is impractical to measure the radiation pattern of an antenna completely, and therefore it is necessary to resort to sampling techniques. For example, with the frequency of operation and polarization fixed, the θ coordinate can be varied incrementally, and for each increment the desired antenna property can be measured continuously over the range of ϕ . If the increments are small enough, then for all practical purposes the complete antenna pattern is obtained. The resulting patterns taken for all increments of θ are usually referred to as a set of radiation patterns.

There are situations in which the operational

antenna illuminates structures in its immediate vicinity which alter the radiation field of the isolated antenna. In these cases it may be necessary for measurements of the radiation field to include with the antenna those relevant parts of the nearby structures. The use of scale models is quite common for such cases (see 7.1). Throughout this standard the expression "test antenna" or, alternately, "antenna under test" shall mean the antenna itself plus any structure included with it. This means that the test antenna can be physically larger than the antenna alone.

3.2 Pattern Cuts. A direct method of measuring the radiation pattern of a test antenna is to employ a suitable source antenna, which can be positioned in such a manner that it moves relative to the test antenna along lines of constant θ and constant ϕ (see Fig 2). The loci of constant θ directions describe cones;