


A. E. Fitzgerald

Charles Kingsley, Jr.

Stephen D. Umans

ELECTRIC MACHINERY

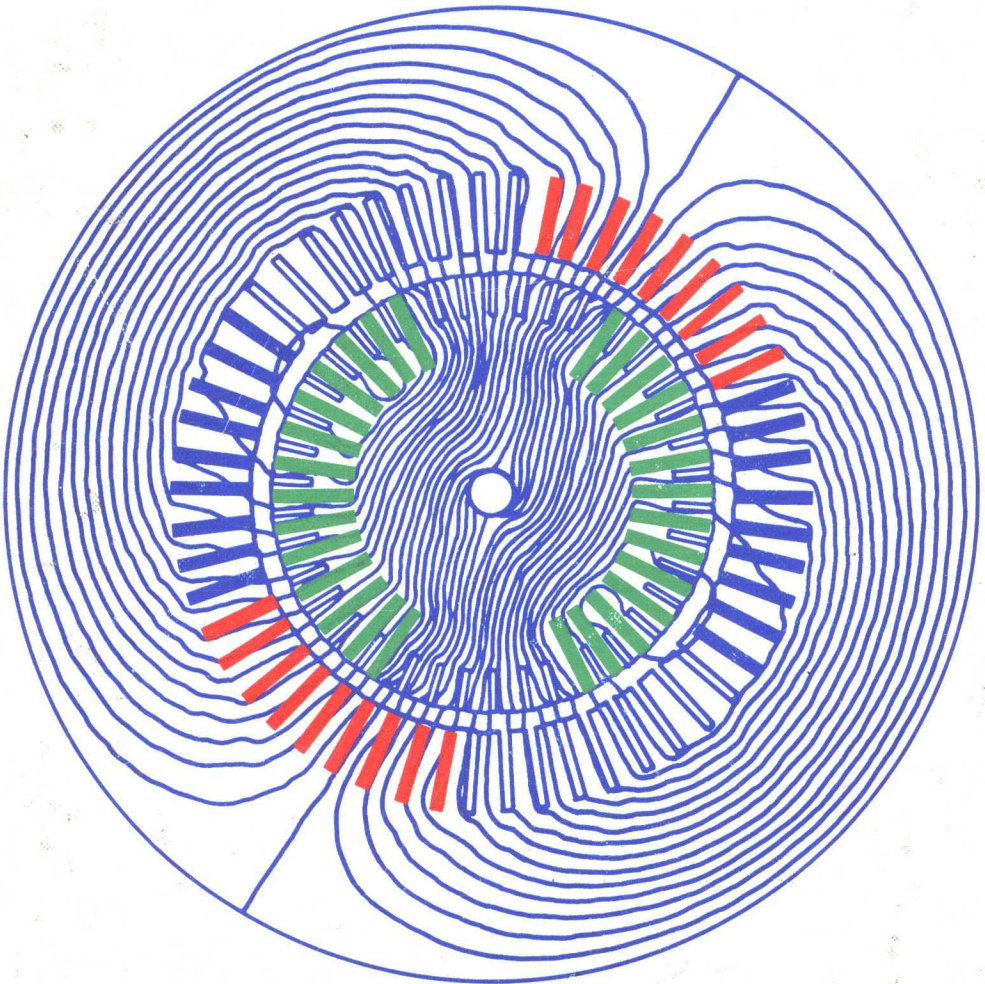

fourth edition
ELECTRIC MACHINERY

A. E. Fitzgerald

Late Vice President for Academic Affairs
and Dean of the Faculty
Northeastern University

Charles Kingsley, Jr.

Associate Professor of Electrical Engineering, Emeritus
Massachusetts Institute of Technology

Stephen D. Umans

Principal Research Engineer
Department of Electrical Engineering and Computer Science
Electric Power System Engineering Laboratory
Massachusetts Institute of Technology

McGraw-Hill Book Company

New York St. Louis San Francisco Auckland Bogotá Hamburg
Johannesburg London Madrid Mexico Montreal New Delhi
Panama Paris São Paulo Singapore Sydney Tokyo Toronto

ELECTRIC MACHINERY

Copyright © 1983, 1971, 1961 by McGraw-Hill, Inc. All rights reserved.
Copyright 1952 by McGraw-Hill, Inc. All rights reserved.
Copyright renewed 1980 by Rosemary Fitzgerald and Charles Kingsley, Jr.
Printed in the United States of America. Except as permitted under the
United States Copyright Act of 1976, no part of this publication may be
reproduced or distributed in any form or by any means, or stored in a data
base or retrieval system, without the prior written permission of the
publisher.

1 2 3 4 5 6 7 8 9 0 DOCDOC 8 9 8 7 6 5 4 3 2

ISBN 0-07-021145-0

This book was set in Century Schoolbook by York Graphic Services, Inc.
The editors were T. Michael Slaughter and David A. Damstra;
the designer was Charles A. Carson;
the production supervisor was Leroy A. Young.
New drawings were done by J & R Services, Inc.
R. R. Donnelley & Sons Company was printer and binder.

Library of Congress Cataloging in Publication Data

Fitzgerald, A. E. (Arthur Eugene), date
Electric machinery.

(McGraw-Hill series in electrical engineering.

Power and energy)

Includes index.

1. Electric machinery. I. Kingsley, Charles,
date . II. Umans, Stephen D. III. Title.
IV. Series.

TK2181.F5 1983 621.31'042 82-7763
ISBN 0-07-021145-0 AACR2

ELECTRIC MACHINERY

McGraw-Hill Series in Electrical Engineering

Consulting Editor

Stephen W. Director, Carnegie-Mellon University

Networks and Systems
Communications and Information Theory
Control Theory
Electronics and Electronic Circuits
Power and Energy
Electromagnetics
Computer Engineering and Switching Theory
Introductory and Survey
Radio, Television, Radar, and Antennas

Previous Consulting Editors

Ronald M. Bracewell, Colin Cherry, James F. Gibbons, Willis W. Harman,
Hubert Heffner, Edward W. Herold, John G. Linvill, Simon Ramo,
Ronald A. Rohrer, Anthony E. Siegman, Charles Susskind, Frederick E. Terman,
John G. Truxal, Ernst Weber, and John R. Whinnery

Power and Energy

Consulting Editor

Stephen W. Director, Carnegie-Mellon University

Elgerd: ELECTRIC ENERGY SYSTEMS THEORY: An Introduction
Fitzgerald, Kingsley, and Umans: ELECTRIC MACHINERY
Odum and Odum: ENERGY BASIS FOR MAN AND NATURE
Stevenson: ELEMENTS OF POWER SYSTEM ANALYSIS

PREFACE

Like the three preceding editions of this book, the fourth edition presents a unified treatment of the basic theory of electromechanical devices with especial emphasis on the applications, control, and limitations of rotating electric machinery. Much of the text is taken from the best parts of the second and third editions, rearranged in a more logical sequence, and rewritten.

The topic of power electronics has received considerable attention in the past decade. A number of textbooks have been written on the subject, and it is available as a separate course in many electrical engineering curricula. It certainly requires more than a single chapter to do it justice. As a result, the chapter on solid-state motor control has been eliminated from the fourth edition. However, the concepts of solid-state control as applied to electric machinery have been retained in the form of an article discussing dc motor drives in Chapter 6 and an article discussing variable-frequency ac motor drives in Chapter 10.

This bit of reorganization gave us room to add some new material and to reinstate some material which had been included in the second edition. For example, the technique of the transformation to $dq0$ variables, so useful in the transient analysis of ac machinery, is again included. In addition, the book has been rearranged with the hope that it will be easier to use.

The first four chapters provide a basic introduction to the topic of energy conversion and to rotating electric machinery. The material of the second chapter on electromechanical energy conversion is often felt to be too mathematical for an introductory undergraduate course on electric machinery. In this edition, it has been written in such a fashion that the first two sections can serve as an overview of the topic and the rest of the chapter can be omitted if desired without a loss of understanding in the remainder of the book.

The chapters on dc, synchronous, and induction machinery have been grouped in pairs. In each of these groupings, the first chapter serves as an

introduction to the machine type, develops the basic models, and applies them to the steady-state performance of the machine. The second chapter then deals with the issues associated with the control and transient behavior of the machine as well as some of the more subtle issues not required for the development of the basic models.

This book does not require a level of mathematical sophistication beyond that given in undergraduate courses in basic physics and circuit theory. The emphasis is on physical understanding as the basis for mathematical models.

Obviously more material is presented than can be treated in the time available in the typical curriculum. Moreover, the detailed content and order of subject matter are naturally governed by local circumstances and the desires and enthusiasms of individual instructors. For these reasons, particular attention is given to flexibility of use without loss of continuity. Browsing in the book for an hour or two and reading the introductory paragraphs of each chapter should enable an instructor to outline a variety of courses with differing content and sequence. Furthermore the book should serve the student as a reference text during his subsequent professional career.

The untimely death of Dr. A. E. Fitzgerald in July 1978 was a great loss of a coauthor and personal friend of many years. His sound intuitive judgment and lucid writing style are contributions that are hard to replace. However, much of his writing taken from the earlier editions has been retained in this fourth edition.

During the preliminary planning for the fourth edition, Dr. Alexander Kusko, a coauthor of the third edition, decided that he could no longer spare the time from his active consulting business to take part in the revision.

With the loss of these two coauthors I feel very fortunate to have been able to interest Dr. Stephen D. Umans in joining me in this new edition. Without his energy, enthusiasm, and conscientious adherence to a time schedule, the production of the fourth edition would have been difficult. From my point of view I have found working with him to be a very satisfying experience.

Charles Kingsley, Jr.

ELECTRIC MACHINERY

CONTENTS

Preface	xi
1/Magnetic Circuits and Transformers	1
1-1 INTRODUCTION TO MAGNETIC CIRCUITS	2
1-2 FLUX LINKAGE, INDUCTANCE, AND ENERGY	9
1-3 PROPERTIES OF MAGNETIC MATERIALS	14
1-4 AC EXCITATION	17
1-5 INTRODUCTION TO TRANSFORMERS	24
1-6 NO-LOAD CONDITIONS	26
1-7 EFFECT OF SECONDARY CURRENT; IDEAL TRANSFORMER	30
1-8 TRANSFORMER REACTANCES AND EQUIVALENT CIRCUITS	33
1-9 ENGINEERING ASPECTS OF TRANSFORMER ANALYSIS	38
1-10 TRANSFORMERS IN THREE-PHASE CIRCUITS	48
1-11 THE PER UNIT SYSTEM	52
1-12 AUTOTRANSFORMERS; MULTICIRCUIT TRANSFORMERS	57
1-13 SUMMARY	60
PROBLEMS	62
2/Electromechanical Energy-Conversion Principles	71
2-1 FORCES AND TORQUES IN MAGNETIC FIELD SYSTEMS	72
2-2 ENERGY BALANCE	76
2-3 ENERGY AND FORCE IN SINGLY EXCITED MAGNETIC FIELD SYSTEMS	78
2-4 DETERMINATION OF MAGNETIC FORCE; COENERGY	83
2-5 MULTIPLE EXCITED MAGNETIC FIELD SYSTEMS	90
2-6 DYNAMIC EQUATIONS	94
2-7 ANALYTICAL TECHNIQUES	99
2-8 SUMMARY	104
PROBLEMS	105

3/Rotating Machines: Basic Concepts	117
3-1 ELEMENTARY CONCEPTS	117
3-2 INTRODUCTION TO AC AND DC MACHINES	120
3-3 MMF OF DISTRIBUTED WINDINGS	131
3-4 MAGNETIC FIELDS IN ROTATING MACHINERY	140
3-5 ROTATING MMF WAVES IN AC MACHINES	143
3-6 GENERATED VOLTAGE	150
3-7 TORQUE IN NON-SALIENT-POLE MACHINES	155
3-8 SUMMARY	165
PROBLEMS	167
4/Engineering Aspects of Practical Electric-Machine Performance	175
4-1 MAGNETIC SATURATION	175
4-2 LEAKAGE FLUXES	178
4-3 LOSSES	181
4-4 RATING AND HEATING	184
4-5 COOLING MEANS FOR ELECTRIC MACHINES	188
4-6 EXCITATION SOURCES	190
4-7 ENERGY EFFICIENCY OF ELECTRIC MACHINERY	193
4-8 THE NATURE OF MACHINERY PROBLEMS	194
4-9 SUMMARY	196
PROBLEMS	197
5/DC Machines: Steady State	201
5-1 INTRODUCTION TO DC MACHINES	201
5-2 COMMUTATOR ACTION	208
5-3 EFFECT OF ARMATURE MMF	211
5-4 ANALYTICAL FUNDAMENTALS: ELECTRIC-CIRCUIT ASPECTS	214
5-5 ANALYTICAL FUNDAMENTALS: MAGNETIC-CIRCUIT ASPECTS	217
5-6 ANALYSIS OF STEADY-STATE PERFORMANCE	221
5-7 COMMUTATION AND INTERPOLES	230
5-8 COMPENSATING WINDINGS	233
5-9 SUMMARY; DC MACHINE APPLICATIONS	235
PROBLEMS	237
6/DC Machine Dynamics and Control	247
6-1 DC MOTOR SPEED CONTROL	247
6-2 DYNAMIC EQUATIONS	251

6-3	TRANSFER FUNCTIONS AND BLOCK DIAGRAMS OF DC MACHINES	254
6-4	EFFECTS OF SATURATION: SELF-EXCITED GENERATORS	266
6-5	INTRODUCTION TO RECTIFIER CIRCUITS	270
6-6	SOLID-STATE DC MOTOR-DRIVE SYSTEMS	280
6-7	AN ELEMENTARY MOTOR-SPEED REGULATOR	290
6-8	METADYNES AND AMPLIDYNES	295
6-9	SUMMARY	298
	PROBLEMS	299
7/	Synchronous Machines: Steady State	311
7-1	INTRODUCTION TO POLYPHASE SYNCHRONOUS MACHINES	312
7-2	SYNCHRONOUS-MACHINE INDUCTANCES; EQUIVALENT CIRCUITS	314
7-3	OPEN- AND SHORT-CIRCUIT CHARACTERISTICS	320
7-4	STEADY-STATE POWER-ANGLE CHARACTERISTICS	328
7-5	STEADY-STATE OPERATING CHARACTERISTICS	334
7-6	EFFECTS OF SALIENT POLES; INTRODUCTION TO DIRECT- AND QUADRATURE-AXIS THEORY	339
7-7	POWER-ANGLE CHARACTERISTICS OF SALIENT-POLE MACHINES	345
7-8	INTERCONNECTED SYNCHRONOUS GENERATORS	349
7-9	SUMMARY	351
	PROBLEMS	352
8/	Synchronous Machines: Transient Performance	361
8-1	SYNCHRONOUS-MACHINE TRANSIENTS	362
8-2	TRANSFORMATION TO DIRECT- AND QUADRATURE-AXIS VARIABLES	364
8-3	BASIC MACHINE RELATIONS IN $dq0$ VARIABLES	367
8-4	ANALYSIS OF A SUDDEN THREE-PHASE SHORT CIRCUIT	371
8-5	TRANSIENT POWER-ANGLE CHARACTERISTICS	379
8-6	EFFECTS OF ADDITIONAL ROTOR CIRCUITS	382
8-7	MODELS OF SYNCHRONOUS MACHINES FOR TRANSIENT ANALYSIS	386
8-8	SYNCHRONOUS-MACHINE DYNAMICS	390
8-9	SUMMARY	398
	PROBLEMS	399

9/Polyphase Induction Machines	409
9-1 INTRODUCTION TO POLYPHASE INDUCTION MACHINES	409
9-2 CURRENTS AND FLUXES IN INDUCTION MACHINES	413
9-3 THE INDUCTION-MOTOR EQUIVALENT CIRCUIT	416
9-4 ANALYSIS OF THE EQUIVALENT CIRCUIT	420
9-5 TORQUE AND POWER BY USE OF THEVENIN'S THEOREM	424
9-6 PERFORMANCE CALCULATIONS FROM NO-LOAD AND BLOCKED-ROTOR TESTS	429
9-7 SUMMARY	435
PROBLEMS	436
10/Polyphase-Induction-Machine Dynamics and Control	443
10-1 EFFECTS OF ROTOR RESISTANCE; DOUBLE-SQUIRREL- CAGE ROTORS	444
10-2 INDUCTION-MACHINE DYNAMICS	452
10-3 SPEED CONTROL OF INDUCTION MOTORS	455
10-4 ELECTRICAL TRANSIENTS IN INDUCTION MACHINES	459
10-5 APPLICATION OF ADJUSTABLE-SPEED SOLID-STATE AC MOTOR DRIVES	463
10-6 SUMMARY	469
PROBLEMS	469
11/Fractional-Horsepower AC Motors	479
11-1 SINGLE-PHASE INDUCTION MOTORS: QUALITATIVE EXAMINATION	480
11-2 STARTING AND RUNNING PERFORMANCE OF SINGLE- PHASE INDUCTION AND SYNCHRONOUS MOTORS	483
11-3 REVOLVING-FIELD THEORY OF SINGLE-PHASE INDUCTION MOTORS	491
11-4 UNBALANCED OPERATION OF SYMMETRICAL TWO- PHASE MACHINES; THE SYMMETRICAL-COMPONENT CONCEPT	498
11-5 TWO-PHASE CONTROL MOTORS	503
11-6 SERIES UNIVERSAL MOTORS	507
11-7 STEPPER MOTORS	508
11-8 AC TACHOMETERS	512
11-9 SYNCHROS AND CONTROL TRANSFORMERS	514
11-10 SUMMARY	518
PROBLEMS	519

Appendix A/Three-Phase Circuits	525
A-1 GENERATION OF THREE-PHASE VOLTAGES	526
A-2 THREE-PHASE VOLTAGES, CURRENTS, AND POWER	528
A-3 Y- AND Δ -CONNECTED CIRCUITS	532
A-4 ANALYSIS OF BALANCED THREE-PHASE CIRCUITS; SINGLE-LINE DIAGRAMS	539
A-5 OTHER POLYPHASE SYSTEMS	541
Appendix B/Voltages, Magnetic Fields, and Inductances of Distributed AC Windings	543
B-1 GENERATED VOLTAGES	543
B-2 ARMATURE-MMF WAVES	555
B-3 AIR-GAP INDUCTANCES OF DISTRIBUTED WINDINGS	553
Appendix C/Table of Constants and Conversion Factors for SI Units	557
Index	559



Magnetic Circuits and Transformers

The object of this book is to study the devices used in the interconversion of electric and mechanical energy. Emphasis is placed on electromagnetic rotating machinery, by means of which the bulk of this energy conversion takes place. Attention is also paid to the transformer, which, although not an electromechanical energy-conversion device, is an important component in the overall problem of energy conversion. Moreover, in many respects its analysis uses techniques closely related to those required for rotating machinery.

Practically all transformers and electric machinery use magnetic material for shaping and directing the magnetic fields which act as the medium for transferring and converting energy. Thus the ability to analyze and describe magnetic field quantities is an essential tool for understanding these devices. Magnetic materials play a large role in determining the properties of a piece of electromagnetic equipment and affect its size and efficiency.

This chapter will develop some basic tools for the analysis of magnetic

field systems and will provide a brief introduction to the properties of practical magnetic materials. These results will then be applied to the analysis of transformers. In later chapters they will be used in the analysis of rotating machinery.

In this book it is assumed that the reader has basic knowledge of magnetic and electric field theory such as given in a basic physics course for engineering students. Other readers may have had a course on electromagnetic field theory based on Maxwell's equations, but an understanding of Maxwell's equations is not a prerequisite for study of this book. The pertinent basic equations will be introduced in simplified form when required.

1-1 INTRODUCTION TO MAGNETIC CIRCUITS

The complete, detailed solution for magnetic fields in most situations of practical engineering interest involves the solution of Maxwell's equations along with various constitutive relationships which describe material properties. Although in practice exact solutions are often unattainable, various simplifying assumptions permit the attainment of useful engineering solutions.

The first assumption is that for the types of electric machines and transformers treated in this book the frequencies and sizes involved are such that the displacement-current term in Maxwell's equations can be neglected. This term accounts for magnetic fields being produced in space by time-varying electric fields and is associated with electromagnetic radiation. Neglecting this term results in the *magneto-quasi-static* form of Maxwell's equations. By this we mean that the magnetic field quantities are determined solely by the instantaneous values of the source currents and that the time variation of the magnetic fields follow directly from the time variations of the sources.

A second simplifying assumption involves the concept of the *magnetic circuit*. The general solution for the *magnetic field intensity* \mathbf{H} and the *magnetic flux density* \mathbf{B} in a structure of complex geometry is extremely difficult. However, a three-dimensional field problem can often be reduced to what is essentially a one-dimensional circuit equivalent, yielding solutions of acceptable engineering accuracy.

A magnetic circuit consists of a structure composed for the most part of high-permeability magnetic material. The presence of high-permeability material causes the magnetic flux to be confined to the paths defined by the structure, much as currents are confined to the conductors of an electric circuit. Use of this concept of the magnetic circuit is illustrated in this article and will be seen to apply quite well to many situations in this book.†

A simple example of a magnetic circuit is shown in Fig. 1-1. The core is

†For a more extensive treatment of magnetic circuits see A. E. Fitzgerald, D. E. Higgenbotham, and A. Grabel, "Basic Electrical Engineering," 5th ed., McGraw-Hill, New York, 1981, chap. 13; also E. E. Staff, MIT, "Magnetic Circuits and Transformers," MIT Press, Cambridge, Mass., 1965, chaps. 1 to 3.

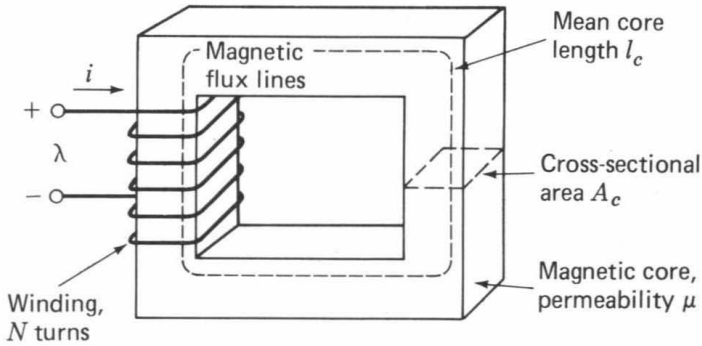


Fig. 1-1. Simple magnetic circuit.

assumed to be composed of magnetic material whose permeability is much greater than that of the surrounding air. The core is of uniform cross section and is excited by a winding of N turns carrying current i amperes (A). This winding produces a magnetic field in the core, as shown in the figure. The magnetic field can be visualized in terms of flux lines, which form closed loops interlinked with the winding. The basic relation between current i and the magnetic field intensity \mathbf{H} states that the line integral of \mathbf{H} around a closed path is equal to the net current enclosed by that path.

As applied to the magnetic circuit of Fig. 1-1, the source of the magnetic field in the core is the ampere-turn product Ni . In magnetic-circuit terminology Ni is the *magnetomotive force* (mmf) \mathcal{F} . Although Fig. 1-1 shows only a single coil, transformers and most rotating machines have at least two windings and Ni is the algebraic sum of the ampere-turns of all the windings. Under the assumption of uniform magnetic flux density across the core cross section, the line integral of \mathbf{H} becomes simply the scalar product $H_c l_c$, of the magnitude of \mathbf{H} along the mean flux path whose length is l_c . Thus, the relationship between the mmf and the magnetic field intensity can be written in magnetic-circuit terminology as

$$\mathcal{F} = Ni = H_c l_c \quad (1-1)$$

The direction of H_c in the core can be found from the *right-hand rule*, which can be stated in two equivalent ways. (1) Imagine a current-carrying conductor held in the right hand with the thumb pointing in the direction of current flow; the fingers then point in the direction of the magnetic field created by that current. (2) Equivalently, if the coil in Fig. 1-1 is grasped in the right hand (figuratively speaking) with the fingers pointing in the direction of the current, the thumb will point in the direction of the magnetic fields.

The relationship between the magnetic field intensity \mathbf{H} and the magnetic flux density \mathbf{B} is a property of the region in which the field exists; thus

$$\mathbf{B} = \mu \mathbf{H} \quad (1-2)$$

where μ is the *permeability*. In SI units \mathbf{B} is in *webers per square meter*, known as *teslas* (T), and μ is in *webers per ampere-turn-meter*, or equivalently *henrys per meter*. In SI units the permeability of free space is $\mu_0 = 4\pi \times 10^{-7}$. The permeability of ferromagnetic material can be expressed in terms of μ_r , its value relative to that of free space, or $\mu = \mu_r \mu_0$. Typical values of μ_r range from 2000 to 80,000 for materials used in transformers and rotating machines. The characteristics of ferromagnetic materials are described in Arts. 1-3 and 1-4. For the present we shall assume that μ_r is a known constant, although it actually varies appreciably with magnetic flux density.

Because of the high permeability of the magnetic core, the magnetic flux is confined almost entirely to the core, the field lines follow that path defined by the core, and the flux density is essentially uniform over a cross section because the cross-sectional area is uniform.

The *magnetic flux* ϕ crossing an area is the surface integral of the normal component of \mathbf{B} ; thus

$$\phi = \int_S \mathbf{B} \cdot d\mathbf{a} \quad (1-3)$$

In SI units ϕ is in *webers*. In terms of field theory the continuity-of-flux equation

$$\oint_S \mathbf{B} \cdot d\mathbf{a} = 0 \quad (1-4)$$

states that the net magnetic flux crossing all surfaces of a three-dimensional closed surface (equal to the surface integral of B over that closed surface) is zero. This is equivalent to saying that all the flux which enters the surface enclosing a volume must leave that volume over some other portion of that surface because magnetic flux lines form closed loops. When flux outside the core is neglected, Eq. 1-3 reduces to the simple scalar equation

$$\phi_c = B_c A_c \quad (1-5)$$

where ϕ_c = the flux in core

B_c = flux density in the core

A_c = cross-sectional area of the core

The area is assumed to be constant throughout the length of the magnetic path. Because the field lines form closed loops, the flux is continuous throughout the length of the core.

Transformers are wound on closed cores like that of Fig. 1-1. Energy-conversion devices which incorporate a moving element must have air gaps in their magnetic circuits. A magnetic circuit with an air gap is shown in Fig. 1-2. When the air-gap length g is much smaller than the dimensions of the adja-