


FRANCIS H. RAVEN

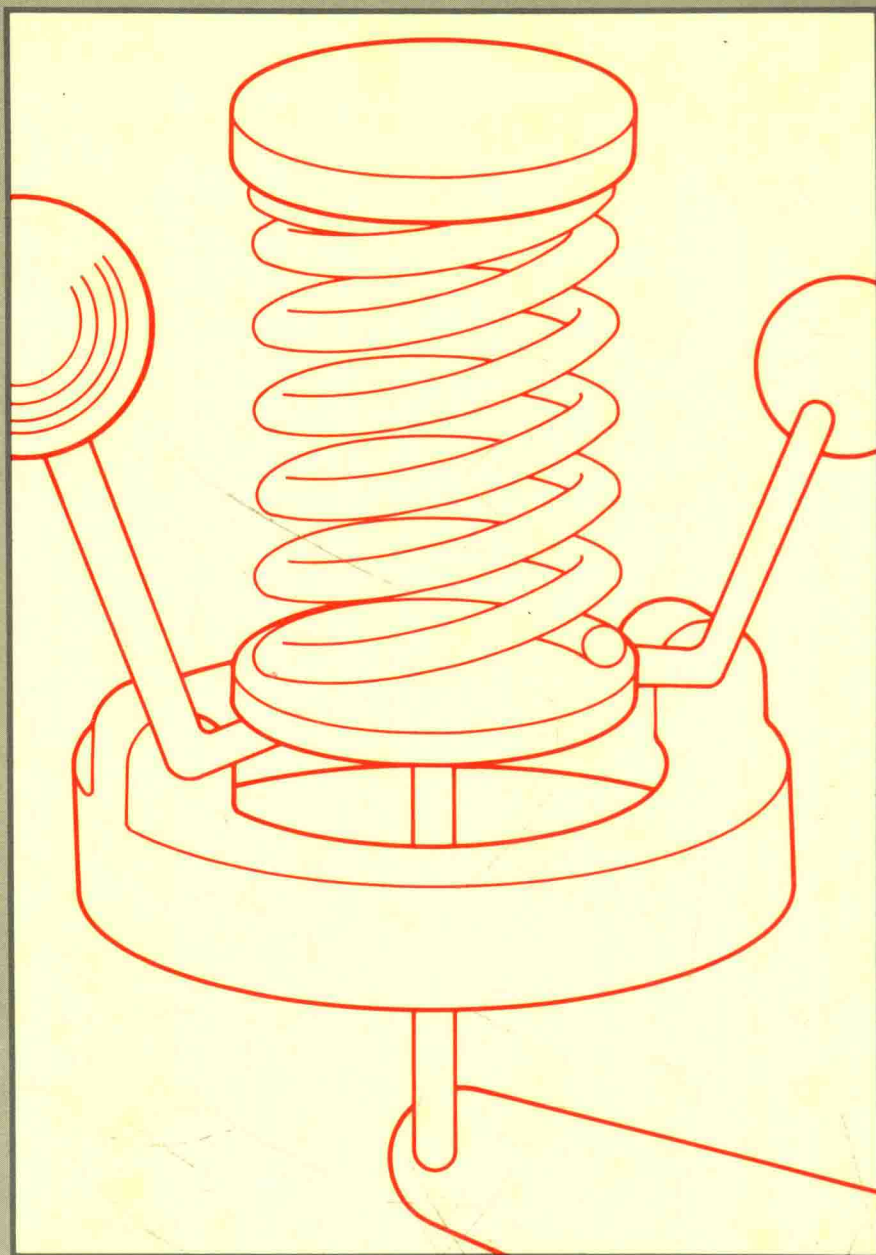

AUTOMATIC CONTROL ENGINEERING

FOURTH EDITION

AUTOMATIC CONTROL ENGINEERING

Fourth Edition

Francis H. Raven

*Professor of Mechanical Engineering
University of Notre Dame*

McGraw-Hill Book Company

New York St. Louis San Francisco Auckland Bogotá Hamburg
Johannesburg London Madrid Mexico Milan Montreal New Delhi
Panama Paris São Paulo Singapore Sydney Tokyo Toronto

This book was set in Times Roman by Santype International Limited.
The editor was Anne Duffy; the cover was designed by Scott Chelius;
the production supervisor was Diane Renda.
Project supervision was done by Santype International Limited.
R. R. Donnelley & Sons Company was printer and binder.

AUTOMATIC CONTROL ENGINEERING

Copyright © 1987, 1978, 1968, 1961 by McGraw-Hill, Inc. All rights reserved. Printed in the United States of America. Except as permitted under the United States Copyright Act of 1976, no part of this publication may be reproduced or distributed in any form or by any means, or stored in a data base or retrieval system, without the prior written permission of the publisher.

234567890 DOCDOC 8943210987

ISBN 0-07-051233-7

Library of Congress Cataloging-in-Publication Data

Raven, Francis H. (Francis Harvey).

Automatic control engineering.

(McGraw-Hill series in mechanical engineering)

Includes bibliographical references and index.

1. Automatic control. I. Title. II. Series.

TJ213.R38 1987 629.8'3 86-10705

ISBN 0-07-051233-7

AUTOMATIC CONTROL ENGINEERING

McGraw-Hill Series in Mechanical Engineering

Jack P. Holman, *Southern Methodist University*
Consulting Editor

Anderson: *Modern Compressible Flow: With Historical Perspective*

Eckert and Drake: *Analysis of Heat and Mass Transfer*

Hinze: *Turbulence*

Hutton: *Applied Mechanical Vibrations*

Juvinall: *Engineering Considerations of Stress, Strain, and Strength*

Kane and Levinson: *Dynamics: Theory and Applications*

Kays and Crawford: *Convective Heat and Mass Transfer*

Martin: *Kinematics and Dynamics of Machines*

Phelan: *Dynamics of Machinery*

Phelan: *Fundamentals of Mechanical Design*

Pierce: *Acoustics: An Introduction to Its Physical Principles and Applications*

Raven: *Automatic Control Engineering*

Rosenberg and Karnopp: *Introduction to Physical System Dynamics*

Schlichting: *Boundary-Layer Theory*

Shames: *Mechanics of Fluids*

Shigley: *Kinematic Analysis of Mechanisms*

Shigley-Mitchell: *Mechanical Engineering Design*

Shigley and Uicker: *Theory of Machines and Mechanisms*

Stoecker and Jones: *Refrigeration and Air Conditioning*

Vanderplaats: *Numerical Optimization Techniques for Engineering Design:
With Applications*

To Therese

PREFACE

In recent years, automatic control systems have been rapidly increasing in importance in all fields of engineering. The applications of control systems cover a very wide range, from the design of precision control devices such as delicate electronic equipment to the design of massive equipment such as that used for the manufacture of steel or other industrial processes. Microprocessors have added a new dimension to the capability of control systems. New applications for automatic controls are continually being discovered.

This text is the outgrowth of notes developed by the author to teach control engineering at the University of Notre Dame. The author has endeavored to give the principles a thorough presentation and yet make them clear and easy to understand. It is assumed that the reader has the general maturity and background of a third- or fourth-year engineering student, but no previous training in control engineering.

Although the principles of feedback control systems are presented in a manner which is appropriate to the interests of mechanical engineers, this text has also been successfully used to teach students in other fields of engineering. In addition, the author has taught night courses for practicing engineers. In the light of their enthusiastic comments, it is felt that this book will be of much value to the engineer in industry who did not have the opportunity to take such a course while in college.

The study of control engineering is begun by showing how typical control systems may be represented by block diagrams. This is accomplished by first demonstrating how to represent each component or part of a system as a simple block diagram, then explaining how these individual diagrams may be connected to form the overall block diagram, just as the actual components are connected to form the complete control system. Because actual control systems frequently contain nonlinear components, considerable emphasis is given to such com-

ponents. This material is presented in the first three chapters. In the fourth chapter, it is shown that much important information concerning the basic or inherent operating characteristics of a system may be obtained from knowledge of the steady-state behavior.

This introduction to control theory differs from the usual "black-box" approach, in which the block diagram for a system is given outright. The "black-box" approach permits the introduction of Laplace transforms and other methods of system analysis at an earlier stage. However, it has been the author's experience that students attain a deeper understanding of the various techniques used in system analysis if they are first familiarized with the physical significance of feedback controls.

In Chapter 5, it is shown how the linear differential equations which describe the operation of control systems may be solved algebraically by the use of Laplace transforms. It is seen that this method reveals directly much interesting information about systems. General characteristics of transient behavior are described in Chapter 6. It is pointed out that the transient response is governed by the location of the roots of the characteristic equation. It is also shown how to program a digital computer for investigating the performance of control systems. The application of the root-locus method to the design of control systems is the topic of Chapter 7. The use of the analog computer to simulate control systems is explained in Chapter 8.

State-space methods are presented in Chapter 9. It is shown how the concepts of classical control theory are combined with state-space concepts to yield the "modern" control theory. By seeing how "modern" control theory builds on classical methods, the reader attains both a better understanding of modern methods and a deeper appreciation of the classical formulation. Digital computers and microprocessors are becoming increasingly important as elements of control systems. As is explained in Chapter 10, most of the methods (both classical and modern) used in the design of continuous-data systems may be extended to digital-control systems. The term digital-control system comprises a broad class of systems including computer-controlled systems, discrete-data systems, sampled-data systems, and time sharing systems. The use of frequency-response techniques to evaluate dynamic performance is explained in Chapters 11 and 12.

McGraw-Hill and the author wish to express their appreciation for the many fine suggestions made by teachers who have used the previous editions. These suggestions have been of great value in the preparation of this revised edition. Special gratitude is owed to Professor Haim Baruh, Rutgers University; Professor Celal Batur, University of Akron; Professor Ronald Bottaccini, University of Wisconsin; Professor Frank D'Souza, Illinois Institute of Technology; Professor Robert G. Leonard, Virginia Polytechnic Institute and State University; Professor Robert A. Medrow, University of Missouri, Rolla; Professor Ioannis O. Pendelidis, University of Maryland; Professor David J. Purdy, Texas A&M University; Professor Robert A. Smoak, Tennessee Technological University; and Professor Gerald Whitehouse, Louisiana State University, who reviewed the entire manuscript. Students have also been very helpful in their comments. Particular recognition is due to Betty Raven.

The author also wishes to express his gratitude for the continued encouragement of his colleagues at the University of Notre Dame, especially to Professor Albin A. Szewczyk, Chairman of the Department of Aerospace and Mechanical Engineering and to Roger A. Schmitz, Keating-Crawford Professor, and Dean, College of Engineering. Thanks are also due to Ms. Susan Jensen for her typing of the numerous revisions of the notes from which this textbook has been developed.

The author's wife, Therese, has faithfully worked with him throughout the development of this text. She has made innumerable suggestions and has been a constant source of encouragement.

Francis H. Raven

CONTENTS

| | |
|---|----|
| Preface | xi |
| Chapter 1 Introduction to Automatic Controls | 1 |
| 1.1 Historical Development | 1 |
| 1.2 Feedback Control Systems | 2 |
| 1.3 System Representation | 4 |
| 1.4 Modern Control Systems | 6 |
| Chapter 2 Representation of Control Components | 8 |
| 2.1 Operational Notation | 9 |
| 2.2 Mechanical Components | 14 |
| 2.3 Electrical Components | 18 |
| 2.4 Series and Parallel Laws | 19 |
| 2.5 Analogies | 26 |
| 2.6 Scale Factors | 29 |
| 2.7 Thermal Systems | 33 |
| 2.8 Fluid Systems | 36 |
| Chapter 3 Representation of Control Systems | 48 |
| 3.1 Linearization of Nonlinear Functions | 48 |
| 3.2 Linearization of Operating Curves | 58 |
| 3.3 Hydraulic Systems | 62 |
| 3.4 Pneumatic Systems | 70 |
| 3.5 DC Motors | 74 |
| 3.6 AC Motors | 79 |
| 3.7 Block-Diagram Algebra | 80 |
| 3.8 Speed Control Systems | 83 |
| 3.9 Generalized Feedback Control System | 90 |

| | | |
|------------------|--|-----|
| Chapter 4 | Steady-State Operation | 105 |
| 4.1 | Steady-State Analysis | 105 |
| 4.2 | Equilibrium | 113 |
| 4.3 | Proportional Control Systems | 116 |
| 4.4 | Integral Control Systems | 121 |
| 4.5 | Proportional Plus Integral Control Systems | 123 |
| 4.6 | Modes of Control | 126 |
| Chapter 5 | Laplace Transforms | 135 |
| 5.1 | Classical Methods | 136 |
| 5.2 | Laplace Transform Method | 144 |
| 5.3 | Transform Properties | 148 |
| 5.4 | Initial Conditions | 162 |
| 5.5 | General Procedures | 168 |
| 5.6 | Piecewise Continuous Functions | 174 |
| 5.7 | Convolution Integral | 177 |
| 5.8 | Error Coefficients | 180 |
| Chapter 6 | Transient Response | 192 |
| 6.1 | Inverse Transformations | 194 |
| 6.2 | Complex Conjugate Zeros | 196 |
| 6.3 | Damping Ratio and Natural Frequency | 202 |
| 6.4 | Computer Solution | 208 |
| 6.5 | Transient Response Specifications | 217 |
| 6.6 | General Form of Transient Response | 221 |
| 6.7 | Response to an External Disturbance | 223 |
| 6.8 | Routh's Stability Criterion | 225 |
| 6.9 | Summary | 229 |
| Chapter 7 | The Root-Locus Method | 240 |
| 7.1 | Significance of Root Loci | 240 |
| 7.2 | Construction of Loci | 246 |
| 7.3 | General Procedure | 256 |
| 7.4 | Newton's Method and the Remainder Theorem | 266 |
| 7.5 | Loci Equations | 269 |
| 7.6 | Variation of Parameters | 271 |
| 7.7 | Computer Solution | 277 |
| 7.8 | Sensitivity | 278 |
| Chapter 8 | Analog Computers | 292 |
| 8.1 | Computer Operations | 293 |
| 8.2 | Direct Programming | 297 |
| 8.3 | Time Scale | 308 |
| 8.4 | Simulation | 313 |

| | | |
|-------------------|---|-----|
| Chapter 9 | State-Space Methods | 329 |
| 9.1 | System Representation | 329 |
| 9.2 | Signal-Flow Graphs | 342 |
| 9.3 | Solution of State-Space Equations | 349 |
| 9.4 | Methods of Computing $\Phi(t)$ | 353 |
| 9.5 | Forced Response | 362 |
| 9.6 | Transfer Functions | 369 |
| 9.7 | Multivariable Systems | 374 |
| | | |
| Chapter 10 | Digital-Control Systems | 390 |
| 10.1 | Sampled-Data Systems | 390 |
| 10.2 | The z Transform | 392 |
| 10.3 | Inverse z Transforms | 401 |
| 10.4 | Block-Diagram Algebra | 409 |
| 10.5 | Transient Response | 414 |
| 10.6 | Filters | 421 |
| 10.7 | Discrete-Data Systems | 427 |
| 10.8 | Sampled-Data Control Systems | 434 |
| 10.9 | Computer-Controlled Systems | 440 |
| | | |
| Chapter 11 | Frequency-Response Methods | 455 |
| 11.1 | Frequency Response | 455 |
| 11.2 | Logarithmic Representation | 461 |
| 11.3 | Evaluating the Gain K | 470 |
| 11.4 | Equivalent Unity-Feedback Systems | 473 |
| 11.5 | Polar Plots | 474 |
| 11.6 | M and α Circles | 477 |
| 11.7 | Correlation between Transient and Frequency Response | 480 |
| 11.8 | Determining the Gain K to Yield a Desired M_p | 490 |
| | | |
| Chapter 12 | System Compensation | 504 |
| 12.1 | Nyquist Stability Criterion | 504 |
| 12.2 | Gain Margin and Phase Margin | 513 |
| 12.3 | Lead Compensation | 519 |
| 12.4 | Lag Compensation | 526 |
| 12.5 | Lag-Lead Compensation | 530 |
| 12.6 | Internal Feedback | 533 |
| 12.7 | Inverse Polar Plots | 534 |
| 12.8 | Stability Criteria in the Inverse Plane | 540 |

| | | |
|----------|---|-----|
| | Appendices | 551 |
| A | Equilibrium Flow | 551 |
| B | Fourier Series, Fourier Integral, and Laplace Transform | 556 |
| | B.1 Fourier Series | 556 |
| | B.2 Fourier Integral | 558 |
| | B.3 Laplace Transform | 559 |
| | Index | 561 |

INTRODUCTION TO AUTOMATIC CONTROLS

1.1 HISTORICAL DEVELOPMENT

Early people had to rely upon their own brute strength or that of beasts of burden to supply energy for doing work. By the use of simple mechanical devices such as wheels and levers, they accomplished such feats as the building of high pyramids and Roman highways and aqueducts. They first supplemented their energy and that of beasts by utilizing power from natural sources, such as the wind for powering sailing vessels and windmills, and waterfalls for turning water wheels. The invention of the steam engine was a milestone in human progress because it provided people with useful power that could be harnessed at will. Since then, people have devised many different means for obtaining abundant and convenient sources of energy. Engineering effort is primarily concerned with the practical applications of using power to serve human purposes. That is, the engineer designs and develops machines and equipment by which people can utilize power.

Early machines and equipment had controls which were predominantly of a manual nature, and the adjustments had to be reset frequently in order to maintain the desired output or performance. The design of newer equipment with greater usefulness and capabilities is bringing about an ever-increasing growth in the development of control equipment. The reason is twofold. First, automatic controls relieve people of many monotonous activities so that they can devote their abilities to other endeavors. Second, modern complex controls can perform

functions which are beyond the physical abilities of people to duplicate. For example, an elaborate automatic control system operates the engine of a modern jet airplane with only a minimum amount of the pilot's attention so that the pilot is free to maneuver and fly the airplane.

It is interesting to note that, as the applications and uses for controls have increased, so also have the demands upon the performance of these systems increased. There is no doubt that a major concern of the engineer today, and even more so in the future, is, and will be, the design and development of automatic control systems.

1.2 FEEDBACK CONTROL SYSTEMS

Various forms of transportation are illustrated in Fig. 1.1. All of the basic concepts of feedback control systems are contained in each of these means of transportation. For the basic form of transportation, walking, the desired speed at which the walker wishes to go is the reference input. When taking a leisurely stroll through a park, the desired speed is slow. When in a hurry, the desired speed is fast. The actual speed is the controlled variable (i.e., the quantity being controlled). The part of a system which compares the reference input (desired value) with the controlled variable (actual value) in order to measure the error is called the comparator. The brain serves as the comparator for the walker. Typically, the error signal goes to a power-amplifying device (muscles in the legs) which actuates the system to be controlled so as to reduce the error to zero. Thus, the actual speed is the same as the desired speed.

The driver of a car compares the actual speed with the desired speed. Again the brain serves as the comparator. In response to the error signal, the driver changes the position of the accelerator pedal. The engine serves as the power-amplifying device. That is, a little motion of the accelerator pedal causes a substantial change in the power produced by the engine.

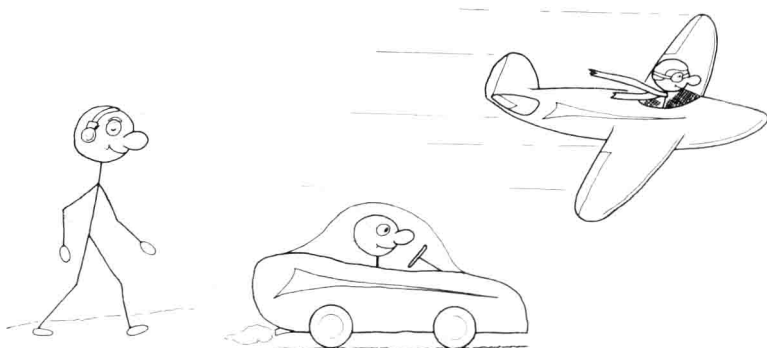


Figure 1.1 Various forms of transportation.

For cruise control, a magnet is attached to the drive shaft which rotates at some constant times the speed of the wheels. A magnetic pick-up fixed to the body of the car generates a pulse every time the drive shaft makes one complete rotation. The rate at which pulses are being generated is a measure of the actual speed of the car. At the instant the cruise control is set, the rate at which pulses are being generated is stored so as to serve as the reference input (i.e., desired speed). A vacuum-operated device is attached to the accelerator linkage. When the actual speed is greater than the reference speed, the rate at which pulses are being generated is greater than the reference value. This error signal goes to the vacuum device which serves as a power amplifier to change the position of the accelerator linkage so as to decrease the actual speed.

The most difficult problem which the Wright brothers encountered in the process of making the airplane into a useful machine was the control problem. After much experimentation, they developed an ingenious pulley system to coordinate the motion of the aileron and the rudder so as to produce a smooth turning effort. Note that the pilot (Orville or Wilbur) would compare the actual path of the plane with the desired path, and then in response to the error signal he would actuate the pulley system. Aerodynamic forces acting on the wings and rudder would serve as the power-amplifying device to change the trajectory of the plane. Although modern airplanes have much more sophisticated means for controlling the position of the ailerons and rudder, the principles are still the same.

The controlling of temperature is a typical example of a feedback control system. The position of the temperature dial sets the desired temperature (i.e., the reference input). The actual temperature of the system is the controlled variable (i.e., the quantity which is being controlled). The thermostat, or comparator, compares the actual temperature with the desired temperature in order to measure the error. This error signal is the actuating signal, which is then sent to the heating units in order to correct the temperature. For example, if the actual temperature is less than the desired temperature, the actuating signal causes the heating elements to supply more heat. If there is no error, the actuating signal does not change the amount of heat which is being supplied. When the actual temperature is greater than the desired value, then the actuating signal calls for a decrease in the amount of heat.

For a system to be classified as a feedback control system, it is necessary that the controlled variable be fed back and compared with the reference input. In addition, the resulting error signal must actuate the control elements (power-amplifying device) to change the output so as to minimize the error. A feedback control system is also called a closed-loop system. Any system which incorporates a thermostat to control temperature is a feedback, or closed-loop, system. Well-known examples are electric frying pans, irons, refrigerators, and household furnaces with thermostatic control.

For speed control systems, the device which subtracts the feedback signal from the reference input (i.e., the comparator) is oftentimes a centrifugal governor. The amount of compression of a spring sets a force which is a measure of the desired speed. The centrifugal force of the flyweights is a measure of the actual

speed. The difference in these forces is a measure of the error. The governor serves the same purpose that the thermostat does for temperature controls. That is, the governor compares the actual speed with the desired value and measures the error. This error signal then goes to a power amplifier such as a hydraulic servomotor which controls the position of a flow valve which in turn determines the rate of fuel flow to the engine. The same basic concepts apply to all types of feedback control systems, whether the controlled variable be temperature, speed, pressure, flow, position, force, torque, or any other physical quantity.

In an open-loop system there is no comparison of the controlled variable with the desired input. Each setting of the input determines a fixed operating position for the control elements. For example, for a given input temperature setting, the heating units are positioned to supply heat at a fixed rate. Note that there is no comparator, or thermostat, which measures the error and resets the heating units. The disadvantage of such a system is illustrated by the fact that if a fixed rate of heat is supplied to a house, the inside temperature will vary appreciably with changes in the outside temperature. Thus, for a given set input to an open-loop system, there may be a big variation of the controlled variable depending on the ambient temperature.

In this example, the ambient temperature is an external disturbance. By an external disturbance is meant something external to the system which acts to change or disturb the controlled variable. A major advantage of employing feedback control is that, because of the comparator, the actuating signal continually changes so that the controlled variable tends to become equal to the reference input regardless of the external disturbance. Another consideration is that with feedback one can generally use relatively inexpensive components and yet obtain better control than is possible with very expensive components in an open-loop system. The primary effort of this text will be devoted to feedback control systems.

1.3 SYSTEM REPRESENTATION

The mathematical relationships of control systems are usually represented by block diagrams. These diagrams have the advantage of indicating more realistically the actual processes which are taking place, as opposed to a purely abstract mathematical representation. In addition, it is easy to form the overall block diagram for an entire system by merely combining the block diagrams for each component or part of the system.

A comparator subtracts the feedback signal from the reference input r . For the case in which the controlled variable c is fed back directly (i.e., for unity-feedback systems), the signal coming from the comparator is $r - c$, which is equal to the actuating signal e . The mathematical relationship for this operation is

$$e = r - c \quad (1.1)$$