

微纳技术著作丛书（影印版）

执行器技术： 微机电方法

Emerging Actuator Technologies

Pons José L.



科学出版社

www.sciencep.com

执行器技术：微机电方法

Emerging Actuator Technologies

- Presents a mechatronic approach to the design, control and integration of a range of technologies covering piezoelectric actuators, shape memory actuators, electro-active polymers, magnetostrictive actuators and electro- and magnetorheological actuators.
- Examines the characteristics and performance of emerging actuators upon scaling to micro and nano domains.
- Assesses the relative merits of each actuator technology and outlines prospective application fields.

微纳技术著作丛书（影印版）

CMOS技术中的集成化学微传感系统

纳米晶体管：器件物理学，建模和仿真

微机械光子学

微纳制造

纳米力学与材料：理论、多尺度方法和应用

执行器技术：微机电方法

BioMEMS与医疗微器件基础

纳米科学与技术

CMOS-MEMS

微过程工程学：基础、器件、制造和应用

纳米技术：环境问题及解决方案

纳米物理学与纳米技术（第二版）

形成介观结构的纳米晶体

面向生物医学应用的纳米制造：技术、工具、应用及影响

纳米技术在通信和网络中的应用

纳米材料的生物功能化

生物及生物医学纳米技术

BioMEMS



ISBN 978-7-03-018258-6



9 787030 182586 >

销售分类建议：电子学/微机电

定价：45.00 元

微纳技术
著作丛书
(影印版)

执行器技术： 微机电方法

社
学

微纳技术著作丛书（影印版）

执行器技术：微机电方法

Pons José L.

科学出版社

北京

图字：01-2006-7268

内 容 简 介

执行器是将电能转换成机械能的装置，通常用于电气、气动、液压系统。由于执行器技术在生物医学、人工器官修复、器械矫形中应用的需要，对高效且具有微纳米尺寸级别的复杂精密机械产品的需要不断增长。

本书对执行器的新应用进行了全面的介绍，内容包括：介绍了压电执行器、形状记忆执行器、磁致伸缩执行器的机电一体化设计、控制、集成技术；检验了微纳米级别新兴执行器的特性和性能；评估了各种执行器技术的优点，勾画了今后的应用领域。

本书可供从事微纳器件设计制造领域的科研人员、工程师参考。

Copyright © 2005 Wiley

All Rights Reserved. This reprint published under license.

图书在版编目(CIP)数据

执行器技术：微机电方法：英文/（美）庞斯（Pons, J. L.）编著.
—影印版. —北京：科学出版社，2007
（微纳技术著作丛书（影印版））

ISBN 978-7-03-018258-6

I. 执… II. 庞… III. 执行器-英文 IV. TH86

中国版本图书馆 CIP 数据核字(2006)第 146677 号

责任编辑：王志欣 孙 芳/责任印制：安春生/封面设计：陈 敬

科 学 出 版 社 出 版

北京东黄城根北街 16 号

邮政编码：100717

<http://www.sciencep.com>

天时彩色印刷有限公司印刷

科学出版社发行 各地新华书店经销

*

2007 年 1 月第 一 版 开本：B5(720×1000)

2007 年 1 月第一次印刷 印张：18

印数：1—3 000 字数：455 000

定价：45.00 元

（如有印装质量问题，我社负责调换〈双青〉）

《微纳技术著作丛书》编委会

(按姓氏笔画排序)

王万军	教授	美国路易斯安娜大学
刘 明	教授	中国科学院微电子研究所
李昕欣	研究员	中国科学院上海微系统与 信息技术研究所
李家明	院士	清华大学/上海交通大学
周兆英	教授	清华大学
金国藩	院士	清华大学
唐一科	教授	重庆科技学院
彭练茅	教授	北京大学



序

科学出版社准备出版一套《微纳技术著作丛书》，包括原创作品和引进作品（影印或翻译）两种形式，并聘请专家组成编委会。这是一件大事，希望能坚持把它办好。

微纳米技术作为 21 世纪重要的一项技术，已成为国际科学界和工程技术界研究的热点。近年来，微米纳米技术进展迅速，已经发展成为一个包含机械、材料、电子、光学、化学、生物、基因工程、医学等基础学科的综合领域，而不仅仅属于任何单一的科学和技术门类。就其产品而言，也早已超越了人们广为熟悉的微型加速度传感器和纳米碳管等，呈现出向各个科学和技术领域全面渗透的趋势。

由于微纳米技术使得人们除了可以在同一基片上实现包括机械、流体、化学、生物、光学等器件外，也可以将信号处理和传输系统集成在同一基片上用以处理信息，决定计划，控制周围环境，从而大大提高最终产品的综合性能，实现高度智能化。在未来的航空航天、生物医学、环境监控、无线通信、汽车和交通、石油化工、能源、工农业、国家安全、食品和消费的各个领域都将有广泛应用，对国民经济、科学技术、社会发展与国家安全具有重要意义。今后的几十年里，随着微米纳米技术的迅速发展和向现代科学和技术的各个门类渗透，其对我们现代生活的各个方面带来的影响将是长期和深远的。从某种意义上来说，微米纳米技术的发展，可能改变人类的工作和生活方式，乃至基本概念，其潜在的影响有可能和以计算机技术为代表的微电子工业对世界的影响相提并论。

正是由于其诱人的应用前景和巨大的潜在市场，微米纳米技术目前已成为世界各国大力投资进行研究和发展的热点领域，其研究范围包括了材料、器件和系统，涉及的技术包含机理研究、设计分析、计算仿真、制造工艺、系统集成或组装、测控技术和应用研究等。随着微纳米技术的迅猛发展，近年来国外有大量这方面的专业书籍出版。

《微纳技术著作丛书》涵盖材料开发、系统设计、检测技术、集成技术、通信网络、传感系统、微加工技术等方面，它们都是本领域的研究热点。这套丛书的出版对促进我国微米纳米技术的发展将有很大的推动作用。

这套丛书中，原创作品收录的都是国内从事微纳技术的一线研究人员在本领域的研究成果与心得，具有很强的独立性、创造性和系统性。引进作品都是与国际知名的出版集团合作，经国内专家的甄别，挑选出能反映国外最新研究成果、对国内读者又有借鉴价值的作品，具有权威性、前瞻性和可读性。因为微纳米技

术是一个交叉学科领域，我们有意识的选择了一些由多人合写的专著。通常这类著作都是由相关领域的知名专家，各自在每一章节涵盖一个专题，既有进行综合性的论述，也有个人的具体独创性研究。这样的书籍，通常能帮助读者既获得某一领域的研究概况，又能从一个具体的应用专题中获得收益。

2007年初推出的第一批影印版图书，我和王万军教授进行了评读，此套丛书很实用，不少作者在该领域有很高的声望。我们建议致力于微米纳米技术的研究人员，包括研究生、技术人员，能够花些时间阅读。

总之，我们对科学出版社组织出版这套丛书的举措很赞赏，也希望他们能将这一工作认真、长期地做下去。同时，我们也希望国内的专家能够积极、踊跃地加盟，为我国微米纳米技术的推进做出贡献。

周兆英 王万军

2006年12月7日

Contents

1	Actuators in motion control systems: mechatronics	1
1.1	What is an actuator?	2
1.2	Transducing materials as a basis for actuator design	5
1.2.1	Energy domains and transduction phenomena	6
1.2.2	Transducer basics	8
1.3	The role of the actuator in a control system: sensing, processing and acting	11
1.3.1	Sensing	12
1.3.2	Processing	12
1.3.3	Actuation	13
1.3.4	Impedance matching	14
1.4	What is mechatronics? Principles and biomimesis	17
1.4.1	Principles	17
1.4.2	Mechatronics and biomimesis	19
1.5	Concomitant actuation and sensing: smart structures	23
1.6	Figures of merit of actuator technologies	27
1.6.1	Dynamic performance	28
1.6.2	Actuator behavior upon scaling	30
1.6.3	Suitability for the application	32
1.6.4	Static performance	32
1.6.5	Impact of environmental parameters	33
1.7	A classification of actuator technologies	33
1.7.1	Semiactive versus active actuators	33
1.7.2	Translational versus rotational actuators	34
1.7.3	Input energy domain	34
1.7.4	Soft versus hard actuators	36

1.8	Emerging versus traditional actuator technologies	36
1.9	Scope of the book: emerging actuators	38
1.10	Other actuator technologies	39
1.10.1	Electrostatic actuators	39
1.10.2	Thermal actuators	41
1.10.3	Magnetic shape memory actuators	42
2	Piezoelectric actuators	46
2.1	Piezoelectricity and piezoelectric materials	47
2.2	Constitutive equations of piezoelectric materials	49
2.3	Resonant piezoelectric actuators	51
2.3.1	Basics of resonant operation of piezoelectric loads	51
2.3.2	Rotational ultrasonic motors	57
2.3.3	Linear ultrasonic motors	65
2.4	Nonresonant piezoelectric actuators	67
2.4.1	Bimorph actuators	67
2.4.2	Stack piezoelectric actuators	69
2.4.3	Inchworm actuators	71
2.5	Control aspects of piezoelectric motors	72
2.5.1	Control circuits and resonant drivers	72
2.5.2	Control of nonresonant actuators	79
2.6	Figures of merit of piezoelectric actuators	81
2.6.1	Operational characteristics	81
2.6.2	Scaling of piezoelectric actuators	85
2.7	Applications	89
2.7.1	Applications of resonant piezoelectric actuators	89
2.7.2	Applications of nonresonant piezoelectric actuators	91
3	Shape Memory Actuators (SMAs)	101
3.1	Shape memory alloys	102
3.1.1	The shape memory effect	103
3.1.2	Pseudoelasticity in SMAs	108
3.2	Design of shape memory actuators	110
3.2.1	Design concepts for actuation with SMAs	111
3.2.2	Material considerations	117
3.2.3	Thermal considerations	119
3.3	Control of SMAs	120
3.3.1	Electrical heating	120
3.3.2	Concomitant sensing and actuation with SMAs	121
3.3.3	Integration in control loops	124
3.4	Figures of merit of shape memory actuators	130
3.4.1	Operational ranges	130
3.4.2	Scaling laws for SMA actuators	132
3.5	Applications	133

4	Electroactive polymer actuators (EAPs)	145
4.1	Principles	146
4.1.1	Wet EAP actuators	146
4.1.2	Dry EAP actuators	155
4.2	Design issues	159
4.3	Control of EAPs	160
4.4	Figures of merit of EAPs	163
4.4.1	Operational characteristics	163
4.4.2	Scaling laws for EAPs	165
4.5	Applications	166
5	Magnetostrictive actuators (MSs)	171
5.1	Principles of magnetostriction	172
5.1.1	Historical perspective	172
5.1.2	Basics of magnetic properties of materials	173
5.1.3	Magnetostriction: constitutive equations	175
5.2	Magnetostrictive materials: giant magnetostriction	178
5.2.1	Positive versus negative magnetostriction: effect of the load	178
5.2.2	ΔY -Effect in magnetostrictive materials	180
5.3	Design of magnetostrictive actuators	181
5.3.1	Design for improved stroke	183
5.3.2	Design for linearized, push-pull operation	183
5.3.3	Design of electric and magnetic circuits	184
5.3.4	Design for selected resonance characteristics	185
5.4	Control of magnetostrictive actuators: vibration absorption	185
5.4.1	Active vibration suppression	186
5.4.2	Smart actuators and smart structures	191
5.4.3	Combined sensing and actuation	195
5.5	Figures of merit of MS actuators	197
5.5.1	Operational range	198
5.5.2	Scaling laws for magnetostriction	199
5.6	Applications	200
6	Electro- and magnetorheological actuators (ERFs, MRFs)	205
6.1	Active rheology: transducing materials	206
6.1.1	Basics of rheology	206
6.1.2	Field-responsive fluids	209
6.1.3	Electro- and magnetorheology	210
6.2	Mechatronic design concepts	213
6.2.1	Shear, flow and squeeze modes	213
6.2.2	Device dimensions according to specifications	216
6.2.3	Driving electronics for ER and MR devices	217
6.2.4	Design of magnetic circuits in MR devices	221

6.3	Control of ERF and MRF	223
6.3.1	Sky-hook vibration isolation	225
6.3.2	Relative vibration isolation	229
6.4	Figures of merit of ER and MR devices	229
6.4.1	Material aspects	229
6.4.2	Size and weight of ER and MR devices	230
6.4.3	Available dissipative force and power	230
6.4.4	Scaling of active rheology concepts	232
6.5	Applications	235
7	Summary, conclusions and outlook	244
7.1	Brief summary	244
7.1.1	Piezoelectric actuators	247
7.1.2	Shape memory alloy actuators	247
7.1.3	Electroactive polymer actuators	248
7.1.4	Magnetostrictive actuators	249
7.1.5	Electro- and Magnetorheological fluid actuators	249
7.1.6	Example applications: case studies	250
7.2	Comparative position of emerging actuators	252
7.2.1	Comparative analysis in terms of force	252
7.2.2	Comparative analysis in terms of force density	253
7.2.3	Comparative analysis in terms of stroke	254
7.2.4	Comparative analysis in terms of work density per cycle	255
7.2.5	Comparative analysis in terms of power density	256
7.2.6	Comparative analysis in terms of bandwidth	257
7.2.7	Relative position in the static and dynamic plane	258
7.2.8	Comparison in terms of scaling trends	261
7.2.9	Concluding remarks	262
7.3	Research trends and application trends	263
7.3.1	Piezoelectric actuators	264
7.3.2	Shape memory alloy actuators	265
7.3.3	Electroactive polymer actuators	266
7.3.4	Magnetostrictive actuators	267
7.3.5	Electro- and Magnetorheological fluid actuators	268
	Bibliography	272
	Index	275

Actuators in motion control systems: mechatronics

Actuators are irreplaceable constituents of mechatronic motion control systems. Moreover, they are true mechatronic systems: that is, concurrent engineering is required to fully exploit their potential as actuators.

This chapter analyzes the actuator as a device included in motion control systems. It introduces the intimate relationship between transducers, sensors and actuators, and discusses the implications of sharing these functions on the same component.

It also discusses the role of the actuator as a device establishing an energy flow between the electrical and the mechanical domain, and it introduces a set of relevant performance criteria as a means for analyzing the performance of actuators. These criteria include both static and dynamic considerations, and also the performance of the actuator technology upon scaling.

Actuators are classified into active and semiactive actuators according to the direction in which energy flows through the actuator. Active technologies (Piezoelectric, SMA, EAP and magnetostrictive actuators) are then discussed in Chapters 2 through 5, and semiactive technologies (ER and MR actuators) in Chapter 6.

Finally, after explaining the distinction between emerging and traditional actuators, this chapter concludes with an analysis of other actuator technologies (electrostatic, thermal and magnetic shape memory actuators) not specifically dealt with in separate chapters.

1.1 What is an actuator?

The mechanical state of a system can be defined in terms of the energy level it has at a given moment. One possible way of altering the mechanical state of a system is through an effective exchange of energy with its surroundings. This exchange of energy can be accomplished either by passive mechanisms, for example, the typical decaying energy mechanism through friction, or by active interaction with other systems. An actuator is a device that modifies the mechanical state of a system to which it is coupled.

Actuators convert some form of input energy (typically electrical energy) into mechanical energy. The final goal of this exchange of energy may be either to effectively dissipate the net mechanical energy of the system, for example, like a decaying passive frictional mechanism, or to increase the energy level of the system.

An actuator can be seen as a system that establishes a flow of energy between an input (electrical) port and an output (mechanical) port. The actuator is transducing some sort of input power into mechanical power. The power exchange both at the input and output ports will be completely defined by two conjugate variables, namely, an effort (force, torque, voltage etc.) and a flow (velocity, angular rate, current, etc.). Eventually, some input power will be dissipated into heat. See Figure 1.1 for a schematic representation of the actuator.

The ratio of the flow to the effort (conjugate variables) is referred to as *impedance*. If an electrical input port is considered, the voltage and the current drawn will completely define the power flowing in the actuator, and the ratio is the familiar electrical impedance. By analogy to the electrical case, at the mechanical port, the ratio of flow (velocity or angular rate) to effort (force or torque) is referred to as *mechanical impedance*, and both variables will define the power coming out of the actuator.

The concept of power exchange at the input and output ports of an actuator gives rise to a wider definition of actuators as devices whose input and output ports exhibit different impedances. In general, neither the input electrical impedance of an actuator will match that of the controller nor the output mechanical impedance will match that of the driven plant. This lack of match between input and output

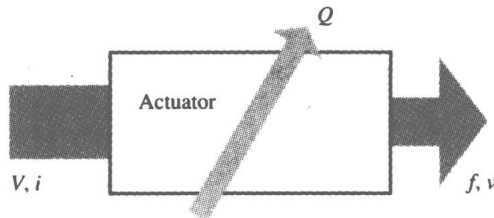


Figure 1.1 Actuator concept: energy flows from the input to the output port. Eventually, some energy is dissipated (undesired losses).

impedances means that impedance adaptation is required both at the input and output ports. The issue of impedance matching will be dealt with in more detail in Section 1.3.

Actuators are most often found in *motion control systems*, (MCS). In these systems, the ultimate objective is to drive the plant along some reference trajectory. The role of the actuator in such a system is to establish the flow of power by means of some control actions (inputs) in response to process models or sensory data so that the desired trajectory is effectively accomplished.

The dynamic interaction between the actuators and the controlled system can be defined according to the magnitude of the energy being exchanged, $dW = F \cdot dX$, Hogan (1985a). In some particular situations, the instantaneous energy exchange can be ignored. This is the case where the force or the displacement is negligible. On the one hand, if the force is zero ($F = 0$), the system can be considered position controlled. On the other hand, wherever the displacement is zero ($dX = 0$), the system is force controlled.

In general, the interaction will take place with a finite, nonzero instantaneous energy exchange ($dW \neq 0$). In such a case, the motion control system will be able to impose the effort (force, torque), the flow (velocity, angular rate), or the ratio between them (the impedance), but not both simultaneously.

Depending on the sign of the admissible instantaneous work exchange, dW , actuators can be classified as:

1. *Semiactive actuators*: the work exchange can only be negative, $dW \leq 0$. In practice, this means that semiactive actuators can only dissipate energy as a consequence of mechanical interaction with the controlled system. These actuators are dealt with in Chapter 6.
2. *Active actuators*: the work exchange can take any positive or negative value, $dW \leq 0$. For practical purposes, this means that active actuators can either increase or decrease the energy level of the controlled system.

The ultimate constituent of an actuator is the transducer. A transducer has been defined (Middlehoek and Hoogerwerf (1985)) as *a device, which transforms nonelectrical energy into electrical energy and vice versa*. This definition of a transducer emphasizes the fact that most actuators (transducers) are driven by logic elements in which the information flow is electronically established. As such, transducers ultimately transform to and from electrical energy.

Transducers have also been defined (Rosenberg and Karnopp (1983)) as *devices, which transform energy from one domain into another*. Rosenberg's definition of a transducer is broader than the previous one since it does not restrict transduction to or from the electrical domain. Finally, the broadest definition of a transducer makes a distinction between different types of energy within a single domain (differentiating between rotational and translational mechanical energy). It states (Busch-Vishniac (1998)) that a transducer is *a device, which transforms energy from one type to another, even if both energy types are in the same domain*.

A transducer can be used to monitor the status of a parameter in a system, or it can be used to define the status of such a parameter. It is the former use of transducers that produces the *concept of sensors*. A sensor is thus a transducer, which is able to monitor the status of a system (ideally) without influencing it.

On the other hand, an actuator can be defined as a transducing device, which is able to impose a system status (ideally) without being influenced by the load imposed on it.

The transduction process can be established between any two energy domains (see second definition of transducers) or even between different energy types within the same domain (see third definition). Whenever a transducer is used to impose a status on a system (actuator concept), such wide definitions of transducers would include actuators capable of establishing energy flow between any two energy domains. Throughout this book, the first definition of transducers is used and is restricted to output mechanical energy.

A transducer might establish energy flow between nonelectrical input energy domains and output mechanical energy – see the case of a thermally actuated shape memory alloy (SMA) transducer. For practical purposes, it is always possible to include any subsystem in charge of electrically driving the transducer in the actuator system. This applies, for instance, to electrically heating the SMA transducer by means of a Joule effect (delivering heat through resistance heating). The actuator system as a whole establishes a flow of energy between the electrical domain and the mechanical domain (see Figure 1.2).

The use of electrical energy at the input port of actuators has clear advantages:

1. *Compatible energy domains.* Most motion control systems (in which actuators are usually included) are controlled electronically; thus, the output energy domain of the control part is already in the same energy domain as the input actuator port.
2. *Fast operation of electric devices.* Electronic and electric devices are characterized by fast operation, in most cases much faster than the intrinsic time constants of the actuator. This improves the controllability of actuators.
3. *Availability of components.* The electronic components used in the control and conditioning system are well-known and readily available.

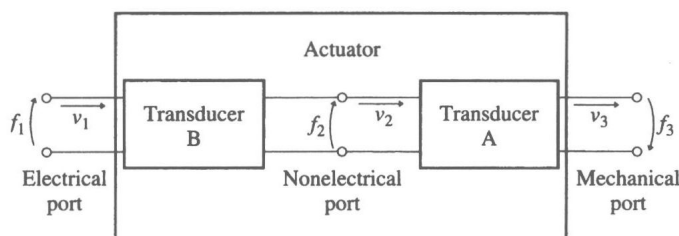


Figure 1.2 Actuator concept as a two-port transducer: input electrical port and output mechanical port.