

传感材料与传感技术丛书

Sensing Material and Sensing Technology Series


# BIOMEDICAL SENSORS

EDITED BY **DERIC P. JONES**

影印版

## 生物医学传感器

上册

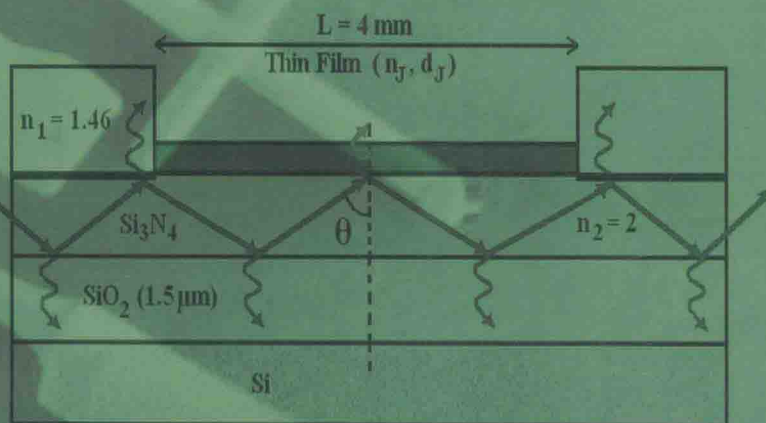

哈尔滨工业大学出版社  
HARBIN INSTITUTE OF TECHNOLOGY PRESS

# BIOMEDICAL SENSORS

EDITED BY **DERIC P. JONES**

影印版

## 生物医学传感器

上册



哈爾濱工業大學出版社  
HARBIN INSTITUTE OF TECHNOLOGY PRESS

# 黑版贸审字08-2014-075号

Deric P. Jones  
Biomedical Sensors  
9781606500569  
Copyright © 2010 by Momentum Press, LLC  
All rights reserved.


Originally published by Momentum Press, LLC  
English reprint rights arranged with Momentum Press, LLC through McGraw-Hill Education ( Asia )

**This edition is authorized for sale in the People's Republic of China only, excluding Hong Kong, Macao SAR and Taiwan.**

本书封面贴有McGraw-Hill Education公司防伪标签，无标签者不得销售。  
版权所有，侵权必究。

## 图书在版编目 ( CIP ) 数据

生物学传感器 = Biomedical Sensors. 上册: 英文 / (英) 琼斯 ( Jones, D. P. ) 主编. —影印本.  
—哈尔滨: 哈尔滨工业大学出版社, 2015.1  
( 传感材料与传感技术丛书 )  
ISBN 978-7-5603-4909-1  
I. ①生… II. ①琼… III. ①生物传感器-研究-英文 IV. ①TP212.3  
中国版本图书馆CIP数据核字 ( 2014 ) 第242676号



责任编辑 许雅莹 杨 桦 张秀华  
出版发行 哈尔滨工业大学出版社  
社 址 哈尔滨市南岗区复华四道街10号 邮编 150006  
传 真 0451-86414749  
网 址 <http://hitpress.hit.edu.cn>  
印 刷 哈尔滨市石桥印务有限公司  
开 本 787mm × 960mm 1/16 印张 17.25  
版 次 2015年1月第1版 2015年1月第1次印刷  
书 号 ISBN 978-7-5603-4909-1  
定 价 90.00元

( 如因印刷质量问题影响阅读, 我社负责调换 )



## 影印版说明

1. 《传感材料与传感技术丛书》中第一个影印系列 MOMENTUM PRESS 的 *Chemical Sensors: Fundamentals of Sensing Materials & Comprehensive Sensor Technologies* (6 卷, 影印为 10 册) 2013 年出版后, 受到了专家学者的一致好评。为了满足广大读者进一步的教学和科研需要, 本次影印其 *Biomedical Sensors* (1 卷, 分为上下册影印), 本书是上册 (1 ~ 4 章内容)。
2. 原书的文前介绍、索引等内容在上下册中均完整呈现。

材料科学与工程图书工作室

联系电话 0451-86412421

0451-86414559

邮 箱 yh\_bj@aliyun.com

xuyaying81823@gmail.com

zhxh6414559@aliyun.com

# SENSORS TECHNOLOGY SERIES

## EDITOR-IN-CHIEF'S PREFACE

In recent years the interface between the life sciences and the physical sciences has become inhabited by researchers and practitioners with knowledge and expertise in both areas. This is a very welcome trend because traditionally it has been difficult for the physical scientist to appreciate the needs of the life scientist or medical practitioner, and equally difficult for the biomedical community to ascertain what might be possible in physical terms. Happily, this gulf is rapidly being filled. In particular, the development of instruments based on physical, chemical, and biological principles has burgeoned. Inevitably, as with all things, there are downsides, the predominant one in the medical context being related to cost, which for some installations can represent several millions of dollars.

However, rather more modest analytical instruments require sensors of various types as well, and this volume presents a selection of these, complete with detailed background material on the scientific and technical principles relevant to each. Such multifaceted work represents a major ongoing international endeavor and, as such, merits more comprehensive bibliographical material than do some of the more mature topics in other volumes of the series. The descriptive material and relevant bibliographies in the present compilation have been provided by an author list of leading scientists in their various specialties assembled by the volume editor, Deric Jones, who has drawn upon his experience as Head of Medical Electronics & Physics at the Medical School of St. Bartholomew's Hospital in the University of London. These authors have in turn drawn upon their own experiences to present authoritative reviews of sensors ranging from basic devices for measuring temperature and flow, through both ionizing and nonionizing radiation, to transducers for ultrasound, chemical, and biological sensing.

J. Watson  
Editor-in-Chief  
July 2010

### ABOUT THE EDITOR-IN-CHIEF

**Joseph Watson** is an electrical engineering graduate of the University of Nottingham, England, and the Massachusetts Institute of Technology. He has published books and papers in various areas

including electronic circuit design, nucleonics, biomedical electronics, and gas sensors and has been a visiting professor at the University of Calgary, Canada, and the University of California, Davis and Santa Barbara. Dr. Watson has held various consultancies with firms in the United States, Canada, and Japan and since retirement from the University of Wales, Swansea, has continued as chairman of the UK-based Gas Analysis and Sensing Group and as editor-in-chief for the Sensors Technology Series for Momentum Press.

# PREFACE

## BACKGROUND

In 400 B.C. the Greek physician Hippocrates placed his hand on a patient's forehead and used the sense of touch to estimate body temperature. The five human senses were effectively the only sensors available to the "father of medicine" and his descendants until the seventeenth century when the first objective biomedical sensor in the form of a crude thermometer was devised. However, it was only toward the end of the nineteenth century that developments in science made possible significant advances in biomedical sensor technology. The twentieth century and the modern era of biomedical technology may have been ushered in when, in November 1895, Wilhelm Röntgen astonished the medical profession and the world with an X-ray image of his wife's hand that he obtained using photographic film as a sensor. Twenty-four centuries after Hippocrates, sensors now extend the range of human senses to make possible diagnostic and therapeutic techniques that the ancient Greeks could never have envisioned. Almost all modern biomedical measurement and imaging systems depend upon sensors of one kind or another, although in many cases they are not immediately evident, often being hidden deep within the medical instrument. Today it is quite common for there to be a number of sensors embedded within the same medical device; for example, the ubiquitous hospital blood gas analyzer will routinely incorporate more than half a dozen sensors, one for each gas and substance to be analyzed.

## WHAT IS A SENSOR?

The broadest and simplest definition of a *sensor* is "anything that responds to an input of interest." However, a general-purpose dictionary definition is "a device that detects or measures some condition or property and records, indicates, or otherwise responds to the information received." Although this is an excellent everyday definition, for biomedical engineering and medical physics purposes it is too imprecise. A device that merely "detects some condition or property," presumably by registering the presence or absence of a physical quantity with a simple yes-or-no response, would be called a "detector," not a sensor. Although detectors have important uses in medicine, especially as the basis of alarms, they are not generally regarded as sensors. For practical biomedical applications a *sensor* is better defined as "*a device that responds to a physical input of interest with a recordable functionally related output that is usually electrical or optical.*" In a biomedical context, of course, the term *physical input* is taken to include chemical and biochemical quantities and concentrations. A device with an electrical output satisfies the "records or indicates" criterion in the general dictionary definition because electrical signals can be amplified and processed readily to give a display on a monitor, an output on a chart



recorder, or an input to a digital data storage system. Sometimes a sensor's optical output signals *are* the required output—in imaging, for example—but any optical output signal can usually be converted fairly easily into an electrical signal by means of a photosensor.

It is the requirement that the output be *functionally related* to the physical quantity of the input that distinguishes a sensor from a yes–no detector. The most desirable functional relationship is a simple linear one, whereby a doubling of the input physical quantity results in a doubling of the electrical or optical output. Such a relationship usually leads to a relatively simple calibration procedure. Unfortunately, many common and widely utilized sensors do not exhibit such linear behavior—a thermistor for temperature measurement, for example—but nevertheless they can still be made into useful practical devices by using suitable, if more elaborate, calibration methods (see Chapter 1).

The terms *sensor* and *transducer* are often used synonymously, although there are times when this may not be appropriate. It seems to be generally accepted in science and technology that a working definition of a *transducer* is “a device that converts one form of energy into another, the latter often being electrical.” A sensor usually meets this criterion and can therefore also be described as a transducer. Even sensors of biochemical quantities or concentrations are somehow converting chemical energy into electrical or optical energy. However, a transducer, unlike a sensor, does not necessarily have an electrical or optical output that is intended to be recordable and also functionally related to its input. An example of this is in ultrasonic imaging (see Chapter 6), where the same probe has two quite separate functions: (1) to generate the ultrasonic waves that enter the human body and (2) to respond to, or sense, the ultrasonic echoes from tissue interfaces within the body. In the first case the probe is acting as a *transducer*, converting a short pulse of electrical energy into ultrasonic mechanical energy; in the second case the probe acts as a *sensor*, converting the incident ultrasonic mechanical energy in the echo into an electrical signal that is processed to give the recorded image. On the basis of this distinction, transducers can sometimes be regarded as components of sensors. For example, a diaphragm in a microphone or a pressure sensor converts sound or pressure energy into strain energy in the diaphragm; a second transducer stage is required to convert this strain energy into recordable electrical energy in order to make a complete sound or pressure sensor. The use of the word *sensor* allows a distinction to be made between a device that gives a measurable recordable output that is functionally related to changes in a physical quantity at its input, and a device for converting one form of energy into another—a *transducer*, which may not necessarily have the properties of a sensor.

## SCOPE OF THIS VOLUME

This volume includes a wide range of topics in biomedical engineering and medical physics. However, the subject of biomedical sensors has grown very rapidly in the last three decades and now encompasses such a huge field that even a “comprehensive” treatment of this sensor technology must, of necessity, be selective. The choice of topics was influenced principally by their clinical relevance and also to some extent by the contents of a long-established graduate-taught master's course at the Medical School of St. Bartholomew's Hospital, London, UK, that the editor organized. It was decided to include sensors associated with the measurement of temperature, fluid flow, radiation (including ionizing radiation, non-ionizing radiation, and ultrasound), and also chemical and biochemical sensors, including biosensors. Those sensors associated with purely mechanical physical quantities have not been treated as primary subjects in this volume. Hence, sensors for the measurement of position, force, pressure, and acceleration, which are all of particular importance in the field of biomechanics, have been left for the present.

The aim here is to emphasize the technological principles and the practical applications of biomedical sensors rather than the theoretical concepts. The treatments in the chapters usually include details of the technical principles of the sensor together with those of any associated peripheral devices essential for registering the response of the sensor. Examples of the practical applications of the systems associated with the sensors have been included, but detailed discussions of the operations of complete systems have been avoided. Generally the volume concentrates on sensors that are currently used in practice or are likely to be used in the near future. Research laboratory techniques that are speculative or a long way from being practically viable in a clinical context have not been included. Some chapters, where appropriate, contain critical comparisons of manufacturers' sensor data.

## READERSHIP

This volume is intended to provide a good initial introduction and reference source for biomedical engineers and medical physicists who need to become acquainted with new fields and topics. It should act as a reliable guide to the bewildering array of more specialized literature and texts on the subject. The contents should be accessible to a broad range of professionals in biomedicine, including practicing experienced biomedical engineers, medical physicists, clinical technologists, and clinicians working in a hospital or other health care environment.

Academics in higher education institutions will find the book an invaluable resource to further their scholarship and advance research projects on sensors and other medical devices. In addition, students should benefit from a well-written, advanced textbook suitable for those final-year undergraduate, postgraduate, and research students aiming to pursue a career in the field of medical physics or biomedical engineering.

Engineers and applied physicists working for health care providers or for the pharmaceutical and medical instrumentation industries will find in this volume a rich source of relevant information. It also contains essential tools to help solve practical problems encountered in both routine applications and the challenges of advanced development work.

## THE CONTENTS

The majority of the distinguished authors who have contributed to *Biomedical Sensors* have had decades of practical experience in biomedical engineering and medical physics. Moreover, the authors have well-established international reputations and many are world-renowned experts in their fields.

The chapters are organized according to the measurand being considered, that is, the physical quantity being sensed and measured (e.g., temperature, ionizing radiation, or chemical concentration).

The first chapter deals with the measurement of the temperature of the human body. Temperature has been used by physicians since the earliest times for the diagnosis and monitoring of disease. Given its fundamental importance, it is surprising that there have been so few comprehensive reviews of the subject. It is almost as if it is taken for granted that anyone can measure body temperature accurately if required. This chapter shows that this is not necessarily true, particularly as there are now so many possible techniques, some intended for specific applications, that the choice of an appropriate method to give accurate reliable results is often not easy. Chapter 1 provides a timely overview of modern clinical thermometry and gives a critical assessment of the accuracy and applicability of the various methods available to the physician, surgeon, parents, and others for whom assessing the temperature of the human body is of vital importance.

Chapter 2 is primarily concerned with the most important liquid in the body, which is, of course, blood. The measurement of blood velocity and blood flow in arteries and veins is a major activity for large numbers of biomedical engineers and medical physicists. The quantitative estimation of blood flow in the limbs and in various organs is of great value in many diagnostic investigations, and advances in the subject have made significant contributions to cardiology. The chapter provides a comprehensive review of the traditional flow measurement techniques, such as indicator dilution methods, plethysmography, and ultrasound for arteries and veins. It also covers more modern techniques such as ultrasonic Doppler methods in cardiology and functional magnetic resonance imaging (MRI) in the brain. More advanced topics, such as the use of contrast agents in ultrasonic imaging and MRI in the quantitative analysis of dynamic processes are also discussed. The chapter ends with a brief overview of the measurement of flow in other fluids, including urine, saliva, tears, and gastric acids.

Chapter 3, on respiratory flow sensors, considers another fluid, namely, the gas that flows out of and into the human lung. It requires the use of quite specialized techniques that are different from those outlined in Chapter 2 for liquids. Every large hospital has a pulmonary function laboratory, because respiratory disease is one of the most significant public health burdens in developed countries. Indeed, respiratory diseases account for about one-third of all deaths in the United States. It might be thought that the measurement of airflow is relatively simple, but there are many technical challenges associated with the application of flow sensors in pulmonary medicine. These are dealt with in an exemplary manner in this chapter.

Chapter 4 deals comprehensively with ionizing radiation sensors in medicine, a field that is primarily the preserve of medical physicists, but also engages numerous engineers in the design, development, and maintenance of medical X-ray equipment. The importance of ionizing radiation can be judged from the fact that it is likely that two-thirds or more of all the clinical engineers and scientists working in hospital environments are employed in X-ray or other ionizing radiation-related activities in diagnostic imaging, radiotherapy, nuclear medicine, and radiation protection. The chapter gives an overview of the basic requirements for sensing ionizing radiation, the interactions with materials, and the criteria for assessing the performance of the sensors. It goes on to treat sensors for dosimetry ranging from semiconductors and radiographic film to diamond and outlines their advantages and disadvantages. Next, sensors for imaging are reviewed, including radiographic film and flat-panel detectors, while the characteristics of various scintillator materials for sensors are also outlined. Specific applications and advances in imaging in computed tomography (CT), mammography, single photon emission computed tomography (SPECT), and positron emission tomography (PET) are also covered. The final part deals with sensors for ionizing radiation spectroscopy and concludes with examples of detector selection in a series of case studies.

Chapter 5 deals with nonionizing electromagnetic radiation and radiometric and photometric measurements. Lasers have played an important role in biomedicine for more than three decades, finding significant applications in ophthalmology, surgery, and photodynamic therapy for cancer treatment. In Europe, recent directives on the use of artificial optical radiation in the workplace are being implemented, while in the United States, the Food and Drug Administration (FDA) Center for Devices and Radiological Health produces similar guidance notes. There is also an increasing use of ultraviolet (UV) light therapy for the treatment of eczema and hyperbilirubinemia in newborn babies, up to 60% of whom may suffer from this condition. This authoritative chapter is timely, as there is a growing need to understand the challenges faced in obtaining accurate dosimetry measurements with nonionizing radiation, particularly when it is required to make comparisons with other treatment

centers. There is an explanation of radiometric and photometric terms and a review of measurement sensors. Radiometric sensors for the measurement of UV irradiance in phototherapy treatment and their application are discussed. The chapter ends with a section on the objective measurement of solar radiation at the earth's surface and, in particular, the measurement of sun-burning UV radiation, a topic of some importance with the increasing incidence of skin cancer worldwide.

Ultrasonic imaging was originally developed in the 1960s to replace potentially damaging X-rays in fetal imaging. It now finds applications not only in obstetrics, but in a wide range of disciplines from cardiology to ophthalmology and gastroenterology. Chapter 6 reviews in depth the probes that generate and sense the ultrasonic signals that enter the human body in ultrasonic imaging. It complements the sections on ultrasonic flow measurements in Chapter 2. The principles of operation of the probes are outlined and various practical electrical and acoustical models of the sensors are developed. The construction of single-element probes and multielement arrays is considered and the characteristics of various modern piezoelectric materials used to make the probes are compared. Focusing principles and performance criteria are established, followed by some examples of the clinical applications of phased and linear arrays. Finally, advanced topics such as multimode operation and the construction of two-dimensional arrays are considered.

The measurement of the concentrations of the various chemical components of blood is of great importance in the diagnosis and treatment of disease. Blood gas analyzers are among the most significant of medical instruments and operate 24 hours a day, every day, in all major hospitals. Gas sensors also perform a vital role in anesthesia, measuring accurately the concentrations of the anesthetic agents. Chapter 7 is a comprehensive overview of the principles of the sensors used to measure these and other chemical compounds. Electrochemical sensors for the measurement of pH,  $pO_2$  (the partial pressure of oxygen), and  $pCO_2$  (the partial pressure of carbon dioxide) in blood both noninvasively and invasively are described. Advanced miniature microelectromechanical systems (MEMS) for sensing blood  $pO_2$  and  $pCO_2$  and similar ion-selective field effect transistors (ISFETs) for pH are covered. Optical fiber chemical sensors for pH,  $pCO_2$ , and invasive and noninvasive blood oximetry are reviewed. The principles of gas phase sensors for the real-time measurement of the concentrations of oxygen, carbon dioxide, and anesthetic gases in respiratory medicine and anesthesia are outlined. There is also a review of a variety of methods for blood glucose sensing from optical and electrochemical sensors to biosensors. Some of the latter part of this section complements the following chapter on biosensors. Finally, a highly sensitive acoustic chemical sensor is described that makes use of a quartz crystal microbalance coated with zeolite to detect acetone in the breath for the diagnosis of diabetes and for other clinical analyses.

Biosensors have evolved from the marriage of two disciplines: optoelectronics technology, exemplified by microcircuits and optical fibers, and molecular biology. They are among the most exciting and challenging developments in analytical devices and have the potential to make continuous measurements of blood chemistry at the bedside or, by means of a chip on a catheter, in a patient's vein. They incorporate a biological recognition element that interacts with a target molecule to provide a highly selective sensor. Drugs, metabolites, proteins, and nucleic acids are all targets for biosensors. Chapter 8 introduces and reviews enzyme-based biosensors—in particular, those based on glucose oxidase, used to estimate blood glucose, and urease for the estimation of blood urea. Enzyme immobilization techniques are described, from physical entrapment and chemical immobilization to surface adsorption. Optical biosensors, including optical fibers, surface plasmon resonance, and attenuated total reflection types are covered. Modified electrochemical biosensors that can be used for home glucose monitoring are also described. Microfabricated enzyme-linked field effect transistors (ENFETs),

whole cell biosensors, and nanobiosensors are discussed. Biosensors have enormous potential, but there are also formidable challenges for practical utilization, which are outlined clearly in this chapter. The problems include robustness and lifetime and operational stability, but these are being resolved using a variety of sensors, formatting techniques, and MEMS.

Medical thermography is the ultimate noninvasive investigative technique in which clinically relevant information is obtained without any contact with the patient and without the use of penetrating radiation. It is the subject of the final chapter and uses infrared (IR) radiation that is passively emitted by the human body. Medical thermography is a fine example of “swords into plowshares” technology transfer, because most of the significant advances in the challenging field of IR imaging have been made for military purposes. Thermography is unique in providing quantitative information on inflammatory processes (e.g., in rheumatic diseases), and modern cameras are even capable of detecting infection in passengers at airport gates. In addition, skin diseases, nerve injuries, industrial and sports injuries, and disruptions to the peripheral circulation have all been investigated using IR imaging. This chapter complements Chapter 5, in that it describes a practical application of IR radiometry. It begins with an historical overview of IR detection and imaging and the development of early thermographic cameras. The IR spectrum and its subdivisions and the laws governing the emission of IR radiation are then described. Next, IR camera characteristics and the measurement of IR radiation using IR thermometers and thermal imagers are reviewed, followed by an outline of the development of modern focal-plane imaging arrays. Finally, the characteristics of a variety of sensors, from miniature bolometers to photon detectors, are described and figures of merit for assessing thermal camera performance are discussed.

The design, manufacture, distribution, and maintenance of sensors and the biomedical systems that depend on them are of immense and growing commercial significance. Multimillion-dollar companies, such as the biomedical divisions of General Electric, Philips, and Siemens, together with scores of other smaller enterprises, all base their prosperity on sensors, since virtually all their biomedical products depend critically on the reliable functioning of sensors of one kind or another.

Advanced biomedical sensors represent a commendable application of cutting-edge technology for the benefit of humanity. The practice of modern medicine would be impossible without them. The authors of this volume have communicated not only their consummate expertise, but also their enthusiasm for the subject. Readers will find here a rich source of practical knowledge and, it is hoped, the inspiration to make their own contributions to this rapidly expanding and important field.

## ACKNOWLEDGMENTS

It is a pleasure to acknowledge the encouragement of Stuart J. Meldrum of the Norfolk and Norwich University Hospital, United Kingdom, and Michael R. Neuman of Michigan Technological University in the initial stages of this project. I am grateful to Stuart Meldrum for reading and providing invaluable comments on the manuscript of Chapter 3. I should also like to express my gratitude to all the distinguished authors who have interrupted their busy schedules to contribute to this volume. Without them it would not exist. The original concept for the “Comprehensive Sensor Technology” series came from Joe Watson, the series editor. His steadfast enthusiasm, determination, and tenacity have

overcome many obstacles to ensure that the series is being published. I am deeply indebted to him for his sound advice, for his unfailing support, and for much more. Finally, I would like to thank my wife, Jennifer, for her forbearance and patience.

Deric P. Jones  
Editor  
Biomedical Engineering  
School of Engineering & Mathematical Sciences  
City University  
Northampton Square, London  
July 14, 2010

## ABOUT THE EDITOR



**Professor Deric Powell Jones** BSc DIC PhD was born in Monmouthshire, South Wales, and received the degrees of BSc in physics and PhD in the superconductivity of alloys from Imperial College, London. He worked as a medical physicist at St. Bartholomew's Hospital and then as a lecturer at the Medical School. During more than twenty-five years spent at St. Bartholomew's he became a reader in the University of London and head of Medical Electronics and Physics in the Medical School. His research interests include the application of opto-electronic techniques in anesthesia and surgery and also the development of new techniques for physiological measurements in respiration and ophthalmology. He is a fellow of the UK Institute of Physics and of the UK Institute of Physics and Engineering in Medicine and a chartered engineer and a senior member of the Institute of Electrical and Electronics Engineers. Professor Jones is currently affiliated to the Biomedical Engineering Department at City University, London.



# CONTENTS

|   |  |     |
|---|--|-----|
|   | Sensors Technology Series Editor-in-Chief's Preface  | vii |
|   | Preface  | ix  |
| 1 | Biomedical Sensors: Temperature Sensor Technology<br><i>P. A. Kyriacou</i>                                       | 1   |
| 2 | Flow Sensors for Liquids<br><i>M. Mischi and J. A. Blom</i>  | 39  |
| 3 | Flow Sensors for Respiratory Gases<br><i>G. Kim Prisk</i>  | 107 |
| 4 | Biomedical Sensors of Ionizing Radiation<br><i>Robert Speller, Alessandro Olivo, Silvia Pani, and Gary Royle</i> | 129 |
|   | INDEX  | 443 |



