

An Introduction to

Aircraft Structural Analysis

T. H. G. Megson



An Introduction to Aircraft Structural Analysis

T. H. G. Megson



AMSTERDAM • BOSTON • HEIDELBERG • LONDON
NEW YORK • OXFORD • PARIS • SAN DIEGO
SAN FRANCISCO • SINGAPORE • SYDNEY • TOKYO
Butterworth-Heinemann is an imprint of Elsevier



Butterworth-Heinemann is an imprint of Elsevier
30 Corporate Drive, Suite 400
Burlington, MA 01803, USA

The Boulevard, Langford Lane
Kidlington, Oxford, OX5 1GB, UK

Copyright © 2010, T. H. G. Megson. Published by Elsevier Ltd. All rights reserved.

The right of T. H. G. Megson to be identified as the author of this work has been asserted in accordance with the Copyright, Designs and Patents Act 1988.

No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or any information storage and retrieval system, without permission in writing from the publisher. Details on how to seek permission, further information about the Publisher's permissions policies and our arrangements with organizations such as the Copyright Clearance Center and the Copyright Licensing Agency, can be found at our Web site: www.elsevier.com/permissions.

This book and the individual contributions contained in it are protected under copyright by the Publisher (other than as may be noted herein).

Notices

Knowledge and best practice in this field are constantly changing. As new research and experience broaden our understanding, changes in research methods, professional practices, or medical treatment may become necessary.

Practitioners and researchers must always rely on their own experience and knowledge in evaluating and using any information, methods, compounds, or experiments described herein. In using such information or methods, they should be mindful of their own safety and the safety of others, including parties for whom they have a professional responsibility.

To the fullest extent of the law, neither the Publisher nor the authors, contributors, or editors assume any liability for any injury and/or damage to persons or property as a matter of products liability, negligence or otherwise, or from any use or operation of any methods, products, instructions, or ideas contained in the material herein.

British Library Cataloguing in Publication Data

A catalogue record for this book is available from the British Library.

Library of Congress Cataloging-in-Publication Data

Megson, T.H.G. (Thomas Henry Gordon)

An introduction to aircraft structural analysis / T.H.G. Megson.
p. cm.

Rev. ed. of: Aircraft structures for engineering students / T.H.G. Megson. 4th ed. 2007.

Includes bibliographical references and index.

ISBN 978-1-85617-932-4 (alk. paper)

1. Airframes. 2. Structural analysis (Engineering) I. Title.

TL671.6.M36 2010

629.134'31-dc22

2009050354

For information on all Butterworth-Heinemann publications
visit our Web site at www.elsevierdirect.com

Printed in the United States of America
10 11 12 13 14 10 9 8 7 6 5 4 3 2 1

Working together to grow
libraries in developing countries

www.elsevier.com | www.bookaid.org | www.sabre.org

ELSEVIER

BOOK AID
International

Sabre Foundation

Preface

During my experience of teaching aircraft structures, I have felt the need for a textbook written specifically for students of aeronautical engineering. Although there have been a number of excellent books written on the subject, they are now either out of date or too specialized in content to fulfill the requirements of an undergraduate textbook. With that in mind, I wrote *Aircraft Structures for Engineering Students*, the text on which this one is based. Users of that text have supplied many useful comments to the publisher, including comments that a briefer version of the book might be desirable, particularly for programs that do not have the time to cover all the material in the “big” book. That feedback, along with a survey done by the publisher, resulted in this book, *An Introduction to Aircraft Structural Analysis*, designed to meet the needs of more time-constrained courses.

Much of the content of this book is similar to that of *Aircraft Structures for Engineering Students*, but the chapter on “Vibration of Structures” has been removed since this is most often covered in a separate standalone course. The topic of Aeroelasticity has also been removed, leaving detailed treatment to the graduate-level curriculum. The section on “Structural Loading and Discontinuities” remains in the big book but not this “intro” one. While these topics help develop a deeper understanding of load transfer and constraint effects in aircraft structures, they are often outside the scope of an undergraduate text. The reader interested in learning more on those topics should refer to the “big” book. In the interest of saving space, the appendix on “Design of a Rear Fuselage” is available for download from the book’s companion Web site. Please visit www.elsevierdirect.com and search on “Megson” to find the Web site and the downloadable content.

Supplementary materials, including solutions to end-of-chapter problems, are available for registered instructors who adopt this book as a course text. Please visit www.textbooks.elsevier.com for information and to register for access to these resources.

The help of Tom Lacy, Associate Professor of Mechanical and Aerospace Engineering at Mississippi State University, is gratefully acknowledged in the development of this book.

T.H.G. Megson

Supporting material accompanying this book

A full set of worked solutions for this book are available for teaching purposes.

Please visit www.textbooks.elsevier.com and follow the registration instructions to access this material, which is intended for use by lecturers and tutors.

Contents

Preface	vii
---------------	-----

PART A FUNDAMENTALS OF STRUCTURAL ANALYSIS

CHAPTER 1	Basic Elasticity	3
1.1	Stress	3
1.2	Notation for Forces and Stresses	5
1.3	Equations of Equilibrium	7
1.4	Plane Stress	9
1.5	Boundary Conditions	9
1.6	Determination of Stresses on Inclined Planes	10
1.7	Principal Stresses	14
1.8	Mohr's Circle of Stress	16
1.9	Strain	20
1.10	Compatibility Equations	24
1.11	Plane Strain	25
1.12	Determination of Strains on Inclined Planes	25
1.13	Principal Strains	27
1.14	Mohr's Circle of Strain	28
1.15	Stress-Strain Relationships	28
1.16	Experimental Measurement of Surface Strains	37
	Problems	41
CHAPTER 2	Two-Dimensional Problems in Elasticity	45
2.1	Two-Dimensional Problems	45
2.2	Stress Functions	47
2.3	Inverse and Semi-Inverse Methods	48
2.4	St. Venant's Principle	53
2.5	Displacements	54
2.6	Bending of an End-Loaded Cantilever	55
	Problems	60
CHAPTER 3	Torsion of Solid Sections	65
3.1	Prandtl Stress Function Solution	65
3.2	St. Venant Warping Function Solution	75
3.3	The Membrane Analogy	77
3.4	Torsion of a Narrow Rectangular Strip	79
	Problems	82
CHAPTER 4	Virtual Work and Energy Methods	85
4.1	Work	85
4.2	Principle of Virtual Work	86
4.3	Applications of the Principle of Virtual Work	99
	Problems	107
CHAPTER 5	Energy Methods	111
5.1	Strain Energy and Complementary Energy	111
5.2	The Principle of the Stationary Value of the Total Complementary Energy	113

5.3	Application to Deflection Problems	114
5.4	Application to the Solution of Statically Indeterminate Systems.....	122
5.5	Unit Load Method	138
5.6	Flexibility Method	141
5.7	Total Potential Energy	147
5.8	The Principle of the Stationary Value of the Total Potential Energy	148
5.9	Principle of Superposition	151
5.10	The Reciprocal Theorem	151
5.11	Temperature Effects	156
	Problems	158
CHAPTER 6	Matrix Methods.....	169
6.1	Notation	170
6.2	Stiffness Matrix for an Elastic Spring	171
6.3	Stiffness Matrix for Two Elastic Springs in Line.....	172
6.4	Matrix Analysis of Pin-jointed Frameworks	176
6.5	Application to Statically Indeterminate Frameworks	183
6.6	Matrix Analysis of Space Frames	183
6.7	Stiffness Matrix for a Uniform Beam.....	185
6.8	Finite Element Method for Continuum Structures	193
	Problems	211
CHAPTER 7	Bending of Thin Plates	219
7.1	Pure Bending of Thin Plates	219
7.2	Plates Subjected to Bending and Twisting	223
7.3	Plates Subjected to a Distributed Transverse Load.....	227
7.4	Combined Bending and In-Plane Loading of a Thin Rectangular Plate	236
7.5	Bending of Thin Plates Having a Small Initial Curvature	240
7.6	Energy Method for the Bending of Thin Plates	241
	Problems	250
CHAPTER 8	Columns	253
8.1	Euler Buckling of Columns	253
8.2	Inelastic Buckling	259
8.3	Effect of Initial Imperfections	263
8.4	Stability of Beams under Transverse and Axial Loads	266
8.5	Energy Method for the Calculation of Buckling Loads in Columns	270
8.6	Flexural-Torsional Buckling of Thin-Walled Columns	274
	Problems	287
CHAPTER 9	Thin Plates.....	293
9.1	Buckling of Thin Plates	293
9.2	Inelastic Buckling of Plates.....	296
9.3	Experimental Determination of Critical Load for a Flat Plate	298
9.4	Local Instability	299
9.5	Instability of Stiffened Panels	300
9.6	Failure Stress in Plates and Stiffened Panels.....	302
9.7	Tension Field Beams	304
	Problems	320

PART B ANALYSIS OF AIRCRAFT STRUCTURES

CHAPTER 10	Materials	327
10.1	Aluminum Alloys	327
10.2	Steel	329
10.3	Titanium	330
10.4	Plastics	331
10.5	Glass	331
10.6	Composite Materials	331
10.7	Properties of Materials	333
	Problems	349
CHAPTER 11	Structural Components of Aircraft	351
11.1	Loads on Structural Components	351
11.2	Function of Structural Components	354
11.3	Fabrication of Structural Components	359
11.4	Connections	363
	Problems	370
CHAPTER 12	Airworthiness	373
12.1	Factors of Safety-Flight Envelope	373
12.2	Load Factor Determination	375
CHAPTER 13	Airframe Loads	379
13.1	Aircraft Inertia Loads	379
13.2	Symmetric Maneuver Loads	386
13.3	Normal Accelerations Associated with Various Types of Maneuver	391
13.4	Gust Loads	393
	Problems	399
CHAPTER 14	Fatigue	403
14.1	Safe Life and Fail-Safe Structures	403
14.2	Designing Against Fatigue	404
14.3	Fatigue Strength of Components	405
14.4	Prediction of Aircraft Fatigue Life	409
14.5	Crack Propagation	414
	Problems	420
CHAPTER 15	Bending of Open and Closed, Thin-Walled Beams	423
15.1	Symmetrical Bending	424
15.2	Unsymmetrical Bending	433
15.3	Deflections due to Bending	441
15.4	Calculation of Section Properties	456
15.5	Applicability of Bending Theory	466
15.6	Temperature Effects	466
	Problems	471
CHAPTER 16	Shear of Beams	479
16.1	General Stress, Strain, and Displacement Relationships for Open and Single Cell Closed Section Thin-Walled Beams	479
16.2	Shear of Open Section Beams	483

16.3	Shear of Closed Section Beams	488
	Problems	496
CHAPTER 17	Torsion of Beams	503
17.1	Torsion of Closed Section Beams	503
17.2	Torsion of Open Section Beams	514
	Problems	521
CHAPTER 18	Combined Open and Closed Section Beams	529
18.1	Bending	529
18.2	Shear	529
18.3	Torsion	533
	Problems	534
CHAPTER 19	Structural Idealization	537
19.1	Principle	537
19.2	Idealization of a Panel	538
19.3	Effect of Idealization on the Analysis of Open and Closed Section Beams	541
19.4	Deflection of Open and Closed Section Beams	553
	Problems	556
CHAPTER 20	Wing Spars and Box Beams	561
20.1	Tapered Wing Spar	561
20.2	Open and Closed Section Beams	565
20.3	Beams Having Variable Stringer Areas	571
	Problems	574
CHAPTER 21	Fuselages	577
21.1	Bending	577
21.2	Shear	578
21.3	Torsion	581
21.4	Cutouts in Fuselages	584
	Problems	585
CHAPTER 22	Wings	587
22.1	Three-Boom Shell	587
22.2	Bending	588
22.3	Torsion	590
22.4	Shear	594
22.5	Shear Center	599
22.6	Tapered Wings	600
22.7	Deflections	603
22.8	Cutouts in Wings	605
	Problems	613
CHAPTER 23	Fuselage Frames and Wing Ribs	619
23.1	Principles of Stiffener/Web Construction	619
23.2	Fuselage Frames	625
23.3	Wing Ribs	626
	Problems	630
	Index	633

PART

Fundamentals of Structural Analysis

A

Basic Elasticity

We shall consider, in this chapter, the basic ideas and relationships of the theory of elasticity. The treatment is divided into three broad sections: stress, strain, and stress–strain relationships. The third section is deferred until the end of the chapter to emphasize that the analysis of stress and strain—for example, the equations of equilibrium and compatibility—does not assume a particular stress–strain law. In other words, the relationships derived in Sections 1.1 through 1.14 inclusive are applicable to nonlinear as well as linear elastic bodies.

1.1 STRESS

Consider the arbitrarily shaped, three-dimensional body shown in Fig. 1.1. The body is in equilibrium under the action of externally applied forces P_1, P_2, \dots , and is assumed to comprise a continuous and deformable material so that the forces are transmitted throughout its volume. It follows that at any internal point O , there is a resultant force δP . The particle of material at O subjected to the force δP is in equilibrium so that there must be an equal but opposite force δP (shown dotted in Fig. 1.1) acting on the particle at the same time. If we now divide the body by any plane nn containing O , then these two

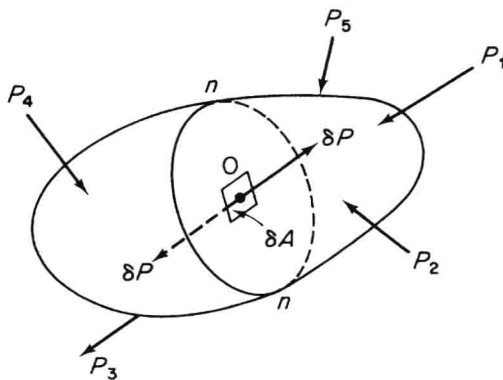


Fig. 1.1

Internal force at a point in an arbitrarily shaped body.

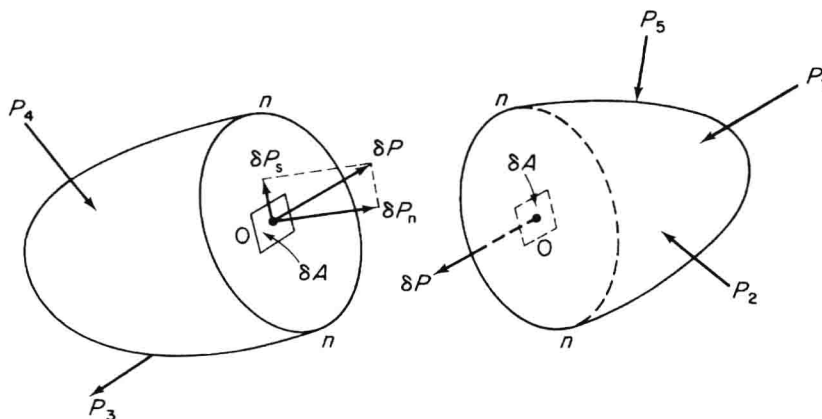


Fig. 1.2

Internal force components at the point O.

forces δP may be considered uniformly distributed over a small area δA of each face of the plane at the corresponding point O, as in Fig. 1.2. The *stress* at O is then defined by the equation

$$\text{Stress} = \lim_{\delta A \rightarrow 0} \frac{\delta P}{\delta A} \quad (1.1)$$

The directions of the forces δP in Fig. 1.2 are such that they produce *tensile* stresses on the faces of the plane nn . It must be realized here that while the direction of δP is absolute, the choice of plane is arbitrary so that although the direction of the stress at O will always be in the direction of δP , its magnitude depends on the actual plane chosen, since a different plane will have a different inclination and therefore a different value for the area δA . This may be more easily understood by reference to the bar in simple tension in Fig. 1.3. On the cross-sectional plane mm , the uniform stress is given by P/A , while on the inclined plane $m'm'$, the stress is of magnitude P/A' . In both cases, the stresses are parallel to the direction of P .

Generally, the direction of δP is not normal to the area δA , in which case it is usual to resolve δP into two components: one, δP_n , normal to the plane and the other, δP_s , acting in the plane itself (see Fig. 1.2). Note that in Fig. 1.2 the plane containing δP is perpendicular to δA . The stresses associated with these components are a *normal* or *direct stress* defined as

$$\sigma = \lim_{\delta A \rightarrow 0} \frac{\delta P_n}{\delta A} \quad (1.2)$$

and a *shear stress* defined as

$$\tau = \lim_{\delta A \rightarrow 0} \frac{\delta P_s}{\delta A} \quad (1.3)$$

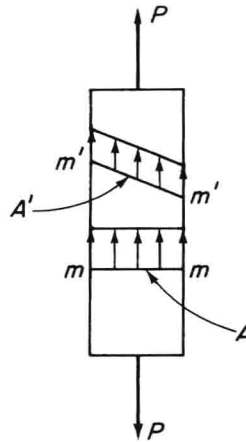


Fig. 1.3

Values of stress on different planes in a uniform bar.

The resultant stress is computed from its components by the normal rules of vector addition, namely

$$\text{Resultant stress} = \sqrt{\sigma^2 + \tau^2}$$

Generally, however, as just indicated, we are interested in the separate effects of σ and τ .

However, to be strictly accurate, stress is not a vector quantity, for, in addition to magnitude and direction, we must specify the plane on which the stress acts. Stress is therefore a *tensor*, with its complete description depending on the two vectors of force and surface of action.

1.2 NOTATION FOR FORCES AND STRESSES

It is usually convenient to refer the state of stress at a point in a body to an orthogonal set of axes $Oxyz$. In this case, we cut the body by planes parallel to the direction of the axes. The resultant force δP acting at the point O on one of these planes may then be resolved into a normal component and two in-plane components as shown in Fig. 1.4, thereby producing one component of direct stress and two components of shear stress.

The direct stress component is specified by reference to the plane on which it acts, but the stress components require a specification of direction in addition to the plane. We therefore allocate a single subscript to direct stress to denote the plane on which it acts and two subscripts to shear stress, the first specifying the plane and the second direction. Therefore, in Fig. 1.4, the shear stress components are τ_{zx} and τ_{zy} acting on the z plane and in the x and y directions, respectively, while the direct stress component is σ_z .

We may now completely describe the state of stress at a point O in a body by specifying components of shear and direct stresses on the faces of an element of side δx , δy , and δz , formed at O by the cutting planes as indicated in Fig. 1.5.

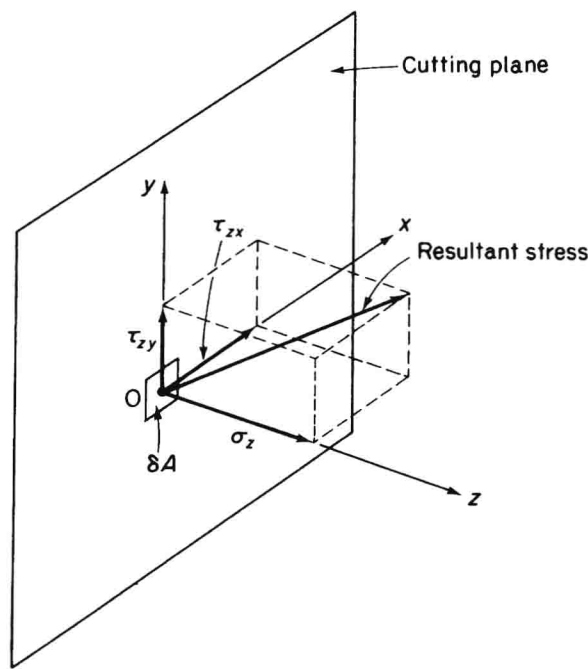


Fig. 1.4

Components of stress at a point in a body.

The sides of the element are infinitesimally small so that the stresses may be assumed to be uniformly distributed over the surface of each face. On each of the opposite faces, there will be, to a first simplification, equal but opposite stresses.

We shall now define the directions of the stresses in Fig. 1.5 as positive so that normal stresses directed away from their related surfaces are tensile and positive, and opposite compressive stresses are negative. Shear stresses are positive when they act in the positive direction of the relevant axis in a plane on which the direct tensile stress is in the positive direction of the axis. If the tensile stress is in the opposite direction, then positive shear stresses are in directions opposite to the positive directions of the appropriate axes.

Two types of external forces may act on a body to produce the internal stress system we have already discussed. Of these, *surface forces* such as P_1, P_2, \dots , or hydrostatic pressure are distributed over the surface area of the body. The surface force per unit area may be resolved into components parallel to our orthogonal system of axes, and these are generally given the symbols \bar{X} , \bar{Y} , and \bar{Z} . The second force system derives from gravitational and inertia effects, and the forces are known as *body forces*. These are distributed over the volume of the body, and the components of body force per unit volume are designated X , Y , and Z .

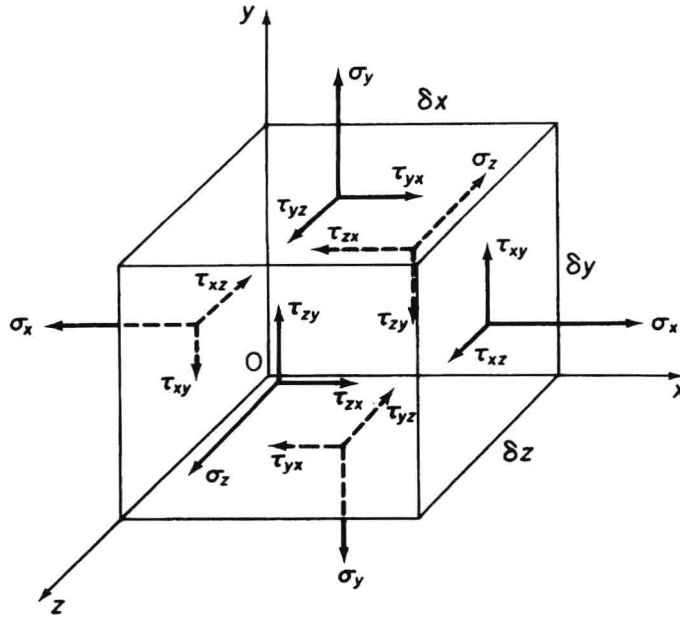


Fig. 1.5

Sign conventions and notation for stresses at a point in a body.

1.3 EQUATIONS OF EQUILIBRIUM

Generally, except in cases of uniform stress, the direct and shear stresses on opposite faces of an element are not equal as indicated in Fig. 1.5 but differ by small amounts. Therefore if, say, the direct stress acting on the z plane is σ_z , then the direct stress acting on the $z + \delta z$ plane is, from the first two terms of a Taylor's series expansion, $\sigma_z + (\partial \sigma_z / \partial z) \delta z$. We now investigate the equilibrium of an element at some internal point in an elastic body where the stress system is obtained by the method just described.

In Fig. 1.6, the element is in equilibrium under forces corresponding to the stresses shown and the components of body forces (not shown). Surface forces acting on the boundary of the body, although contributing to the production of the internal stress system, do not directly feature in the equilibrium equations.

Taking moments about an axis through the center of the element parallel to the z axis

$$\begin{aligned} \tau_{xy} \delta y \delta z \frac{\delta x}{2} + \left(\tau_{xy} + \frac{\partial \tau_{xy}}{\partial x} \delta x \right) \delta y \delta z \frac{\delta x}{2} - \tau_{yx} \delta x \delta z \frac{\delta y}{2} \\ - \left(\tau_{yx} + \frac{\partial \tau_{yx}}{\partial y} \delta y \right) \delta x \delta z \frac{\delta y}{2} = 0 \end{aligned}$$

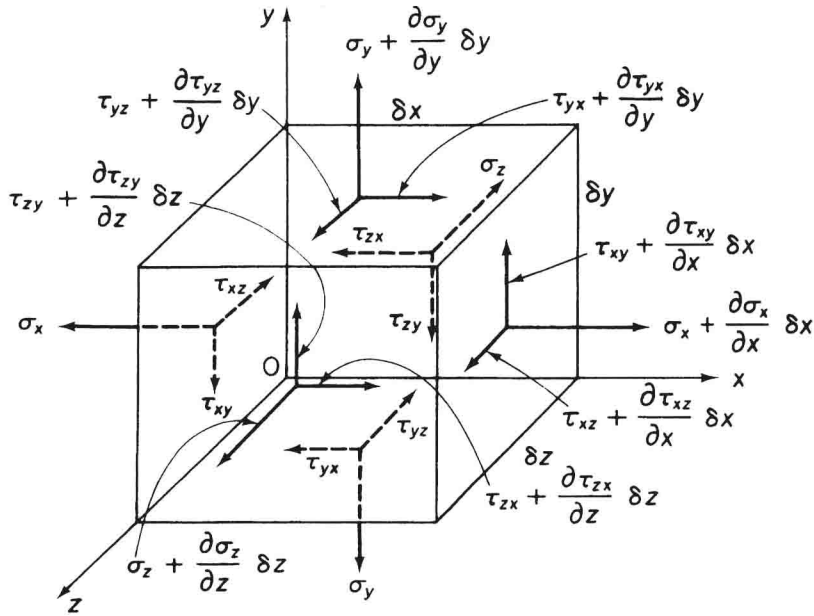


Fig. 1.6

Stresses on the faces of an element at a point in an elastic body.

which simplifies to

$$\tau_{xy} \delta y \delta z \delta x + \frac{\partial \tau_{xy}}{\partial x} \delta y \delta z \frac{(\delta x)^2}{2} - \tau_{yx} \delta x \delta z \delta y - \frac{\partial \tau_{yx}}{\partial y} \delta x \delta z \frac{(\delta y)^2}{2} = 0$$

Dividing by $\delta x \delta y \delta z$ and taking the limit as δx and δy approach zero.

Similarly,

$$\left. \begin{aligned} \tau_{xy} &= \tau_{yx} \\ \tau_{xz} &= \tau_{zx} \\ \tau_{yz} &= \tau_{zy} \end{aligned} \right\} \quad (1.4)$$

We see, therefore, that a shear stress acting on a given plane (τ_{xy} , τ_{xz} , τ_{yz}) is always accompanied by an equal *complementary shear stress* (τ_{yx} , τ_{zx} , τ_{zy}) acting on a plane perpendicular to the given plane and in the opposite sense.

Now considering the equilibrium of the element in the x direction

$$\begin{aligned} \left(\sigma_x + \frac{\partial \sigma_x}{\partial x} \delta x \right) \delta y \delta z - \sigma_x \delta y \delta z + \left(\tau_{yx} + \frac{\partial \tau_{yx}}{\partial y} \delta y \right) \delta x \delta z \\ - \tau_{yx} \delta x \delta z + \left(\tau_{zx} + \frac{\partial \tau_{zx}}{\partial z} \delta z \right) \delta x \delta y \\ - \tau_{zx} \delta x \delta y + X \delta x \delta y \delta z = 0 \end{aligned}$$

which gives

$$\frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{yx}}{\partial y} + \frac{\partial \tau_{zx}}{\partial z} + X = 0$$

Or, writing $\tau_{xy} = \tau_{yx}$ and $\tau_{xz} = \tau_{zx}$ from Eq. (1.4).

$$\text{Similarly,} \quad \left. \begin{aligned} \frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} + \frac{\partial \tau_{xz}}{\partial z} + X &= 0 \\ \frac{\partial \sigma_y}{\partial y} + \frac{\partial \tau_{yx}}{\partial x} + \frac{\partial \tau_{yz}}{\partial z} + Y &= 0 \\ \frac{\partial \sigma_z}{\partial z} + \frac{\partial \tau_{zx}}{\partial x} + \frac{\partial \tau_{zy}}{\partial y} + Z &= 0 \end{aligned} \right\} \quad (1.5)$$

The *equations of equilibrium* must be satisfied at all interior points in a deformable body under a three-dimensional force system.

1.4 PLANE STRESS

Most aircraft structural components are fabricated from thin metal sheet so that stresses across the thickness of the sheet are usually negligible. Assuming, say, that the z axis is in the direction of the thickness, then the three-dimensional case of Section 1.3 reduces to a two-dimensional case in which σ_z , τ_{xz} , and τ_{yz} are all zero. This condition is known as *plane stress*; the equilibrium equations then simplify to

$$\left. \begin{aligned} \frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} + X &= 0 \\ \frac{\partial \sigma_y}{\partial y} + \frac{\partial \tau_{yx}}{\partial x} + Y &= 0 \end{aligned} \right\} \quad (1.6)$$

1.5 BOUNDARY CONDITIONS

The equations of equilibrium (1.5) (and also (1.6) for a two-dimensional system) satisfy the requirements of equilibrium at all internal points of the body. Equilibrium must also be satisfied at all positions on the boundary of the body where the components of the surface force per unit area are \bar{X} , \bar{Y} , and \bar{Z} . The triangular element of Fig. 1.7 at the boundary of a two-dimensional body of unit thickness is then in equilibrium under the action of surface forces on the elemental length AB of the boundary and internal forces on internal faces AC and CB.

Summation of forces in the x direction gives

$$\bar{X}\delta s - \sigma_x\delta y - \tau_{yx}\delta x + X\frac{1}{2}\delta x\delta y = 0$$