


Engineering Drawing

THIRD EDITION

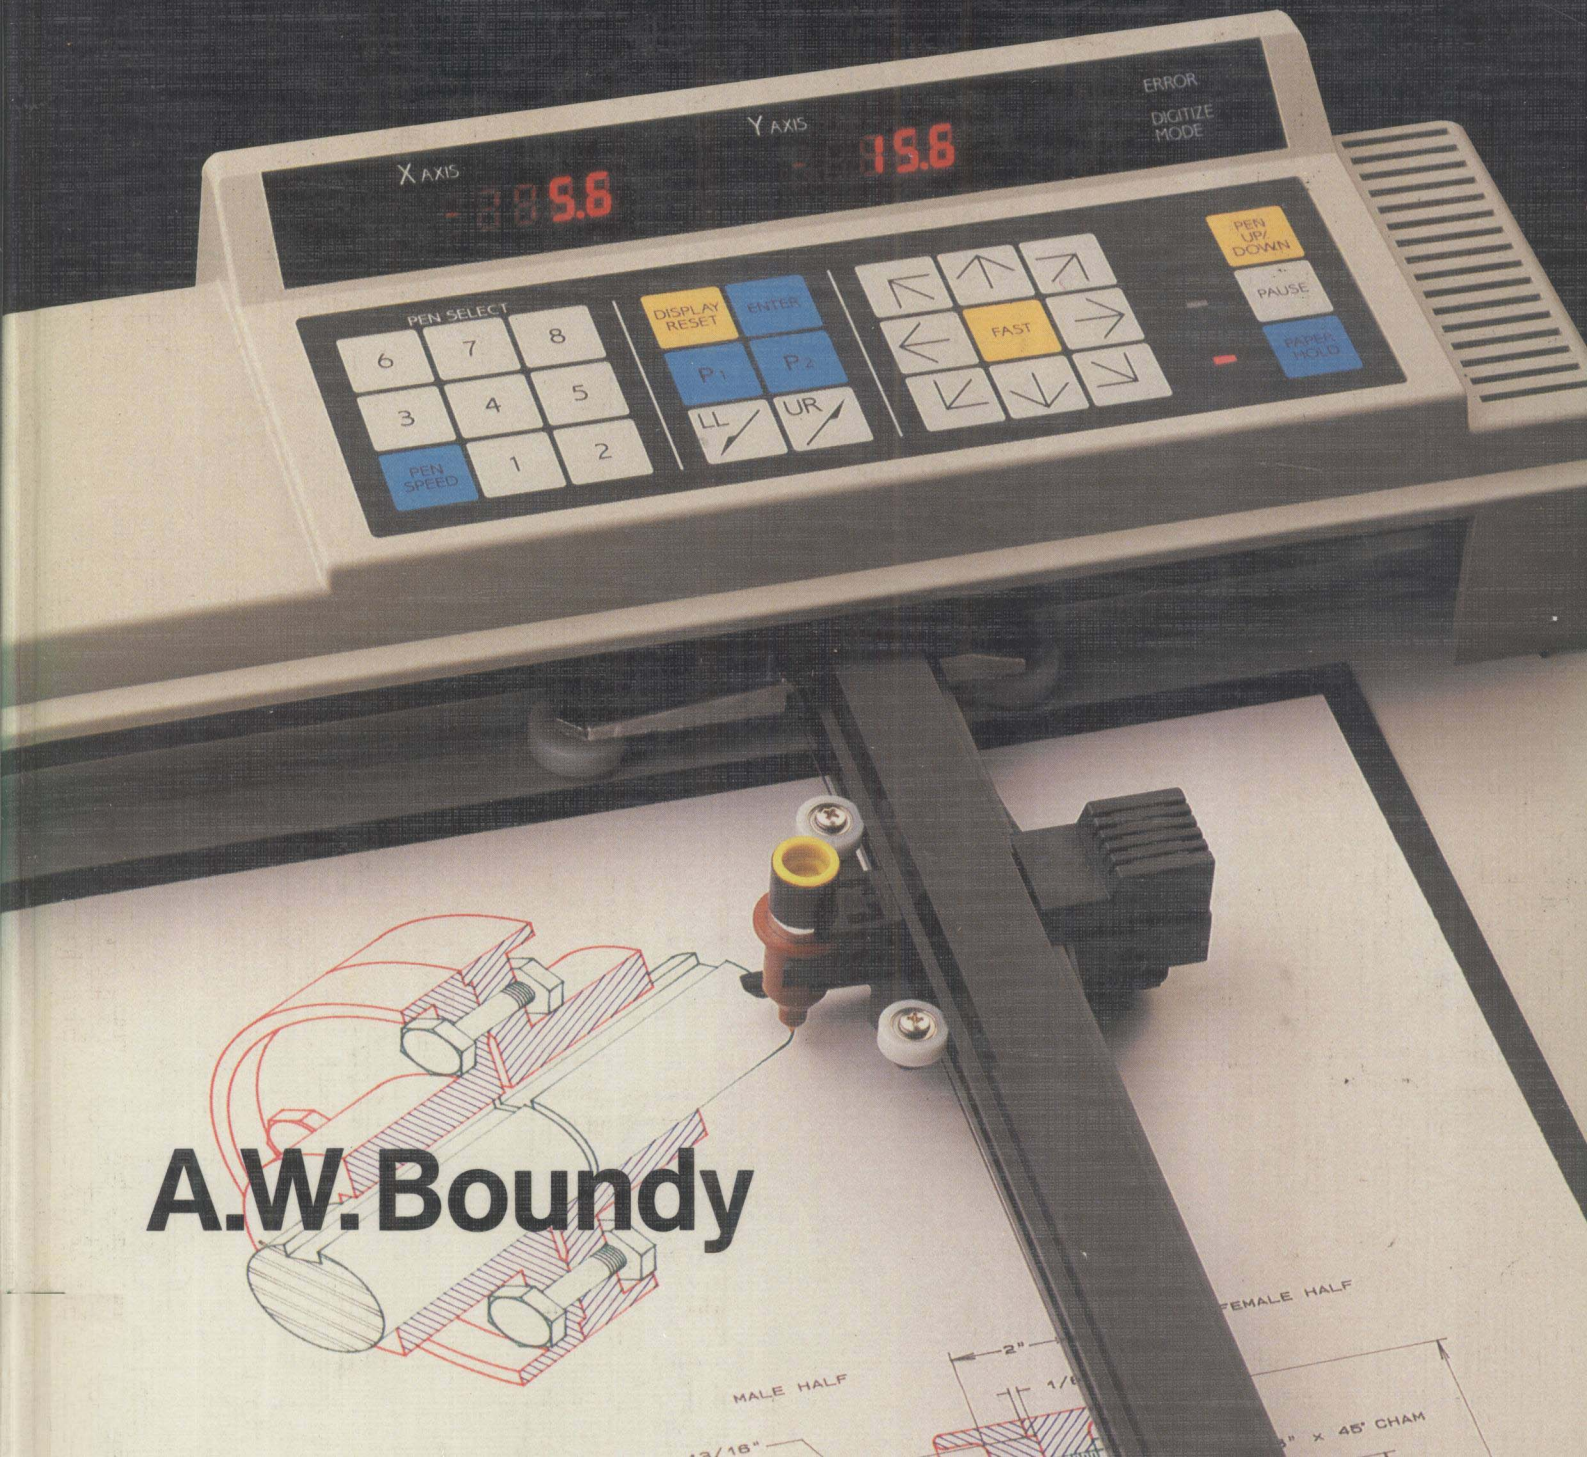

A.W. Boundy

Engineering Drawing

THIRD EDITION

A.W. Boundy

*Ass. Dip. Mech. Eng., M. Phil.,
M.I.I.E. Aust., M.I.I.E. U.S.A.*

*Associate Dean (Resources)
School of Engineering
Darling Downs Institute of Advanced Education*

McGRAW-HILL BOOK COMPANY SYDNEY

New York St Louis San Francisco Auckland Bogotá
Hamburg Lisbon London Madrid Mexico City
Montreal New Delhi Panama Paris San Juan São Paulo
Singapore Tokyo Toronto

Second edition 1980
Reprinted 1981 (twice), 1982, 1983, 1984, 1985, 1986

Copyright © 1987 by McGraw-Hill Book Company Australia Pty Limited

Apart from any fair dealing for the purposes of study, research, criticism or review, as permitted under the Copyright Act, no part may be reproduced by any process without written permission. Inquiries should be made to the publisher.

Copying for educational purposes

Where copies of part or the whole of the book are made under section 53B or section 53D of the Act, the law requires that records of such copying be kept. In such cases the copyright owner is entitled to claim payment.

A52530

**National Library of Australia
Cataloguing-in-Publication data:**

Boundy, A.W. (Albert William).
Engineering drawing.
3rd ed.
ISBN 0 07 45230 1.
1. Mechanical drawing. I. Title.
604.2'4

Produced in Australia by McGraw-Hill Book Company Australia Pty Limited
4 Barcoo Street, Roseville, NSW 2069
Typeset in Australia by Midland Typesetters Pty Ltd
Printed in Australia by Macarthur Press Sales Pty Limited

Sponsoring Editor: Isabel Hogan
Production Editor: Robyn Wilkie
Designer: George Sirett

Preface

This book has been written for students of Engineering Drawing. Two features of the book will, I hope, make the subject easier to understand and use of the text beneficial.

First, lengthy explanatory detail has been reduced to a minimum, with the step-by-step method of instruction being used wherever possible.

Second, the problem format is that of examination questions, giving the student essential practice in this approach.

Emphasis has been placed on providing a large number and wide variety of problems for the various topics dealt with. Therefore, a complete instructional and practical syllabus can be prepared to a content depth consistent with prescribed course objectives.

Several reference tables commonly used by drafters have been included so that students may gain knowledge and practice in their use when solving the problems. The tables, along with other information, make the book a valuable reference for practising drafters and engineers.

The third edition has been revised throughout to conform to current Australian Standards. Some sections have been expanded, and two new topics—Geometry tolerancing and Computer-aided design and drafting/Computer-aided manufacture—have been added because of their increasing importance in modern technology.

Contents

Preface ix

Chapter 1 Introductory and standards information 1

Standard abbreviations 2

Types of line 4

Scales 5

Use of scales 5

Indication of scales 6

Line thicknesses 6

Sizes of drawing paper 6

Preferred sheet series 6

Non-preferred sheet series 6

Rolls 6

Layouts of drawing sheets 8

Sheet frames (borderlines) 8

Title block 8

Material or parts list 8

Revisions table 8

Zoning 8

Dimensioning 12

Dimension and projection lines 12

Linear dimensions 12

Angular dimensions 12

Methods of dimensioning 12

Staggered dimensions 14

Overall dimensions 14

Auxiliary dimensions 14

Dimensions not to scale 14

Dimensions not complete 15

Dimensioning drawing features 15

Diameters 15

Radii and small spaces 16

Spherical surfaces 16

Squares 17

Holes 17

Flanges 17

Countersinks 18

Counterbores 18

Spotfaces 18

Chamfers 19

Keys—square and rectangular 19

Woodruff keys 20

Tapers 20

Screw threads 21

General representation 21

Threads on assembly and special threads 21

Designation of threaded members 22

Dimensioning full and runout threads in holes 23

The ISO metric thread 23

Graphical comparison of metric thread series 24

Tapping size and clearance holes for ISO metric threads 24

Sectioning—symbols and methods 26

General symbol 26

Sectioning lines (cross-hatching) 26

Adjacent parts 26

Dimensions 26

Large areas 27

Section cutting plane:
Application 27

Sectioning thin areas 27

Exceptions to the general rule 28

Interposed and revolved sections 28

Removed sections 28

Part or local sections 28

Aligned sections 28

Drawing sectional views 29

The full sectional view 29

The offset sectional view 30

The half sectional view 30

Rules to remember when sectioning 31

Welding drafting 31

- Welding standards 31
- Welding terminology 31
- Basic symbols 32
- Standard welding symbol 32
- Application of the standard welding symbol 33
- Welding procedures 33
- Joint preparation 33

Surface texture 38

- Indication on drawings 38
- Surface texture terminology 38
- Surface roughness measurement— R_a 38
- The standard symbol 39
- Surface roughness (R_a) applications 39
- Application of surface finish symbol to drawings 39
- Roughness grade numbers 39
- Direction of surface pattern or lay 39

Representation of common features 44**Fits and tolerances 47**

- Introduction 47
- Shaft 47
- Hole 47
- Basic size 47
- Limits of size 48
- Deviation 48
- Tolerance 48
- Fit 48
- Allowance 49
- Grades of tolerance 49
- Bilateral limits 49
- Unilateral limits 49
- Fundamental deviation of tolerance 49
- The hole-basis system 50
- The shaft-basis system 50
- Designation of a fit 50
- Application of tolerances to dimensions 54
- Methods of dimensioning to avoid accumulation of tolerances 56

Assembly of components 56

- Introduction 56
- Types of assemblies 57
- Components assembled externally 57
- Components assembled internally 57

Problems (limits and fits) 59**Geometry tolerancing 60**

- Introduction 60

Types of geometry tolerances 61

Terms used in geometry tolerancing 61

Methods of displaying geometry tolerances 63

- Tolerance frame method 63
- Datum feature 63

Interpretation of form tolerancing 63

- Flatness 63
- Straightness 63
- Squareness 64
- Position 64
- Parallelism 64
- Roundness or circularity 64
- Cylindricity 65
- Profiles 65
- Angularity 65
- Concentricity 65
- Symmetry 65
- Runout 66

Problems (geometry tolerancing) 73**Computer-aided design and drafting/Computer-aided manufacture 75**

- Introduction 75
- Traditional design methods 75
- Principles of CAD/CAM 76
- CAD/CAM hardware 76
- CAD/CAM software 77
- The CAD process 77
- Computer-aided manufacture (CAM) 81

Chapter 2 Geometrical constructions 83**Drawing instrument exercises 84****Geometrical constructions used in engineering drawing 86**

- Application of the involute curve 96
- The cylindrical helix 96

Cams 99

- Types of cam 99
- Applications 99
- Displacement diagram 99

Conic sections 105

- The ellipse 107
- The parabola 110

Problems 113

- Cycloids, involute, spirals, curves 113
- Helixes 113

Cams 114
Conic sections 116

**Construction of geometrical shapes
and templates 117**

Chapter 3 **Orthogonal projection: First
and third angle 121**

Introduction 122
Principles of projection 122

Third-angle projection 122

Designation of third-angle
views 122

Number of views 124

Projection of orthogonal
views 124

First-angle projection 127

Relationship between first-angle
and third-angle views 127

**Production of a mechanical
drawing 127**

1. Drawing of borderline and
location of views 127
2. Light construction of views 128
3. Lining in of views 128
4. Dimensioning and insertion of
subtitles and notes 128
5. Drawing of title block, parts list
and revisions table 130

Exercises 132

Chapter 4 **Auxiliary views: Primary and
secondary 155**

Auxiliary orthogonal views 157

Introduction 157

Primary auxiliary views 157

Types of primary auxiliary
views 157

Partial auxiliary views 157

Orientation of auxiliary views 157

Secondary auxiliary views 161

Procedure 161

Use of a secondary auxiliary view
to construct normal views 161

General rules 161

Problems 163

Chapter 5 **Pictorial drawing: Isometric
and oblique parallel
projection 177**

Introduction 178

Axonometric projection 178

Isometric projection 178

Isometric scale 178

Isometric drawing 178

Selection of isometric axes 179

Isometric circles—ordinate
method 179

Isometric circles—four-centre
method 179

Isometric curves 179

Isometric angles and non-isometric
lines 179

Making an isometric drawing 182

**Representation of details common
to pictorial drawings 183**

Fillets and rounds 183

Threads 183

Sectioning 183

Dimensioning 183

Oblique parallel projection 184

Length of depth lines 184

Circles on the oblique face 185

Angles on oblique drawings 185

Selection of the receding axis 186

Problems 187

Chapter 6 **Working drawings: Detail and
assembly drawing 195**

Detail drawings 196

Assembly drawings 196

Working drawings 198

Problems (working drawings) 198

Chapter 7 **Drawing analysis 221**

Sample analysis 222

Problems 225

Chapter 8 **Intersections and
development of
surfaces 233**

Development of prisms 234

Rectangular right prism 234

Truncated right prism 234

Rectangular prism pipe elbow 234

Hexagonal right prism 236

Truncated hexagonal right
prism 236

Truncated oblique hexagonal
prism 236

Other prismatic shapes 236

**True length and inclination of
lines 238**

Methods of determining true
length 238

Line of intersection—cylinders and cones 242

1. Element method 242
2. Cutting plane method 242
3. Common sphere method 242

Development of cylinders 244

- Right cylinder 244
- Truncated right cylinder 244
- Oblique cylinder 244

Development of T pieces 246

- Oblique T piece—equal diameter cylinders 246
- Offset oblique T piece—unequal diameter cylinders 248
- Oblique cylindrical connecting pipe 251

Development of pyramids 252

- Right pyramid 252
- Oblique pyramid 254

Development of cones 256

- Right cone 256
- Right cone truncated parallel to the base 258
- Right cone truncated at an angle to the base 258
- Right cone—vertical cylinder intersection 260

Truncated right cone—right cylinder intersection 262

Right cone—right cylinder, oblique intersection 264

Oblique cone 266

Oblique cone—oblique cylinder intersection 268

Development of breeches or Y pieces 270

Breeches piece—equal angle, equal diameters; unequal angle, equal diameters 270

Breeches piece—cylinder and two cones, equal angle 270

Development of transition pieces 274

Round-to-round transition piece 274

Square-to-round transition piece 276

Oblique hood 278

Offset rectangle-to-rectangle transition piece 280

Problems (development) 282

Introductory and standards information



Engineering drawing is the main method of communication between all persons concerned with the design and manufacture of components; the building and construction of works; and engineering projects required by management or professional engineering staff.

The practice of drawing is in many ways so repetitive that, in the interests of efficient communication, it is necessary to standardise methods to ensure the desired interpretation.

The Standards Association of Australia has recommended standards for drawing practice in all fields of engineering, and these are set out in their publications Australian Standards (AS) 1100 Parts 101 and 201.

This section presents the standards which are relevant to mechanical drawing, and provides other introductory information that is often required by drafters and students.

Standard abbreviations

The abbreviations in Table 1.1 have been selected from the more comprehensive list found in AS 1100

Part 101, and are those which are commonly used on mechanical engineering drawings.

Table 1.1 Standard abbreviations

Term	Abbreviation	Term	Abbreviation
A		diamond pyramid hardness number (vickers)	HV
abbreviation	ABBR	dimension	DIM
absolute	ABS	distance	DIST
across flats	AF	drawing	DRG
addendum	ADD	E	
approximate	APPROX	elevation	ELEV
arrangement	ARRGT	equivalent	EQUIV
assembly	ASSY	external	EXT
assumed datum	ASSD	F	
automatic	AUTO	figure	FIG
auxiliary	AUX	fillister head	FILL HD
average	AVG	flange	FLG
B		flat	FL
bearing	BRG	G	
bottom	BOT	galvanise	GALV
bracket	BRKT	galvanised iron	GI
brass	BRS	galvanised-iron pipe	GIP
building	BLDG	general arrangement	GA
C		general-purpose outlet	GPO
capacity	CAP	geometric reference frame	GRF
cast iron	CI	grade	GR
cast-iron pipe	CIP	grid	GD
cast steel	CS	H	
centre line	CL	head	HD
centre of gravity	CG	height	HT
centre-to-centre, centres	CRS	hexagon	HEX
chamfer	CHAM	hexagon head	HEX HD
channel	CHNL	hexagon-socket head	HEX SOC HD
cheese head	CH HD	high strength	HS
chrome plated	CP	high-tensile steel	HTS
circle	CIRC	horizontal	HORIZ
circular hollow section	CHS	I	
circumference	CIRC	inside diameter	ID
coefficient	COEF	internal	INT
cold-rolled steel	CRS	J	
computer-aided design and drafting	CAD	joint	JT
computer-aided manufacture	CAM	junction	JUNC
concentric	CONC	L	
contour	CTR	least material condition	LMC
corner	CNR	left hand	LH
counterbore	CBORE	length	LG
countersink	CSK	longitudinal	LONG
countersunk head	CSK HD	M	
cross-recess head	C REC HD	machine	M/C
cup head	CUP HD	malleable iron	MI
cylinder	CYL	material	MATL
D		maximum	MAX
dedendum	DED	maximum material condition	MMC
detail	DET	mechanical	MECH
diagonal	DIAG	mild steel	MS
diagram	DIAG		
diameter	DIA		
diametral pitch	DP		

Term	Abbreviation	Term	Abbreviation
minimum	MIN	rolled-holed section	RHS
modification	MOD	rolled-steel angle	RSA
modulus of elasticity	E	rolled-steel channel	RSC
modulus of section	Z	rolled-steel joist	RSJ
moment of inertia	I	roughness value	R_a
mounting	MTG	round	RD
mushroom head	MUSH HD	round head	RD HD
N		S	
negative	NEG	schedule	SCHED
nominal	NOM	section	SECT
nominal size	NS	sheet	SH
not to scale	NTS	sketch	SK
number	NO	spherical	SPHER
O		spigot	SPT
octagon	OCT	spotface	SF
outside diameter	OD	spring steel	SPR STL
P		square	SQ
parallel	PAR	square hollow section	SHS
part	PT	stainless steel (corrosion-resistant steel)	
pattern	PATT	standard	CRES
pipe	P	Standards Association of Australia	STD
pipeline	PL	steel	SAA
pitch-circle diameter	PCD	switch	ST
phosphor bronze	PH BRZ		SW
position	POSN	T	
positive	POS	tangent point	TP
prefabricated	PREFAB	temperature	TEMP
pressure	PRESS	thread	THD
pressure angle	PA	tolerance	TOL
Q		true position	TP
quantity	QTY	true profile	TP
R		U	
radius	RAD	undercut	UCUT
raised countersunk head	RSD CSK HD	universal beam	UB
rectangular	RECT	universal column	UC
rectangular hollow section	RHS	V	
reference	REF	vertical	VERT
regardless of feature size	RFS	volume	VOL
required	REQD	W	
right hand	RH	wrought iron	WI
Rockwell hardness A	HRA	Y	
Rockwell hardness B	HRB	yield point	YP
Rockwell hardness C	HRC		

Types of line







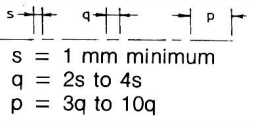



The types of line which are commonly used in engineering drawings are illustrated in Table 1.2.

Figure 1.1 includes examples of the use of nine types of lines, lettered to correspond with the types above (with the exception of type *F*).

1. The *visible outline* of the bracket, type *A*, is heavy and dark enough to make it stand out clearly on the drawing sheet. This line should be of even thickness and darkness.

2. The *dimension, projection, cross-hatching and leader line*, type *B*, is illustrated. Leader lines are of two types, one which terminates with an arrowhead at an outline and the other which terminates in a dot (4) within the outline of the part to which it refers. Leaders should be nearly at right angles to any line or surface. Further uses of type *B* lines are to partly outline the adjacent part to which the bracket is bolted and to represent fictitious outlines such as

Table 1.2 Types of lines

Type	Description	Drawing example	Usage
A	continuous thick line		to indicate visible outlines
B	continuous thin line		for fictitious outlines, dimensions, projection, hatching and leader lines; also for the imaginary intersection of surfaces, revolved sections, adjacent parts, fold and tangent bend lines, short centre lines, and for indicating repeated detail
C	continuous thin freehand line		on part sectional boundary lines or to terminate a part view, and for short break lines
D	continuous thin ruled line with intermittent zigzag		to show a break on an adjacent member to which a component is attached; also to indicate a break in a long continuous series of lines on architectural or structural drawings
E	thin dashed line	 s = 1 mm minimum q = 2 s to 4 s	to show outlines of hidden features: • for complete hidden features, the line should begin and end with a dash • dashes should meet at corners • where a hidden line is a continuation of a visible outline, it should commence with a space
F	medium dashed line	 (proportions as for E)	in electrotechnology drawing only; for assemblies, boxes and other containers
G	thin chain line	 s = 1 mm minimum q = 2s to 4s p = 3q to 10q	to indicate centre lines, pitch lines, path movement, developed views, material for removal and features in front of a cutting plane
H	chain line, thick at the ends and at change of direction but thin elsewhere	 (proportions as for G)	to indicate a cutting plane for sectional views
J	thick chain line	 (proportions as for G)	to indicate surfaces which must comply with certain requirements such as heat treatment or surface finish
K	thin double-dashed chain line	 (proportions as for G)	to indicate adjacent parts, alternative and extreme positions of moving parts, centroidal lines and tooling profiles

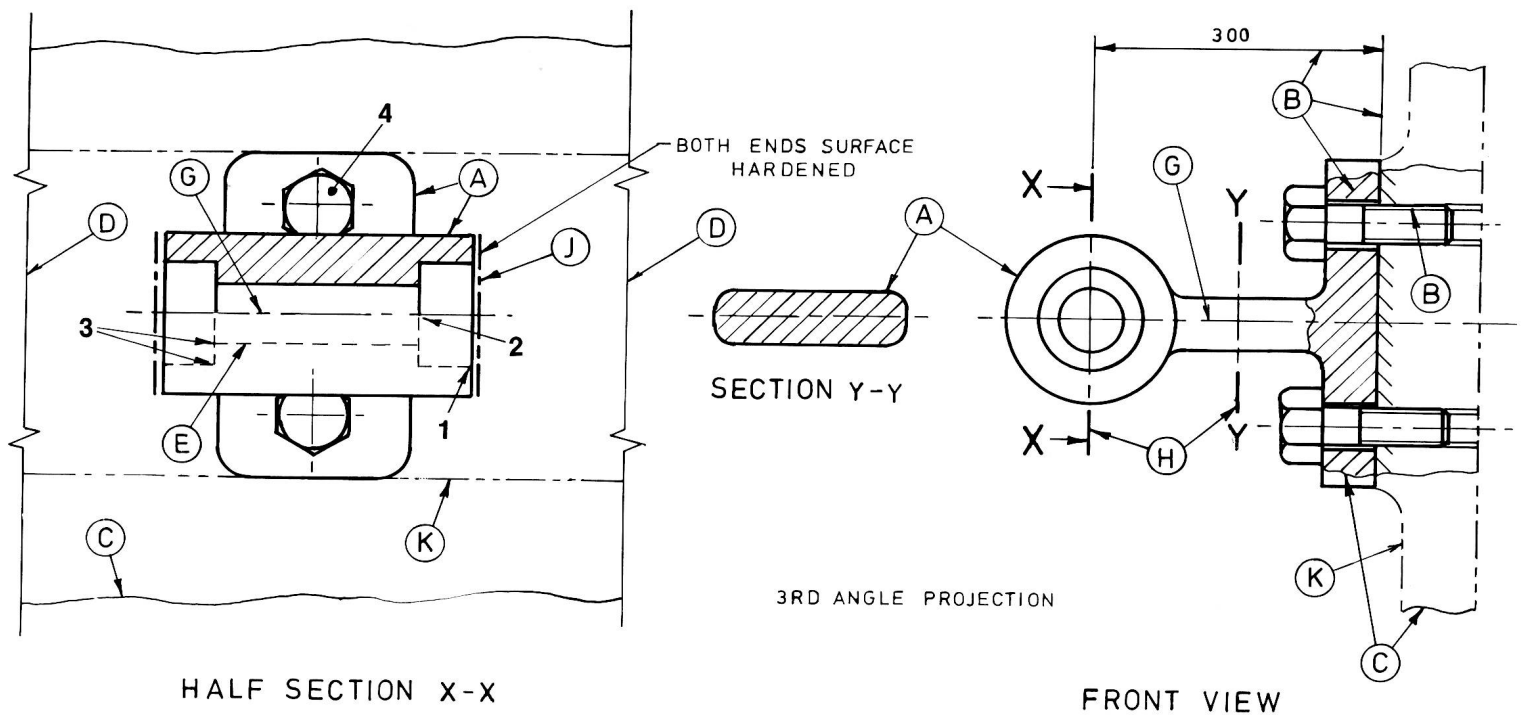


Fig. 1.1 Use of different types of line

minor diameters of male threads and major diameters of female threads (the latter are not illustrated).

3. The *short break line*, type C, is drawn freehand to terminate part views and sections as shown. It is also used to sketch the curved break section used on cylindrical members.
4. A *ruled zigzag line*, type D, is used for long break lines which extend a short distance beyond the outlines on which they terminate.
5. The *hidden outline line*, type E, represents internal features which cannot normally be seen.

A hidden outline should commence with a dash (1) except where it is a continuation of a visible outline (2), where there is a space first. Corners and junctions (3) should be formed by dashes.

6. The *centre line*, type G, denotes the axis of symmetrical views as well as the axis and centre lines of holes. Centre lines project a short distance past the outline. When produced further for use as dimension lines, they may revert to thin continuous (type B) lines. Type G lines may also be used to show the outline of material which has to be removed (not shown).
7. The *cutting plane of the section*, X-X, is represented by the type H line. Arrows are located at right angles to the thick ends of the line, and point to the direction in which the sectional view is being taken.

In the case of the removed section, Y-Y, which merely shows the cross-sectional shape of the member, it is immaterial which direction the view is taken from, and the arrows may be left off the cutting plane.

8. *Surfaces requiring special treatment* such as heat treatment or surface finish may be indicated with a type J line drawn parallel to the profile of the surface in question.
9. When drawing a component where it is necessary to show its relationship to an adjacent part, the latter is outlined using a type K line. Other uses of this type of line are to indicate extreme positions of movable parts, and to outline tooling profiles in relation to work set up in machine tools.

Scales

The scales recommended for use with the metric system are:

Full size	1:1
Enlargement	2:1, 5:1, 10:1
Reduction	1:2, 1:2.5, 1:5, 1:10

Use of scales

Engineering drawings may be prepared full size, enlarged or reduced in size. Whatever size of scale is used, it is important that it be noted in or near the title block.

Indication of scales

When more than one scale is used, they should be shown close to the view(s) to which they refer and a note in the title block should read “scales as shown”.

If a drawing has predominantly one scale, the main scale should be shown in the title block together with the notation “or as shown” to indicate the use of other scales elsewhere on the drawing.

Sometimes it is necessary to use different scales on the one view, for example on a structural steel truss where the cross-sections of members are drawn to a larger scale than the overall dimensions of the truss. Such variations are indicated on the drawing, for example:

Scales

Member cross-sections	1:10
Truss dimensions	1:100

If a particular scale requirement needs to be used on a drawing, it may be shown by one of the following methods:

1. a scale shown on the drawing, for example:



2. the word “scale” followed by the appropriate ratio, for example *SCALE 1:10*
3. the words “scale:none” in or near the title block, for example on pictorial drawings

Line thicknesses

Thicknesses for the various types of line are divided into specific groups according to the size of drawing sheet being used. Figure 1.2 shows the metric sheet size, the line type and thickness applicable in each case.

Sizes of drawing paper

Preferred sheet series

The Standards Association of Australia has recommended that paper sizes be based on the International Standardisation Organisation’s (ISO) “A” series, and these sizes are specified in AS 1100 Part 101. This series is particularly suitable for reduction onto 35 mm microfilm because the ratio of $1:\sqrt{2}$ is constant for the sides of the paper (Fig. 1.3(a)) and this ratio is also used for the microfilm frame.

Paper sizes are based on the A0 size, which has an area of 1 square metre. This allows paper weights to be expressed in grams per square metre.

The relationship between the various paper sizes is illustrated in Figure 1.3(a) and (b), where the application of the $1:\sqrt{2}$ side ratio can be seen. An A0 size sheet can be divided up evenly into the various other sizes simply by halving the sheet on the long side in each case. This is shown in Figure 1.3(c). The dimensions of metric sheets from size A0 to A4 are given in the table of Figure 1.3(d), together with appropriate border widths for each sheet size.

Non-preferred sheet series


The “B” series of sheet sizes provides for a range of sheets designated by B1, B2, B3, B4, etc., which are intermediate between the A sizes. The relationship of the B and A sizes is shown in Figure 1.3(b); B sizes are in broken outline.

Rolls


The standard widths of rolls are 860 mm and 610 mm. Drawing sheets can be cut off the roll to suit individual drawings.

Fig. 1.2 Line thicknesses for various sheet sizes

Sheet size	Line type and thickness (mm)									
	A	B	C	D	E	F	G	H	J	K
A0	0.7	0.35	0.35	0.35	0.35	0.5	0.35	0.35 0.7	0.7	0.35
A1	0.5	0.25	0.25	0.25	0.25	0.35	0.25	0.25 0.5	0.5	0.25
A2, A3, A4	0.35	0.18	0.18	0.18	0.18	0.25	0.18	0.18 0.35	0.35	0.18

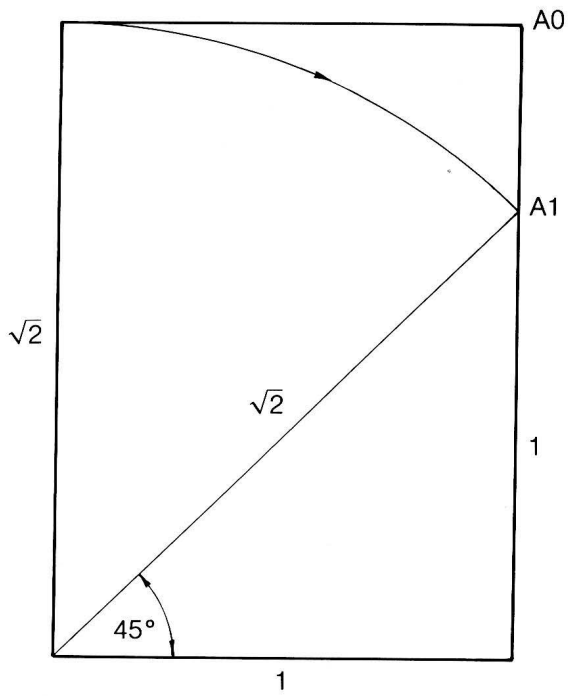


(a)

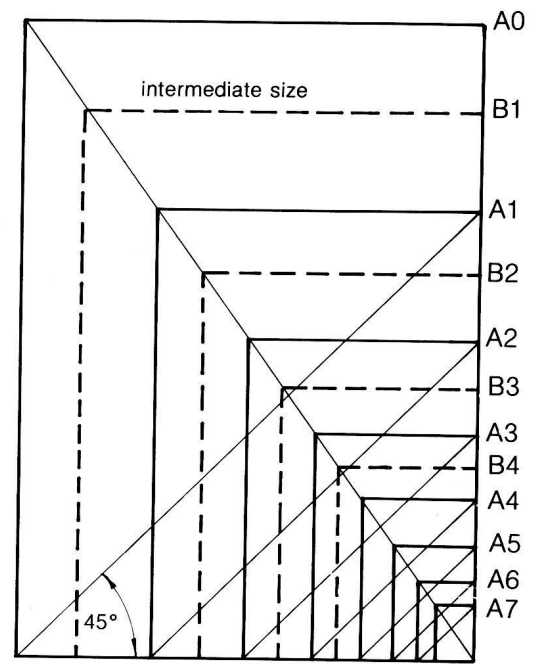

(b)


Note: The sides of metric drawing paper sheets are in the ratio of $1:\sqrt{2}$.
Area of the A0 size = 1 m^2

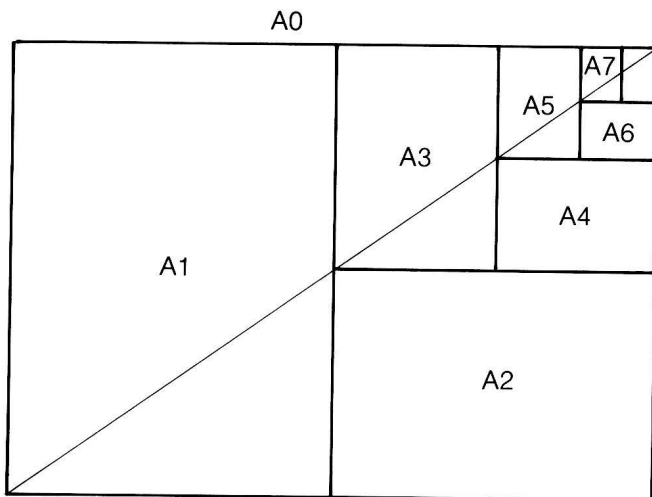

(c)

Drawing frames without a filing margin

Paper size	Border width (mm)		Dimensions of drawing frame (mm)
	both sizes	top and bottom	
	a	b	
A0	28	20	1133 × 801
A1	20	14	801 × 566
A2	14	10	566 × 400
A3	10	7	400 × 283
A4	7	5	283 × 200

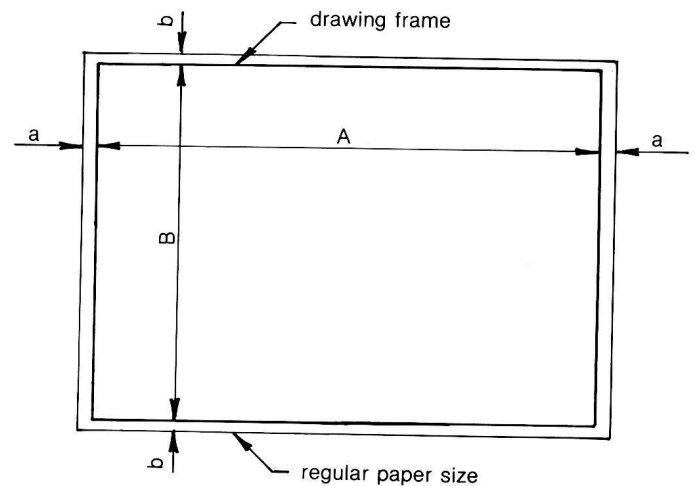

(d)

Fig. 1.3 Paper sizes

Layouts of drawing sheets

Standard layouts for drawing sheets of all sizes are given in AS 1100 Part 101. Figures 1.4 and 1.5 show typical layouts of A1 and A2 sheets, illustrating the paper size, drawing frame with microfilm camera alignment marks and zoning or grid referencing details. Additionally Figure 1.5 includes a parts list and a revisions table. The layout of Figure 1.4 is suitable for detail drawings, while that of Figure 1.5 is suitable for multidetail and assembly drawings.

Sheet frames (borderlines)

It is usual for each sheet to be provided with a drawing frame a short distance in from the edge of the paper. Drawing frames are standardised for the various sizes of paper, and Figure 1.3(d) details this information for frames without a filing margin.

Title block

The title block represents the general information source for a drawing. It is normally placed in the bottom right-hand corner of the drawing frame. Figure 1.6 illustrates title block dimensions for various sheet sizes, together with the type of information which should be contained in the title block and its location.

Material or parts list

When a drawing includes a number of parts on the one sheet, or when an assembly drawing of a number of parts is required, a tabulated list of the parts is attached to the top of the title block and against the right-hand drawing frame as shown in Figure 1.5.

The list should give the following information:

1. the item or part number
2. the part name
3. the quantity required
4. the material and its specification
5. the drawing number of each individual part
6. other information considered appropriate

A separate standard drawing sheet may be used to set out a parts list alone when it is desirable or when the list is very large. Such a list should be provided with a standard title block and a revisions table. For further details see AS 1100 Part 101.

Revisions table

A table of revisions is located normally in the upper right-hand corner of the drawing frame as shown in Figure 1.5.

The ability to effect revisions or modifications to existing drawings is an important requirement in all drawing and design offices. In many instances when only minor modifications are required, it is much easier to revise an existing drawing than to create a new one. However, such modifications must be tabulated to record existing details of the feature as well as the modification.

Each change should be identified by a symbol such as a letter or number placed close to the revision on the drawing. The letter or number may (but need not) be encircled on the drawing. Reference is made to the symbol in the tabulated details of the change (see Figs 6.1 and 6.2). Drawings so modified should be given a new issue number or letter situated in the title block adjacent to the drawing number.

If a particular modification affects the interchangeability of a part, the modified part should be allocated a new drawing number.

Zoning

Drawings may be divided into zones by a grid reference system based on numbers and letters as shown in Figures 1.4 and 1.5. Zoning is located inside the drawing frame.

The purpose of a grid reference system is to assist location of detail. It is particularly useful on large drawings.

Horizontal zones are designated by capital letters starting with A, reading from top to bottom. Vertical zones are designated by numbers reading from left to right.

The number of zones and widths of zone margins to be used on various sheet sizes are detailed in Table 1.3. Further use of zoning is shown in Figure 6.2, where a revision in the table designates a change of thread form (Whitworth to metric), and the reference C2 is a grid reference indicating the position on the sectional view of the thread in question, that is symbol Ⓐ.

Table 1.3 Details of grid references

Detail	Size of drawing				
	A0, B1	A1, B2	A2, B3	A3, B4	A4
number of vertical zones designated (1, 2, etc.)	16	12	8	6	4
number of horizontal zones designated (A, B, etc.)	12	8	6	4	4
width of margins for grid reference (mm)	10	7	7	5	5

DO NOT SCALE
DIMENSIONS IN MILLIMETRES

tolerances,
general
notes, etc.

MATERIAL

FINISH

FIRST USED

DRAWN

DATE

CKD

(name of firm)

(title)

CODE NO

DRG NO

SCALE

CHANGE NO

ITEM

CHANGE

CKD OK

DATE

frame size 801 x 566

paper size 841 x 594

1 2 3 4 5 6 7 8 9 10 11 12

A B C D E F G H

Fig. 1.4 Typical layout of a drawing sheet (suitable for detail drawings)