

INFORMATION CONTROL PROBLEMS IN MANUFACTURING TECHNOLOGY 1982

*Proceedings of the 4th IFAC/IFIP Symposium
Maryland, USA, 26-28 October 1982*

Edited by

D. E. HARDT

*Massachusetts Institute of Technology,
Cambridge, Massachusetts, USA*

Published for the
INTERNATIONAL FEDERATION OF AUTOMATIC CONTROL

by

PERGAMON PRESS

OXFORD · NEW YORK · TORONTO · SYDNEY · PARIS · FRANKFURT

U.K.	Pergamon Press Ltd., Headington Hill Hall, Oxford OX3 0BW, England
U.S.A.	Pergamon Press Inc., Maxwell House, Fairview Park, Elmsford, New York 10523, U.S.A.
CANADA	Pergamon Press Canada Ltd., Suite 104, 150 Consumers Road, Willowdale, Ontario M2J 1P9, Canada
AUSTRALIA	Pergamon Press (Aust.) Pty. Ltd., P.O. Box 544, Potts Point, N.S.W. 2011, Australia
FRANCE	Pergamon Press SARL, 24 rue des Ecoles, 75240 Paris, Cedex 05, France
FEDERAL REPUBLIC OF GERMANY	Pergamon Press GmbH, Hammerweg 6, D-6242 Kronberg-Taunus, Federal Republic of Germany

Copyright © 1983 IFAC

All Rights Reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means: electronic, electrostatic, magnetic tape, mechanical, photocopying, recording or otherwise, without permission in writing from the copyright holders.

First edition 1983

Library of Congress Cataloging in Publication Data

Main entry under title:
Information control problems in manufacturing technology
1982
(IFAC proceedings series)
Includes index.
1. Automation—Congresses. 2. Robots, Industrial—
Congresses. I. Hardt, D. E. (David E.) II. International
Federation of Automatic Control. III. International
Federation for Information Processing. IV. Series.
T59.5.I46 1983 629.8'3 83-11398

British Library Cataloguing in Publication Data

Information control problems in manufacturing
technology 1982.
— (IFAC proceedings series)
1. Automation — Congresses
2. Production engineering — Congresses
I. Hardt, D. E.
II. International Federation of Automatic Control
III. International Federation for Information Processing
670.42'7 T59.5
ISBN 0-08-029946-6

These proceedings were reproduced by means of the photo-offset process using the manuscripts supplied by the authors of the different papers. The manuscripts have been typed using different typewriters and typefaces. The lay-out, figures and tables of some papers did not agree completely with the standard requirements; consequently the reproduction does not display complete uniformity. To ensure rapid publication this discrepancy could not be changed; nor could the English be checked completely. Therefore, the readers are asked to excuse any deficiencies of this publication which may be due to the above mentioned reasons.

FOURTH IFAC/IFIP SYMPOSIUM ON INFORMATION CONTROL PROBLEMS IN MANUFACTURING TECHNOLOGY

Organized by

The National Bureau of Standards, U.S. Department of Commerce

Sponsored by

The International Federation of Automatic Control (IFAC) through
Technical Committee on Manufacturing Technology
Technical Committee on Theory

Co-sponsored by

The International Federation for Information Processing (IFIP) through
Technical Committee 5.3 on Discrete Manufacturing
The National Bureau of Standards, U.S. Department of Commerce

International Programme Committee

A. D'Auria, Italy
A. Bensoussan, France
Dr. Chalupa, Czechoslovakia
J. Hatvany, Hungary
M. Horváth, Hungary
W. Karner, Austria
I. Kato, Japan
D. Kochan, G.D.R.
D. McPherson, U.K.
L. Nemes, Hungary
J. L. Nevins (Chairman), U.S.A.
D. E. Okhotsimsky, U.S.S.R.
Y. Oshima, Japan
T. Pfeifer, F.R.G.
U. Rembold, F.R.G.
A. Romiti, Italy
C. Rosen, U.S.A.
T. Sata, Japan
J. Scrimgeour, Canada
J. Skakala, Czechoslovakia
J. Somló, Hungary
J. Thoma, Switzerland
D. R. Towill, U.K.
G. VanderBrug, U.S.A.
J. L. Remmerswaal, Netherlands
H. J. Warnecke, F.R.G.

National Organizing Committee

J. Albus (Chairman)
J. L. Nevins (Vice-Chairman)
M. Auman (Secretary)
S. R. Torrence
G. D. Pignone
K. F. J. Heinrich

PREFACE

The field of manufacturing has recently seen an explosion of activity, spurred on by the influence of inexpensive computing devices and the hope that through application of modern engineering science the operation of our factories can become more efficient in labor, material and energy use, while at the same time being responsive to the needs of the product consumers. The topics in this year's symposium are particularly appropriate to this theme.

Any significant advance in technology is founded upon adequate support of basic research. In Section 1 the various US government programs now sponsoring manufacturing related research are covered. This support covers the range from basic process physics research to general questions of artificial intelligence in the manufacturing environment.

At the heart of any manufacturing operation are the unit processes. Proper control of these processes is vital to achieving the autonomy that will eventually lead to automated manufacturing systems. In Section 2 these issues are addressed in terms of the general control problem involved and in the solution of specific processing problems. The cornerstone of process improvement is improved measurement and inspection methods. Section 3 presents examples of both on and off-line techniques that use novel methods of data acquisition and signal processing.

The growing role of industrial robots in advanced manufacturing systems is pointing up many problem areas in need of research. In Section 4 several of these areas are covered, including fundamental questions of manipulator design and control, and modelling of robot work environment. This reflects a realization that a major obstacle in the way of widespread use of robots is inadequate understanding of the mechanics of the task environment as well as the device itself.

The ability to integrate processes and robots into an efficient manufacturing system is truly the challenge of the future. In Section 5 a wide range of such problems are addressed including planning, scheduling, inventory, and decision systems. In Section 6 specific examples of fully automated manufacturing and assembly systems are presented, providing a measure of our current state of the art, and a window on the near future.

D.E. Hardt
Cambridge, Massachusetts

CONTENTS

SESSION 1 - GOVERNMENT ACTIVITIES

Defense Advanced Research Projects Agency Program - Intelligent Task Automation <i>E.C. Levinthal and E.C. van Reuth</i>	1
National Bureau of Standards' Automation Research Program <i>J.A. Simpson</i>	9
National Science Foundation - Manufacturing Engineering Program <i>W.M. Spurgeon</i>	15

SESSION 2 - MANUFACTURING PROCESS CONTROL

Manufacturing Process Control Specification with Functional Programming <i>C. Walter</i>	21
Mathematical Modelling and Control of Glass Forehearths <i>H. Bartlett and A.K. Kochhar</i>	27
Shape Control in Metal Bending Processes: The Model Measurement Tradeoff <i>D.E. Hardt</i>	35

SESSION 3 - MEASUREMENT TECHNIQUES

Inprocess Monitoring of Tool Breakage Based on Auto-regressive Model <i>N. Mohri, P. Bertók and T. Sata</i>	41
A Modular Test Equipment for the Inspection of Components in Mechanical Engineering <i>U. Schwerhoff</i>	47
Development of a Measuring Center on the Basis of Laser Light Intersection Method <i>H. Kampa, E. Noronha and L. Schreiber</i>	57

SESSION 4 - ROBOTICS

Loading and Unloading of Pallets Using Sensor-assisted Industrial Robots <i>H.-J. Warnecke and U. Ahrens</i>	63
Intelligent Control of a Multiactuator System <i>A. Meystel</i>	71

An Architecture for Real-time Sensory-interactive Control of Robots in a Manufacturing Facility <i>J.S. Albus, C.R. McLean, A.J. Barbera and M.L. Fitzgerald</i>	81
Modelling and Dynamic Analysis of Fluid Powered Robots <i>A. Romiti</i>	91
Controlling a Robot's Motion Speed by a Force-torque-sensor for Deburring Problems <i>G. Plank and G. Hirzinger</i>	97
Relaxed Path Tracking of Mechanical Manipulators by Parameter Estimation <i>J.Y.S. Luh</i>	103
Applying Stochastic Control Theory to Robot Sensing, Teaching, and Long Term Control <i>D.E. Whitney and E.F. Junkel</i>	109
SESSION 5 - PLANNING AND CONTROL	
The Role of Shop Floor Information in Manufacturing Control <i>G.L. Berry</i>	119
Computer Aided Process Planning for Single and Small Batch Production <i>K.-W. Prack</i>	125
Advances in Computer Software Packages for Manufacturing Control <i>A.K. Kochhar</i>	133
A Continuous Multi-echelon Inventory Problem <i>J.L. Menaldi and E. Rofman</i>	141
Optimal Control of a Production Line with Adjustable Service Rates <i>C. Cassandras and Y.C. Ho</i>	151
Decision Support Systems in Manufacturing: A New Approach to MRP <i>R.S. Ernst</i>	163
SESSION 6 - MANUFACTURING SYSTEMS	
A Real Time Control System for an Unaligned Flexible Manufacturing System <i>C. Dupont-Gatelmand</i>	169
A Framework for Modelling Discrete Event Systems for Automated Manufacturing Processes <i>M. Buchner</i>	177
Systems Approach Toward Implementation of a Multiassembly, Multilot-size, Multitechnology, Manufacturing Facility <i>D.A. White</i>	181
Flexible Production Systems in the Federal Republic of Germany <i>H.-J. Warnecke and H. Kampa</i>	191
The Virtual Manufacturing Cell <i>C.R. McLean, H.M. Bloom and T.H. Hopp</i>	207
Author Index	217

DEFENSE ADVANCED RESEARCH PROJECTS AGENCY PROGRAM — INTELLIGENT TASK AUTOMATION*

E. C. Levinthal and E. C. van Reuth

*Defense Sciences Office, Defense Advanced Research Projects Agency,
1400 Wilson Boulevard, Arlington, Virginia 22209, USA*

Abstract. The establishment of a science and technology base for many aspects of defense manufacturing and for adapting intelligent systems for complex military operational tasks is a cornerstone effort of advanced research with great national significance. This presentation provides an overview of the efforts of the Defense Advanced Research Projects Agency (DARPA) and the Air Force Wright Aeronautical Laboratories (AFWL) to plan and fund technology development for a substantial leap in Intelligent Task Automation (ITA). In addressing the needs for high productivity in manufacturing and robust applications to complex military tasks, the ITA program develops and integrates the generic technologies impacting, gripping, sensing, viewing, recognizing and understanding the environment, controlling manipulation, and intelligently providing command of the task.

Keywords. Artificial intelligence; assembling; cybernetics; manufacturing processes; process control; robots; sensors; system analysis; vision.

INTRODUCTION

Automation and automatic control of industrial processes has been permeated by robotic concepts, with the intent of providing greater industrial productivity for a "reindustrialization in America." Flamboyant feature articles in the popular press and some technical literature raise the expectation that future robots will be sophisticated, dexterous, adaptable and intelligent for a wide gamut of industrial, military and community operations -- on Earth and in space. Some caution is needed in estimating the time scale for those events. It is necessary to take into account the inertial forces that resist change in production methods, military operations and social behavior. These conservative forces limit the considerable support that is necessary to transfer what is possible in the laboratory into actual practice. DARPA's role is to remove some of the constraints so that these promises of the future are realized sooner and more fully.

Forecasts of unfolding robot technology were brought under rational considerations

in a recent "Overview" of robotics prepared by the National Bureau of Standards in conjunction with the National Aeronautics and Space Administration (Gevarter, 1982). In this report, the industrial needs and expectations are compared with directions being taken in research and development. Emerging in the foreseen evolution are hands with improved dexterity, the advanced control systems to support them, the vision and touch sensors to support the programmed control, and (later) a self-planning for intelligently supporting more general commands.

There are various tasks being considered for application of the expected intelligent capabilities in automation. In manufacturing they range from providing speed and economy in mass production assembly tasks to totally automating inventory and tool management in manufacturing. In military operations they include handling such complex tasks as reconnaissance and sweeping mine fields.

Getting the technology trends to provide the anticipated payoffs in automation of intelligent tasks is not straightforward. In terms of R&D economics, there are strenuous issues as to whether the advanced concepts and developments providing economical soundness of approach for manufacturing industries will sufficiently support a robust realization of the possibilities.

*This paper is also presented at the Fourth Meeting of the Coordinating Group on Modern Control Theory held at Oakland University, Rochester, Michigan, Oct 26-28, 1982, by Dr. E. C. van Reuth.

For instance, re-engineering the production methods within existing plants presents considerable economic competition for the robotic alternatives of installing flexible automation that copes with the unstructured environment. Manufacturing, for some time to come, may in the large remain permissive enough to support vision with structured light or to take advantage of 2-D images at fixed range -- in spite of the significant efforts in laboratories to secure the necessary technologies for understanding 3-D images with grey scale.

DARPA'S ROLE

As the central research organization for the Department of Defense, DARPA has a primary responsibility to support advanced research bearing on manufacturing because of the significant military value of the industrial base to military force structure. The present joint project linking DARPA with the Air Force Wright Aeronautical Laboratories (AFWAL) at Wright Patterson Air Force Base is in large part due to the challenge of meeting our nation's defense readiness goals through integrated computer-aided manufacturing (ICAM). Solving problems in the production base and developing tomorrow's new, more efficient manufacturing processes for the military hardware that will be required at the turn of the century is a vital support activity for DARPA.

In addition, the military services look to DARPA for the kind of technological advances that will extend and enhance operational capabilities in the combat environment. Presently, the military is looking into the implications of robotic technology and recognizes that today's technology, except for a few innovations in space, is dedicated to the assembly line and will remain there unless military needs are defined and developments funded.

For the near term, the military is expected to adopt the industrial robotic technologies for the same advantages found in manufacturing -- relieving personnel from hazardous tasks that demand time-critical effort. Handling ammunition resupply for self-propelled artillery or tanks has been considered as a direct application of the industrial robots. The continuous-path capabilities currently available appear suited to transferring ammunition from armored resupply vehicles to armored combat vehicles in the battlefield environment under possible threat of nuclear, biological, or chemical (NBC) actions. Essentially, these tasks call for the mobile mounting of an industrial robot for forward operations with the combat support forces.

But the military is especially interested in such broader applications of automation technologies as providing intelligent solutions to the Army's countermine problem. Concepts for solving this problem will go beyond the physical handling of material

and tools to include the Army's thinking about automating the "land rover." Where initially, remotely controlled mine clearing may be obtained by outfitting armored vehicles with a roller or mine plow and dispensing mine-clearing line charges, the eventual concepts will be intelligent about the overall countermine objective of establishing passage through a mined area. Instead of blindly clearing an intended area, many mines could be located by detecting the mine "footprint" with appropriate sensors and then marking the mine for avoidance. This intelligent approach would be based on an integrated automation of the roving vehicle, information handling, and physical handling of markers and cover material at a mine location.

In pointing out the enormous possible breadth of applications, it is intended not to thoroughly define the scope for using DARPA's resources, but rather to provide some insight to the range of choice being addressed. The Defense Sciences Office (DSO) has arrived at a focus in terms of the following concept for Intelligent Task Automation (ITA). While not excluding other interests, this focus is usefully providing a point of departure for prioritizing technological opportunities. The DSO program is coordinated with the efforts of the Information Processing Techniques Office (IPTO) of DARPA. IPTO's programs in artificial intelligence, information processing and computer technologies have an important impact on the ITA goals. The emphasis of DSO is presently on device subsystems with ITA capabilities and, in the future, on complete systems.

THE ITA CONCEPT

Among the technological advances in automation promising operational payoffs in either defense manufacturing or military operations are some potential advances that may not get bridged "naturally" by industrial support and incentives. As pointed out above, such tradeoffs in the industrial environment as using advanced robotic sensing versus engineering the robot's environment are not likely to arrive at the same critical demand that the military has for sensor driven control. Without the means to structure its environment, the military robot is confronted with obstacles, clutter, or unknown conditions; and its target will have highly variable character. Exploitation of the kinds of sensory controls outlined by D. Nitzan (1981) will be a military necessity; and it can be anticipated that the economic tradeoffs for industry will also eventually prove out the advantages of gaining flexibility with extensive sensing.

Simply, DARPA is recognizing that some technological opportunities are apparently missing investments because of the competition of attention to near-term engineering "problems." Technologies suitable for

military operations and the longer term goals for flexible manufacturing should not take advantage of structures for the environment. For example, the "bowl" feeder used in part-sorting in industrial assembly is unlikely to work out for an ammunition handler in the combat arena.

To obviate structured solutions, the research program places an emphasis on integrating vision, touch, and proximity sensing in process control. Sensor integration is apparently a prime target in the generally held consensus about gaining flexibility. For instance the NBS/NASA report (Gevarter 1982) notes such aims in its synthesis of needed research that drew on surveys and recommendations of conferences and workshops during the previous three years. The implied emphasis is on the integration as well as the generation of sensory data -- that is, on linking the computation of an understanding of the environment to the mechanical function.

In summary, the DARPA program in intelligent task automation seeks technology development representing a substantial leap forward from current capabilities with a focus on realizing automation in unstructured environment. The necessary intelligence to deal with both uncertainty of the environment and sophistication of the

intended task is specifically sought; and, the technological opportunities are expected in linking computation to mechanical function. The choice of scope in carrying out this objective is depicted in Figure 1 and described in the following sections of this paper.

END MANIPULATOR CONTROL

Available technologies present a broad gamut of limitations to achieving the "smart hands" called for in intelligent task automation. The needed dexterity entails rapid movement within the context of the work space, sensitive force control and fine movement enabling the "give" needed for inserting or mating parts, and a secure grasp that accomodates irregular objects. In contract to these needs, manipulators now primarily respond to position control, requiring that the robot's environment be engineered to the same high accuracy as the robot. Large and heavy structures are used to provide stiffness so that end point locations can be accurately inferred from joint angles. Thus, movements are slow and clumsy; and position accuracy is only as good as the accumulation of errors and the stiffness of the members. Designs for multifinger hands, suitable for grasping, have only

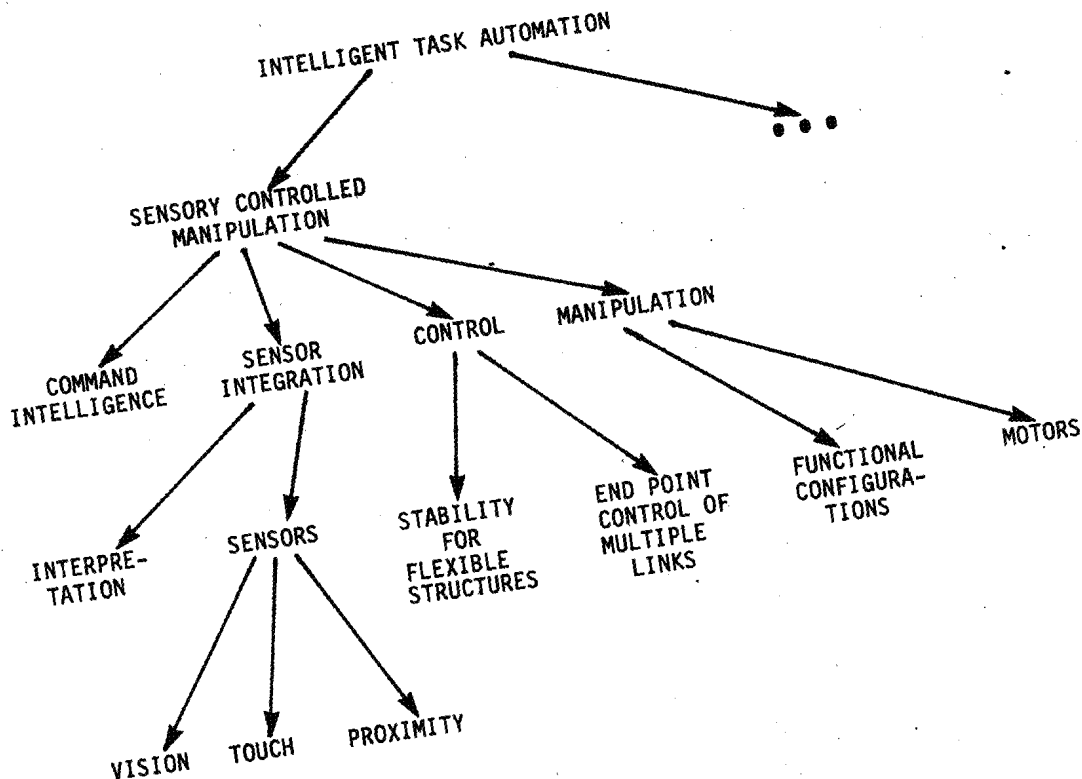


Figure 1. Couplings in DARPA Program

progressed to the ability to impart some limited motion by a heuristic combination of position and force-controlled fingers.

End point control of the manipulator and the individual fingers is the key to quick and precise actuation with lightweight structures. It is not yet available because robust (stable) control of the flexible structures has not been possible. When torque at one end of a series of links is based on feedback at the other end, any flexibility in the series makes the system inherently unstable. The techniques for stable control using end-point sensing are difficult to perfect. DARPA is now sponsoring research to directly address the integration of end point sensing with efficient stable control.

Specific attention is being turned to developing minimum time algorithms for slewing a flexible robotic arm through a large angle and then touching an object softly. That is, large impulsive "crashes" are to be avoided at the contact. To handle uncertainty in the target object's location, the research will incorporate end-point sensors such as optics, simple range finders, strain-gauge-equipped fingers and proximity sensors. New design concepts for arms are expected that will enable controlling higher terminal speeds without large impact forces even when there is uncertainty in the target's location. For example, mass distributions and flexibility will be varied in design trade-off studies.

Since a number of control modes must be involved, beginning with a large positional slew and ending with force control, methods are under investigation for smooth switching between control regimes while the mechanism is in motion. Initial objectives are to obtain the minimum-time algorithm for the "slew and touch" task. Further investigation of new arm designs will then take advantage of flexibility and distribution of arm control to best accomplish specific tasks.

As control techniques are developed that are tolerant of flexibility in a manipulator's mechanical structure, manipulators can be lightened and made faster. They will be safer to use, less prone to damage from collisions, require less power to run, and cost less to fabricate.

Control of force sensing fingers is also being explored under the current DARPA sponsorship. The control theory for coordinated motion of complex hands developed by Salisbury and Craig (1982) at Stanford University is being pursued. The theory specifies position and force control for the coordinated motions desired in such tasks as insertion where the goal is to minimize transverse forces while exerting a force in the intended direction of the insertion. Such tasks require force control throughout the relative motion and

necessitate sensing force and contact for feedback. Several architectures for position and force control of the multiloop mechanisms are being investigated. Preliminary results are appearing for the joint's torque subsystem. The physical dimensions of multi-fingered hands can be optimized on the basis of kinematic performance and the volume of grasp.

END SENSING

Force and contact sensing are also being explored for perceptual information. Components for force sensing are now being perfected that provide force measurements without friction and with little mass between sensor and load. At the command or strategy level in automation for a task, contact sensing provides the information for inference and estimation of geometric and dynamic properties of loads and the environment. Contact of individual fingers provides an estimate of local surface curvature and orientation, while several point contacts on several fingers provide gross orientation and curvature, e.g. fingers wrapped around a cylinder. Integrated data from fingers moving over a surface should reveal surface shape and dynamic properties of objects. As this research progresses, it is expected that strategies in hand control will evolve from experiments. Manipulation rules for re-orientation of grasped objects within the hand is one of the goals.

Integrating vision, range sensing and proximity sensing with the force and contact sensing is also being addressed. There are two levels of intended integration in the hierarchy of command and control -- at the command level for intelligent planning of the task actions, and at the control level for tracking.

Vision and image analysis are major research areas of the same magnitude as the intended focus on ITA (see, for instance, the survey by T. Binford, 1982). Results from vision research at leading institutions will be extensively drawn into the investigations of the command and control processes for ITA. Understanding how vision integrates with other sensors is the major objective, rather than the vision science per se. In particular, the research foundations for the use of models in sensory processing and interpretation are being explored in relation to representations of sensor estimates as geometric constraints.

RANGING AND 3-D SENSING

The practical benefits of ranging systems are beginning to be recognized. The data so gathered may be organized in depth maps, range images or like forms of 3-D "vision." Three-dimensional sensing has the same aim as other forms of computer

vision -- the higher level representation of the scene for purposes of comparison or recognition.

When a manipulator is on the move in dealing with a dynamic situation, it is necessary that it work with shape in its three dimensional space. The system should be capable of dealing with information acquired piecemeal from different vantage points. In fact, arrangements as have been tried by G. Agin (1979), among others, have shown the advantages of moving the sensors for the express purpose of obtaining more detailed information about the environment, such as seeing around occluding objects.

In research receiving support by DSO and IPTO jointly, a goal is set on classifying objects and determining their position and orientation with a ranging system. The activity is constructing a sensing system for generating light-stripe range data from multiple points of view and exploring concepts for gaining speed and accuracy in its operation. The data analysis developments are devising advantageous data structures for indexing the data and controlling image scanning. Generalized cylinders make up the low-level primitives in range data.

Identification of objects is sought on the basis of a preponderance of evidence from a matching process.

PROXIMITY SENSING IN ASSEMBLY

Of special interest is the role of proximity sensing in relation to the vision perspective at relatively long ranges and the perspective of touch sensors at contact. Short-range proximity and part-presence sensors can possibly overcome finger shadowing of a vision sensor and may enhance the ability to cope with unstructured or cluttered fields of view as occur with some assembly tasks. Operations involving the important assembly tasks of mating shafts into holes and bearings onto shafts without jamming can benefit from improvements in accuracy and speed. Current capabilities for such automation of assembly particularly lack ability to detect whether the assembly has proceeded properly.

A current objective of DARPA supported research is to demonstrate the capabilities of an acoustic sensing method based on phase monitoring as a means of detecting and controlling the performance of robotic assembly. Demonstration of shaft and bearing mating is intended. The research extends the technology of an automated positioning system based on phase monitoring of an array of acoustic sensors (microphones) as developed earlier by J. Tavormina

(1978) and S. Buckley at MIT. A manipulator was positioned by phase measurements from the acoustic sensor array, locking onto an objects position. All the necessary elements of a robot for assembly were demonstrated and later work at MIT showed that the sensor system could provide sufficient accuracy for commercial robots.

Now software is under development for detailed processing of the sensor data and for integrated control of a commercial robot. The software development is including the development of various algorithms to interpret phase information and couple control to the robot. The investigations are addressing "matrix" algorithms for interpreting phase information, and "proximity" algorithms to detect range and direction data in less structured environments. The goal of the proposed work is to demonstrate assembly of mating parts with response sufficiently rapid for industrial application (typically one second for shaft or bearing assembly).

MICRO-MINIATURE MOTORS

Mechanical concepts for the dexterous hand have made extensive progress. The jointly conceived "Stanford-JPL hand" has appeared prominently in the popular press, presumably by virtue of appearing to borrow heavily from nature by using tendon-like cables to actuate its fingers. Motors are mounted on the forearm to avoid encumbering the fingers. The tendon-like design allows three joints, on each of three fingers, with an overall geometry similar to that of a human hand. The nine degrees of freedom provide a firm basis for dexterity.

The "tendons" are cables and the electro-mechanical devices are conventional motors, nonetheless. Electric motors have a number of inherent problems which limit their effectiveness in application to fine-motion manipulators. Such limitations are addressed by another research effort currently supported by DARPA aimed at capitalizing on the lessons from biology about the structure and scale of natural muscle.

While electric motors are well suited for applications such as fans, disc drives, pumps, etc., their relatively low output torques require use of transmission systems for the high-torque and low-speed operation in a servosystem or robotic application. Transmission systems introduce a number of serious limitations on electric motors by compromising the dynamic performance. Dynamic characteristics of the motor such as armature inertia and damping are affected by the square of the transmission ratio. Transmissions also impact efficiency. For example, high performance planetary transmission, utilized extensively in today's aircraft industry, drop efficiencies into the range of only 50%.

A more desirable option for an electric actuator in a manipulator of the size of the human hand would be a motor which itself produces high torque at lower speed and eliminates the need for transmission systems altogether. However, even without transmissions, the high mass density of most magnetic materials and electric conductors, makes the power-to-weight ratio of electric motor systems extremely poor. When compared to hydraulic, pneumatic, and combustion based systems, electric motors are inferior by a full two orders of magnitude.

The lessons from biology are that natural muscles are fast, efficient, develop large forces (60 pounds per square inch), can be configured in a variety of sizes, and operate with an extremely low output impedance. Muscle has: (1) a large number of small force-generating elements mechanically connected in parallel; and (2) close proximity between force-generating elements (charges), taking advantage of inverse square laws to produce high local field strengths which increase the force generated per charge. Muscle thereby avoids the use of gross fields and employs instead a fine tapestry of field interactions locally commutated for the production of smooth output forces.

It is expected that the feasibility of field actuation systems with microgeometric structure can take advantage of the understanding of muscle. Already, the understanding of sensor based manipulation benefits from developments in institutions engaged in biomedical design. Artificial hand and hook designs are providing insight about grasping functions and structural configurations. Also, sensory feedback systems developed for prosthesis, including touch sensing and slip detection in multi-axis control, provide methodologies for complex geometry manipulators.

The goal of investigation into field actuation systems of the nature of a volumetric array of charges is to produce contractile or repulsive forces in high density systems matching biological muscle in efficiency, speed, specific force, packaging flexibility and low output impedance. Manufacturing is also being addressed, including the possibilities of adopting the precision techniques of the microcircuit industry. This research is anticipated to offer the possibility of order-of-magnitude improvements over today's electric, hydraulic and pneumatic devices in efficiency, power-to-weight ratio, and combined high-torque/low-speed characteristics.

THE INTEGRATION TECHNOLOGY

In addition to supporting the technology developments described above, DARPA has also linked with AFWAL in a substantial

single program to push the state-of-the-arts and force the technology breakthroughs so that a significant demonstration is conducted in intelligent task automation. The objective includes building individual components of the ITA subsystem, integrating the subsystem, and demonstrating applicability to defense manufacturing and flexibility for application to other military applications.

The Air Force context for the program is described by W. Kessler (1982) in terms of the Air Force's new initiatives in manufacturing sciences. The existing materials research and development, manufacturing technology programs, and ICAM activities are augmented by the initiatives. And, the emerging science related to manufacturing is substantially enhanced in order to provide the manufacturing technology base for the defense-related factory of the future. The ITA activity is envisioned as providing the cornerstone for payoffs in intelligent tasks of factories-of-the-future and military operations.

It is intended that the individual ITA technology R&D and the joint DARPA-AF ITA program be complementary. The ITA subsystem demonstration (being specifically defined in the first phase of the investigations) is intended to provide the focal point for developing the requisite integration of technologies. Pragmatic emphasis is placed on the technology to integrate advanced concepts, thereby complementing the attention to concept formulation in the individual areas of related technology. Advancing the technical means (gripping, sensing, viewing, recognizing and understanding the environment, controlling manipulation, and intelligently providing command of the task) within the same time frame as concept formulations means that the job of integration remains highly unknown with persistently uncertain requirements. All-in-all, the technological opportunity to integrate advanced technologies provides considerable leverage for the individual technical means.

SUMMARY

Specific opportunities for substantial technical advance and breakthrough are presented in a somewhat narrow field of automation pertaining to the higher order linkage of computation to mechanical function. The payoffs of pursuit of these opportunities are expected to amplify the ultimate operational applications of intelligent task automation at large.

REFERENCES

- Agin, G. (1979). Time control of a robot with a hand-held camera. Proc. 2nd USA-Japan Computer Conf., Tokyo, Japan, Aug 1975, p. 233.
- Binford, Thomas O. (1982). Survey of model-based image analysis systems. The International Journal of Robotics Research, Vol. 1, No. 1, Spring 1982, p. 18.
- Gevarter, William B. (1982). An Overview of Artificial Intelligence and Robotics, Volume II - Robotics, NBSIR 82-2479, National Bureau of Standards, Mar 1982.
- Kessler, William C. (1982). AFWAL-Manufacturing science program. IVth IFAC/IFIP Symposium on Information Control Problems in Manufacturing Technology, Held at NBS, Gaithersburg, MD, Oct 1982.
- Nitzan, David (1981). Assessment of robotic sensors. Proc 1st International Conf. on Robot Vision and Sensory Controls. Held at Stratford-upon-Avon, UK, Apr 1981, p. 1.
- Salisbury, Kenneth J., and John J. Craig (1982). Articulated hands: force control and kinematic issues. The International Journal of Robotics Research. Vol. 1, No. 1, Spring 1982, p. 4.
- Tavormina, Joseph and Shawn Buckley (1978). Automatic positioning and assembly under microcomputer control via acoustic phase monitoring. Transactions of the Society of Manufacturing Engineers, Vol. 6, 1978, p. 448.

NATIONAL BUREAU OF STANDARDS' AUTOMATION RESEARCH PROGRAM

J. A. Simpson

*Center for Manufacturing Engineering, National Engineering Laboratory,
National Bureau of Standards, US Department of Commerce, Washington, DC, USA*

Abstract. The program focuses on two problems lying close to the core mission of the National Bureau of Standards (NBS). First, how will the automated factory ensure that its products are dimensionally compatible with national standards. Second, what new national standards must be developed by the private sector to permit the increased productivity promised by automation to be realized by the free market economy. To explore these problems, an extremely flexible manufacturing research facility, with hierarchical, highly modular control architecture, is being installed. This facility is designed to be capable of emulating a wide variety of manufacturing cells typical of a small machine shop.

Keywords. Automation, machine tools, manufacturing processes, manufacturing research facility, quality control, standards.

INTRODUCTION

" . . . the functions of the Bureau shall consist in the custody of the standards used in scientific investigations, engineering, manufacturing, commerce and educational institutions with the standards adopted or recognized by the Government. . . . the testing and calibration of standard measuring apparatus; the solution of problems which arise in connection with standards; . . . "

Act of March 3, 1901,
31 Stat. 1449, Public
Law 56-177, 56th Congress

With the adoption of automated manufacturing, the National Bureau of Standards is, by its statutory charter, challenged to provide "testing and calibration of standard measuring apparatus" and deal with a number of "problems" which arise in connection with standards. The automation program is its response to that set of problems which arise in the mechanical manufacturing industry. The problems are of two different natures, the first dealing with quality control, and the second with interface standards between elements of the automated workstation, cell, or larger unit. Hence, the first deals with the manufacturer/customer marketplace, while the second deals with the machine builder/manufacturer relationship. The nature of both these marketplaces is set by the highly disaggregated character of the mechanical manufacturing industry. While this industry in the USA generates \$150 billion of national

product, it consists of almost 120,000 individual firms, 87% of which employ less than 50 persons. If the productivity enhancement offered by automation is to be realized, both these markets must operate in a free and equitable manner.

QUALITY CONTROL

In the manual shop the basis for quality control of dimensions, which is the principal parameter of interest in the mechanical industries, is provided by a system of measurements which tie to national standards by artifacts such as gauge blocks, ring and plug gauges, and more complex objects. These gauges are of the nature of idealized product and are tied to national standards by a pyramid of calibration activities which culminate in the calibration services of NBS (1980).

This system, developed over the past 80 years, is ill-suited to automated manufacturing since it is skilled-labor intensive and slow. The initial response of the NBS Automation Program in 1970 was to explore the possibilities of automatic test equipment. Research on the computer-controlled measuring machines (CMM) demonstrated their practicality, and by 1980 had developed the necessary calibration routines (Hocken and co-workers, 1977) needed for their widespread adoption (Porter and Mandl, 1980). The same work, however, showed that CMM are only suitable for a limited family of parts--medium-sized, complex, and prismatic in form.

The same work suggested that the technology existed to change the focus of quality control systems from the nature of the product to the behavior of the system. This point of view applied to the process of measurement had formed the basis of the Measurement Assurance Program (Cameron and Hailes, 1974), developed at NBS during the 1970's, and had its roots in earlier ideas of Demming and Juran.

Simply put, the concept acknowledges that any process, understood to the degree that permits a valid model to be created, working on a "feedstock" which is uniform, cannot change from making "good" product to making "bad" product without first changing some process parameter. Hence, if the state-of-the-process is monitored and such change inhibited from occurring, the product need never be inspected. Such a strategy, which has been called "Deterministic Metrology," is a natural extension of the monitoring necessary to ensure process integrity in an unmanned environment (anonymous, 1980). We have already demonstrated that correction for thermal drift, tool wear and breakage (Yee and Blomquist, 1982), as well as compensation for the geometric errors built into machine tools, are feasible.

A sizable part of the NBS program is devoted to extending this concept from the work station to the machining cell. This task entails consideration of fixturing and other auxiliary operations such as cleaning and deburring which may affect the final part quality. These operations will require robots with enhanced sensory perception; thus, we have active research on robot vision systems (Nagel and co-workers, 1979).

INTERFACE STANDARDS

The problem here is succinctly stated by Yoshikawa, Rathmill and Hatvany in their study for the Committee on Computer-Aided Manufacturing of the National Academy of Sciences:

"Unless great strides are made towards modularity and interface standardization in the near future, the level of expertise required to design and assemble large CAD/CAM systems could severely limit their proliferation."

The situation with respect to small CAD/CAM systems is even more bleak. There currently exists no way that one of the 100,000 small enterprises can incrementally implement a CAD/CAM system suitable for their needs. What is needed is a set of interface standards which makes the individual elements plug-to-plugin compatible and a control architecture which is sufficiently modular and extensible that the flexible manufacturing system (FMS) can be expanded or reconfigured without serious engineering effort.

The second major thrust of the NBS Automation Program is to determine if near-term future technology will make such a desirable situation possible, and if the private sector can be encouraged to develop standards which neither inhibit technical progress nor disrupt the competitive marketplace.

Over the past decade, the NBS Robotics Group, under Dr. James Albus, has developed a control architecture (Fig. 1), demonstrated on robots, which appears to have the necessary characteristics (Albus and co-workers, 1981). The system is hierarchical in nature and utilizes the concept of each level of control being of the nature of a "finite-state machine." Finite-state machines are logical modules whose output depends only on its present inputs and its present internal state. None of the logical modules admit any interrupts. Each starts a read cycle on a clock signal, computes, writes its output, and awaits the next clock signal. Thus, each module is a finite-state machine with the IF/THEN properties of an arithmetic function. All communication between modules is by common memory.

This architecture, although not without its disadvantages, has advantages we feel are decisive. By its nature, all levels can be implemented by distributed computers (Fig. 2) operating in a language best suited to that level since the only requirement for interface is to be able to read and write a given format. Moreover, the addition of a new state variable requires only a definition of where the newcomer is located in common memory. Even this information is needed only by the writing module and the one which needs the data. No other module need know or care when such a change is implemented. Thus, new computers, functions, or elements can be added with little affect on the original system.

Moreover, such an architecture is of the nature of an "expert system" in that as unforeseen circumstances arise, new IF/THEN statements can be added to deal with the situation, and the system becomes "smarter" and "smarter" as experience is gained.

Beyond these technical advantages is, we believe, an extremely important advantage that for lack of a better word I call "political." This advantage is the fact that all interfaces between elements consist simply of agreed-upon data formats. Each element needs only to be provided with a pre- and post-processor to go from what can remain a proprietary software system to another such system without the necessity of releasing data about the device's inner workings.

That such a standard can win private sector approval is demonstrated by our Initial Graphics Exchange Specification (IGES) (Brauner and colleagues, 1981). In this effort, under Air Force and National