

西南地区民用建筑配件图集

四川省基本建设委员会
贵州省基本建设委员会
云南省基本建设委员会

批准

木

窗

西南J701 (修订本)

四川省工业建筑设计院
四川省建筑勘测设计院 编制
重庆市设计院

西南地区建筑标准设计协作办公室出版

1976



玻 璃											窗 窗										
窗 窗		I		II		III		IV		V		I		II		III		IV		V	
窗 窗	窗 窗	600	1000	1200	1500	1800	2100	2400	3000	3300	窗 窗	窗 窗	600	1000	1200	1500	1800	2100	2400	3000	3300
3	B	无	□	□	□	□	□	□			7	S	无	□	□	□	□	□	□		
	么	□	□	□	□	□	□	□				么	□	□	□	□	□	□	□		
	上	□	□	□	□	□	□	□				上	□	□	□	□	□	□	□		
	么	□	□	□	□	□	□	□				么	□	□	□	□	□	□	□		
4	XB	下	□	□	□	□	□	□			8	XS	下	□	□	□	□	□	□		
	么	□	□	□	□	□	□	□				么	□	□	□	□	□	□	□		
	错				□	□	□	□				错				□	□	□	□		
	CB	么				□	□	□				CS	么					□	□		
5	DB	重	□	□	□	□	□	□			9	DS	重	□	□	□	□	□	□		
	叠			□	□	□	□	□	□			叠			□	□	□	□	□	□	
	双			□	□	□	□	□	□			双			□	□	□	□	□	□	
	SB	么				□	□	□	□	□			SS	么				□	□	□	□
6	F	中	900	1000	1500	1800	2100	2400	3000	3300	10	通	700	800	1200	1500	1800	2100	3000		
	悬											物									
	窗											窗									
	窗											窗									

注:

1. 表列立面窗高为洞口尺寸单位毫米。

2. 窗编号号“代号·窗高”窗高各取二位数字(分米)。

例如: SB-2421 即双么玻璃窗2400,高2100。

标准图

1974

类型总表

西南J701




页 2

注: 1. 表列立面窗高为洞口尺寸单位毫米。
 2. 窗编号为“代号-窗高”窗高各取二位数字(分米)。
 例如: SB-2421 即双么窗高2400,高2100。

标准图
1974

类型总表

西南J701
页 2



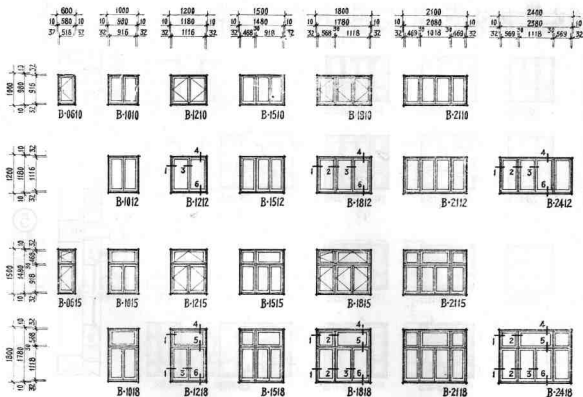


注：上悬窗坡度为 75°40'。

标准图
1974

B 无么 玻 窗
上么


西南J701
页 3

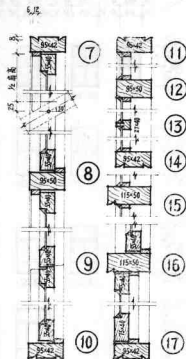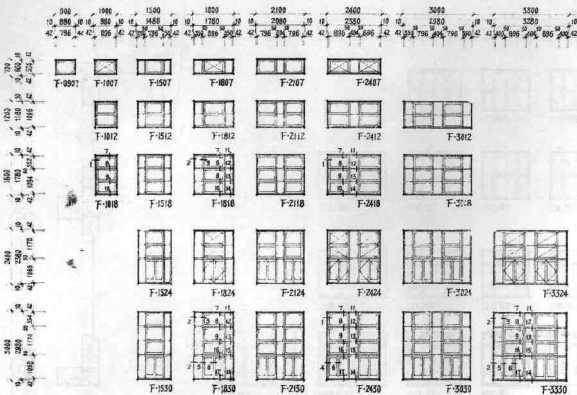

标准图
1974

F 中悬窗

面南J701
页 6



S-0610



S-1010



S-1210



S-1510



S-1810



S-2110



S-1012



S-1212



S-1512



S-1812



S-2112



S-2412



S-0615



S-1015



S-1215



S-1515



S-1815



S-2115



S-1018



S-1218



S-1518




S-1818



S-2118



S-2418



①


②

③

④



④



⑤






⑥

注：上悬窗高度为 75×40 (玻璃) 65×30 (纱窗)。




标准图
1974

S 无毛玻璃窗
上毛玻璃窗



西南J701
页 7

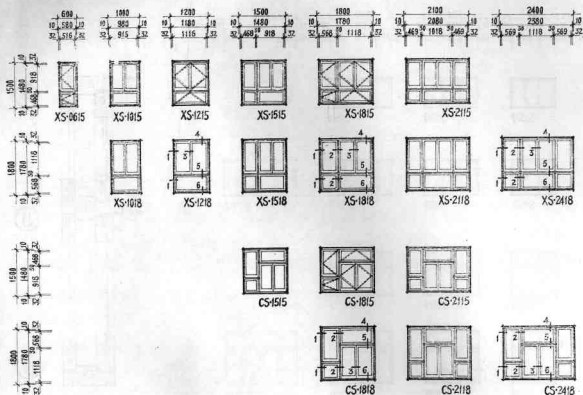

注: 上悬式窗边挺及平开窗下冒为 75×40 (现扇) 65×30 (纱扇)。


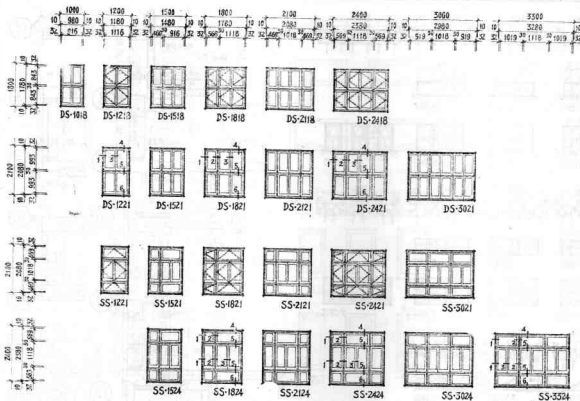


注：上悬式窗边批及平开窗下冒为75x40（铁窗），65x30（纱窗）。


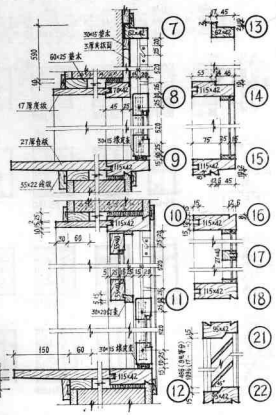
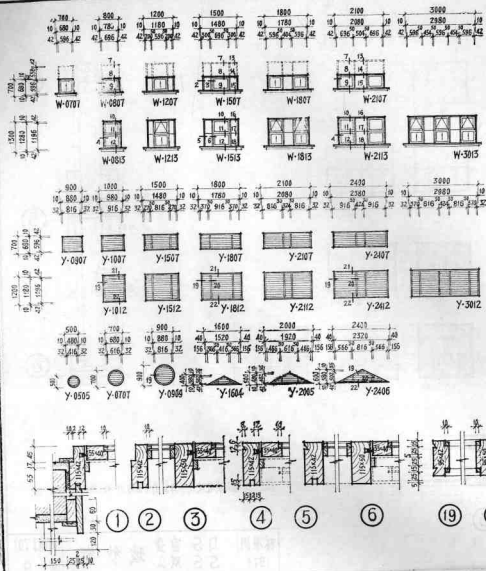


- 注: 1. 透物窗利用50翻板作推窗滑轴及挂钩, 须按图注尺寸安装。
 2. 透物窗推窗开启, 上推到顶端下落时, 上滑轴有微滑入挂钩推定, 必要时还可以再向内上悬移者。
 3. 有页窗有页木平挂影格接钩控制 ~ 10 。因形有页窗上下加三角木密缝防水。


标准图	W	透物窗	西南J701
1974	Y	有页窗	页 10




注: 1.立面右方标注为拟加总子尺寸,添加者由选用者注明。
2.扇一律加灯 125 成品铁三角灯于四角外面按槽嵌平。

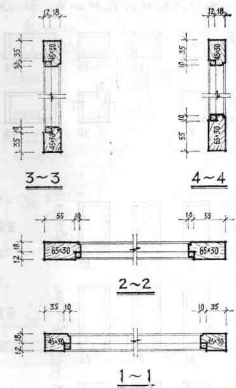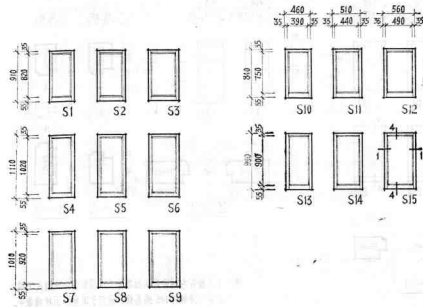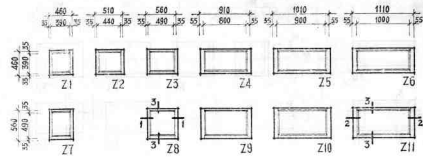

注：扇一律加钉100成品质三角钉于扇角外面挖槽嵌牢。

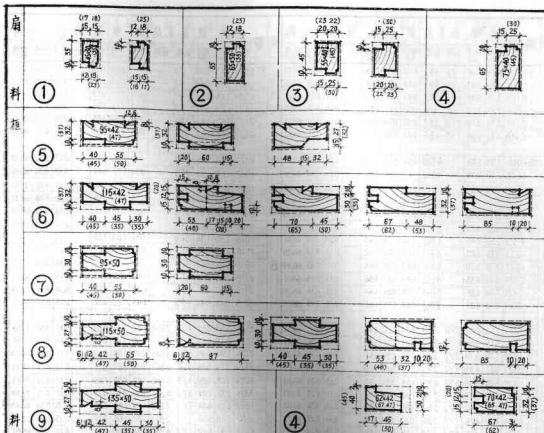

编号	名称	净重/料	毛重/料	备注	编号	名称	净重/料	毛重/料	备注
(1)	远条上, 2.5寸	45×50 (45×55)	50×55 (50×60)	含皮(2)	压条	10×10 (10×10)	*15×15 (15×15)	炒皮类猪脚	
(2)	远条上, 2.5寸	65×50 (65×55)	70×55 (70×60)	含皮(-)	灯条	25×10 (25×10)	*50×15 (50×15)	猪脚	
(3)	远条上, 2.5寸	55×40 (55×45)	*60×45 (60×50)	含皮(1)	线板	45×12 (45×12)	*50×15 (50×15)	“	
(4)	远条上, 2.5寸	75×40 (75×45)	*80×45 (80×50)	含皮(-)	“	55×22 (55×22)	*60×25 (60×25)	远条类猪脚	
(5)	外板	95×42 (95×47)	*100×45 (100×50)	远条上, 2.5寸	芯子	22×40 (22×45)	*35×45 (35×50)	中条类	
(6)	“	115×42 (115×47)	*120×45 (120×50)	远条上, 2.5寸	面页	95×10 (95×10)	100×15 (100×15)	百页类	
(7)	远条上, 2.5寸	95×50 (95×55)	*100×55 (100×60)	远条上, 2.5寸	灯条	33×20 (33×20)	35×25 (35×25)	远条类猪脚	
(8)	远条上, 2.5寸	115×50 (115×55)	*120×55 (120×60)	远条上, 2.5寸	板板	27 (27)	30 (30)	远条类猪脚	
(9)	远条上, 2.5寸	135×50 (135×55)	140×55 (140×60)	远条上, 2.5寸	度板	17 (17)	20 (20)	“	
(10)	外板	*80×42 (80×47)	*80×45 (80×50)	远条上, 2.5寸					

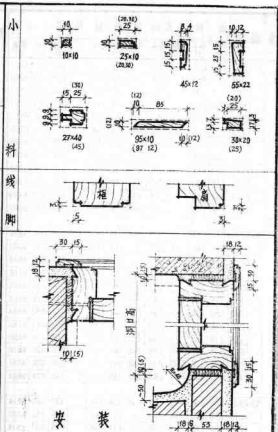

注: 1. 本图括号内数字为木材使用云南青松者用。
2. 表中注有“*”者为门窗通用杆。
3. 框角线脚形式和窗变更由选用人员行注明。
4. 外墙窗台顶作反水从窗下框受雨水侵蚀, 参见安装图。

标准图
1974

断面、安装

西南J701
页 13

页	编号	面积	基本扇	制 柜	制 扇	安 装	页	编号	面积	基本扇	制 柜	制 扇	安 装	页	编号	面积	基本扇	制 柜	制 扇	安 装
		洞口 M ²	樘子 M ²	么扇 M ²	窗扇 M ²	中樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²	小樘 M ²
	S-0610	0.60	0.57	B52	—	295	239	0.53	105	28.52										
	1010	100	0.96	2.851	—	221	213	0.42	0.63	62.19										
	1210	120	1.16	2.853	—	202	244	0.30	0.52	65.32										
	1510	150	1.45	3.851	0.45	184	272	0.37	0.41	67.07										
	1810	180	1.74	3.853	0.37	171	244	0.33	0.35	68.16										
	2110	210	2.04	2.853	0.64	162	262	0.32	0.29	69.75										
	1012	120	1.16	2.854	—	202	258	0.30	0.52	65.32										
	1212	144	1.39	2.856	—	184	229	0.35	0.43	67.36										
	1512	180	1.75	3.854	0.45	165	256	0.33	0.34	67.36										
	1812	216	2.10	3.856	0.37	152	227	0.30	0.29	67.36										
	2112	252	2.45	2.854	0.64	144	248	0.29	0.25	69.45										
	2412	288	2.81	4.856	0.56	137	226	0.27	0.21	70.45										
7	S-0615	0.90	0.86	Y22 B52	0.52	258	258	0.49	1.05	80.14										
	1015	150	1.45	Y24 2.851	—	183	265	0.37	0.62	67.27										
	1215	180	1.75	Y26 2.853	—	165	241	0.33	0.51	68.14										
	1515	225	2.19	Y21 3.851	0.97	146	272	0.32	0.41	67.32										
	1815	270	2.63	Y23 3.853	0.89	134	248	0.29	0.34	68.16										
	2115	315	3.08	Y23 2.853	1.16	125	268	0.28	0.29	69.75										
	1018	180	1.74	Y29 2.854	0.44	171	247	0.33	0.52	68.16										
	1218	216	2.10	Y211 2.856	—	152	223	0.30	0.43	67.42										
	1518	270	2.63	Y23 3.854	0.88	134	255	0.29	0.34	67.36										
	1818	324	3.17	Y23 3.856	0.80	121	229	0.26	0.28	68.16										
	2118	378	3.70	Y23 2.853	1.07	112	251	0.25	0.24	69.75										
	2418	432	4.24	Y23 4.856	0.99	106	232	0.23	0.21	70.45										
8	XS-0615	0.90	0.86	Y22 B52	0.52	258	258	0.49	1.05	80.14										
	1015	150	1.45	Y24 2.851	—	183	265	0.37	0.62	67.27										
	1215	180	1.75	Y26 2.853	—	165	241	0.33	0.51	68.14										
	1515	225	2.19	Y21 3.851	0.97	146	272	0.32	0.41	67.32										
	1815	270	2.63	Y23 3.853	0.89	134	248	0.29	0.34	68.16										
	2115	315	3.08	Y23 2.853	1.16	125	268	0.28	0.29	69.75										
	1018	180	1.74	Y29 2.854	0.44	171	247	0.33	0.52	68.16										
	1218	216	2.10	Y211 2.856	—	152	223	0.30	0.43	67.42										
	1518	270	2.63	Y23 3.854	0.88	134	255	0.29	0.34	67.36										
	1818	324	3.17	Y23 3.856	0.80	121	229	0.26	0.28	68.16										
	2118	378	3.70	Y23 2.853	1.07	112	251	0.25	0.24	69.75										
	2418	432	4.24	Y23 4.856	0.99	106	232	0.23	0.21	70.45										
9	SS-1221	252	2.45	Y26 2.853	0.74	144	236	0.30	0.48	65.31										
	1521	315	3.08	Y23 3.857	1.19	125	267	0.29	0.39	67.36										
	1821	378	3.70	Y23 3.859	1.11	112	245	0.26	0.32	67.36										
	2121	441	4.33	Y23 2.853	1.37	103	264	0.25	0.28	67.36										
	2421	504	4.95	Y23 2.853	1.27	097	250	0.24	0.24	67.36										
	3021	630	6.20	Y23 2.853	1.18	086	257	0.23	0.19	67.36										
	1524	360	3.52	Y23 3.854	1.08	113	253	0.27	0.34	67.36										
	1824	432	4.24	Y23 3.856	1.01	101	231	0.24	0.26	67.36										
	2124	504	4.95	Y23 2.853	1.28	093	252	0.23	0.24	67.36										
	2424	578	5.66	Y23 4.856	1.20	080	236	0.22	0.21	67.36										
	3024	720	7.09	Y23 2.853	1.09	079	242	0.21	0.17	67.36										
	3324	792	7.81	Y23 2.853	1.04	076	230	0.20	0.15	67.36										
10	W-0707	0.49	0.46	W1	—	434	139	1.26	1.30	54.35										
	0807	0.56	0.53	W2	—	451	132	1.15	1.13	56.60										
	1207	0.84	0.80	W1	223	376	0.80	0.82	0.81	61.25										
	1507	105	1.01	W2	176	333	0.69	0.67	0.65	65.16										
	1807	126	1.21	2W1	147	307	1.06	0.87	0.85	61.16										
	2107	147	1.41	2W2	126	290	0.99	0.86	0.84	63.83										
	0813	104	1.00	2W2	—	238	140	0.75	0.74	60.00										
	1213	156	1.51	2W1	118	211	0.85	0.81	0.81	64.90										
	1513	195	1.89	2W2	094	166	0.74	0.87	0.82	69.84										
	1813	234	2.28	4W1	078	168	1.12	0.70	0.70	64.91										
	2113	273	2.66	4W2	067	157	1.05	0.51	0.51	67.67										
	3013	390	3.81	6W1	096	145	1.01	0.46	0.46	67.72										
	Y-0907	0.63	0.60	—	237	1.83	0.40	1.00												
	1007	0.70	0.67	—	224	1.91	0.36	0.90												
	1507	1.05	1.01	073	194	1.84	0.32	0.59												
	1807	1.26	1.21	0.61	184	1.91	0.30	0.50												
	2107	147	1.41	0.53	177	1.89	0.28	0.43												
	2407	1.66	1.62	0.46	170	1.93	0.27	0.37												
	1012	120	1.16	—	167	209	0.28	0.52												
	1512	180	1.75	0.74	137	2.01	0.23	0.34												
	1812	216	2.10	0.62	127	2.08	0.21	0.29												
	2112	252	2.45	0.53	120	2.06	0.20	0.25												
	2412	288	2.81	0.46	114	2.10	0.19	0.21												
	3012	3.60	3.52	0.74	1.06	2.09	0.17	0.17												
	0505	0.20	0.18																	
	0707	0.39	0.36																	
	0909	0.64	0.61																	
	1604	0.32	0.29	1.10	497	1.52	0.86	2.07												
	2005	0.50	0.46	0.78	440	1.74	0.65	1.30												
	2406	0.72	0.67	0.63	331	1.94	0.55	0.90												

注: 1.表列材料均按100%材料利用量均按毛料断面面积和实际长度计算送料下料损耗。
2.页10W制柜小樘项内包括灯条(薄板)用料,安装费另项为按所用材料按240吨时计算。
3.基本扇扇数及规格,可对照原图页次。

使用云南有色金属材料制型制如下:

1.制柜小樘增加11%,消压板中樘。
2.制扇: - - - 1页10,7厚板增加20%

标准图
1974

玻璃窗
面积材料表

西南J701
页 15



定价：0.70元

此为试读, 需要完整PDF请访问: www.ertongbook.com