



# Materials Science Beyond the Basics

Ricky Peyret

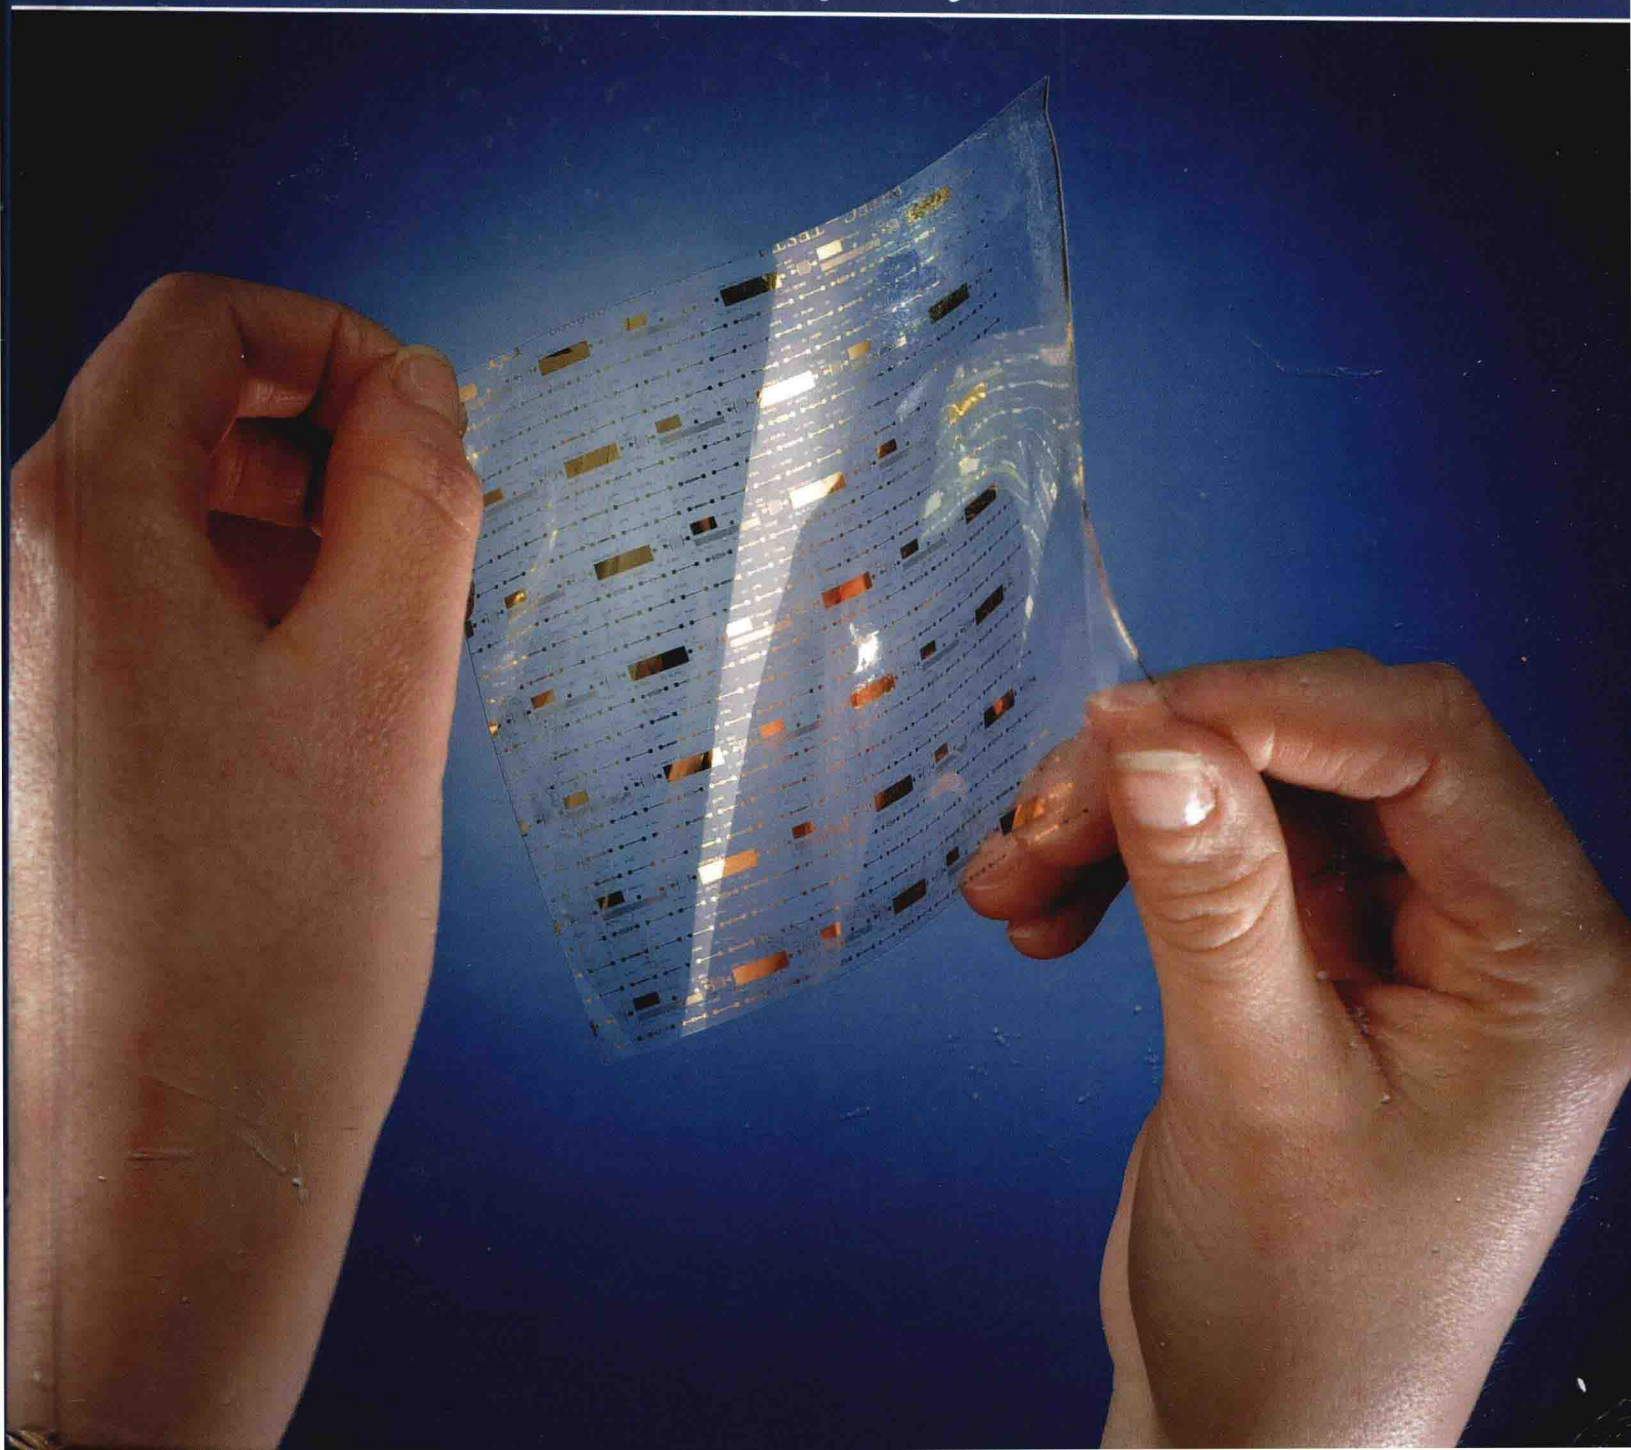

# Materials Science: Beyond the Basics

Edited by **Ricky Peyret**

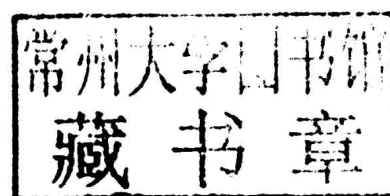

**NY**RESEARCH  
P R E S S

New York

Published by NY Research Press,  
23 West, 55th Street, Suite 816,  
New York, NY 10019, USA  
[www.nyresearchpress.com](http://www.nyresearchpress.com)

**Materials Science: Beyond the Basics**  
Edited by Ricky Peyret

© 2015 NY Research Press

International Standard Book Number: 978-1-63238-315-0 (Hardback)

This book contains information obtained from authentic and highly regarded sources. Copyright for all individual chapters remain with the respective authors as indicated. A wide variety of references are listed. Permission and sources are indicated; for detailed attributions, please refer to the permissions page. Reasonable efforts have been made to publish reliable data and information, but the authors, editors and publisher cannot assume any responsibility for the validity of all materials or the consequences of their use.

The publisher's policy is to use permanent paper from mills that operate a sustainable forestry policy. Furthermore, the publisher ensures that the text paper and cover boards used have met acceptable environmental accreditation standards.

**Trademark Notice:** Registered trademark of products or corporate names are used only for explanation and identification without intent to infringe.

Printed in China.

# **Materials Science: Beyond the Basics**



## Preface

Materials science is a field of study that is also commonly known as materials science and engineering or materials engineering. It is an interdisciplinary field which focuses on the study of matter and their properties. It also includes the discovery and design of new materials. This is a relatively new field of science which involves studying materials through the paradigm of, structure, performance, properties and synthesis performance. It is a discipline that incorporates the fields of physics and chemistry, and is at the vanguard of nanotechnology and nanoscience research. Material scientists study materials from an integrated point of view, usually searching for co-relations between structure and properties of a material as well as changes in it and its performance. Materials science has been gaining a foothold in recent years as a distinctive field of engineering and science. It is an essential component of fields such as forensic science and failure analysis. There are many problems in various scientific research projects that are caused by the limitations in the materials available and discovered as of yet. This ensures that there is a constant need for breakthroughs in this field as they are sure to have noteworthy and significant impacts on the future technology.

This book is an attempt to collate and compile the various branches of materials science and related research under one aegis. I am thankful to those who put in effort and hard work in the making of this book. I am also grateful to my friends and family who supported me in this endeavour.

**Editor**



# Contents

---

	<b>Preface</b>	<b>IX</b>
Chapter 1	<b>Stress and Strain Analysis of Functionally Graded Rectangular Plate with Exponentially Varying Properties</b> Amin Hadi, Abbas Rastgoo, A. R. Daneshmehr and Farshad Ehsani	<b>1</b>
Chapter 2	<b>Enhanced Photocatalytic Degradation of Methylene Blue Using ZnFe<sub>2</sub>O<sub>4</sub>/MWCNT Composite Synthesized by Hydrothermal Method</b> Sonal Singhal, Rimi Sharma, Charanjit Singh and S. Bansal	<b>8</b>
Chapter 3	<b>Effect of Heating Mode and Copper Content on the Densification of W-Cu Alloys</b> Avijit Mondal, Anish Upadhyaya and Dinesh Agrawal	<b>14</b>
Chapter 4	<b>Thermal Study of Anhydrides Cured Tetrafunctional Cardo Epoxy Resin</b> Jignesh P. Patel and Parsotam H. Parsania	<b>21</b>
Chapter 5	<b>Effect of Process Parameter Optimization in Reducing Sintering Temperature in the Synthesis and Characterization of Ba(Zn<sub>1/3</sub>Nb<sub>2/3</sub>)O<sub>3</sub></b> P. K. Bajpai and K. N. Singh	<b>27</b>
Chapter 6	<b>Electrochemical Impedance Spectroscopy and Potentiodynamic Polarization Analysis on Anticorrosive Activity of Thiophene-2-Carbaldehyde Derivative in Acid Medium</b> Nimmy Kuriakose, Joby Thomas Kakkassery, Vinod P. Raphael and Shaju K. Shanmughan	<b>34</b>
Chapter 7	<b>Growth and Characterization of Agar Gel Grown Brushite Crystals</b> V. B. Suryawanshi and R. T. Chaudhari	<b>40</b>
Chapter 8	<b>Analysis of Free Edge Stresses in Composite Laminates Using Higher Order Theories</b> Hamidreza Yazdani Sarvestani and Ali Naghashpour	<b>46</b>
Chapter 9	<b>Microstructure Properties of Rapidly Solidified Al-Zn-Mg-Cu Alloys</b> Emad M. Ahmed	<b>61</b>



Chapter 10	<b>Water-Soluble and Biodegradable Pectin-Grafted Polyacrylamide and Pectin-Grafted Polyacrylic Acid: Electrochemical Investigation of Corrosion-Inhibition Behaviour on Mild Steel in 3.5% NaCl Media</b> R. Geethanjali, A. Ali Fathima Sabirneeza and S. Subhashini	67
Chapter 11	<b>Effect of <math>\text{Eu}^{3+}</math> Concentration on Luminescence Studies of <math>\text{Y}_4\text{Al}_2\text{O}_9</math> Phosphor</b> Vikas Dubey, Sadhana Agrawal and Jagjeet Kaur	76
Chapter 12	<b>Variations of Optical and Structural Properties of <math>\text{Co}_x\text{O}_y</math> Thin Films with Thermal Treatment</b> A. B. C. Ekwealor, S. U. Offiah, S. C. Ezugwu and F. I. Ezema	84
Chapter 13	<b>Ytterbium Doped Gadolinium Oxide (<math>\text{Gd}_2\text{O}_3:\text{Yb}^{3+}</math>) Phosphor: Topology, Morphology, and Luminescence Behaviour</b> Raunak Kumar Tamrakar, Durga Prasad Bisen, Chandra Shekher Robinson, Ishwar Prasad Sahu and Nameeta Brahme	89
Chapter 14	<b>Biosynthesis, Characterization, and Antidermatophytic Activity of Silver Nanoparticles Using Raamphal Plant (<i>Annona reticulata</i>) Aqueous Leaves Extract</b> P. Shivakumar Singh and G. M. Vidyasagar	96
Chapter 15	<b>Hot Corrosion Behaviour of Detonation Gun Sprayed <math>\text{Al}_2\text{O}_3</math>-40<math>\text{TiO}_2</math> Coating on Nickel Based Superalloys at 900°C</b> N. K. Mishra, Naveen Kumar and S. B. Mishra	101
Chapter 16	<b>Adsorbent Ability of Treated <i>Peganum harmala</i>-L Seeds for the Removal of Ni (II) from Aqueous Solutions: Kinetic, Equilibrium and Thermodynamic Studies</b> Maryam Ghasemi, Nahid Ghasemi and Javad Azimi-Amin	106
Chapter 17	<b>Optimum Material Gradient for Functionally Graded Rectangular Plate with the Finite Element Method</b> Wasim M. K. Helal and Dongyan Shi	115
Chapter 18	<b>Studies on Adsorption of DNA on Functional Ultrathin Films of Cationic Surfactant</b> Monika Poonia, Anagh Pathak, V. Manjuladevi and R. K. Gupta	122
Chapter 19	<b>Visible Light Photocatalytic Activity of <math>\text{CeO}_2</math>-<math>\text{ZnO}</math>-<math>\text{TiO}_2</math> Composites for the Degradation of Rhodamine B</b> S. Prabhu, T. Viswanathan, K. Jothivenkatachalam and K. Jeganathan	127
Chapter 20	<b>The Role of Polarons in Cuprates <math>\text{H}i\text{-}T_c</math> Superconductivity</b> M. I. Umo	137

Chapter 21	<b>Preparation of Samarium Doped Calcium Hydrogen Phosphate and Study of Its Density and Thermal and Dielectric Characteristics</b> K. K. Bamzai, Goldy Slathia, Bindu Raina, Rashmi Gupta, Seema Verma, Shivani Suri and Vishal Singh	144
Chapter 22	<b>Temperature Dependence of Thermoelastic Properties for NaCl Crystal</b> Kuldeep Kholiya and Jeewan Chandra	152
Chapter 23	<b>Influence of Rare Earth Doping on Microstructure and Luminescence Behaviour of Sodium Sulphate</b> Y. S. Vidya and B. N. Lakshminarasappa	155
Chapter 24	<b>Comparison of the Strength of Binary Dislocation Junctions in fcc Crystals</b> Naisheel Verdhan and Rajeev Kapoor	163
Chapter 25	<b>Second Harmonic of Laser Radiation for IR-Range in Mixed <math>\text{AgGa}_{0.6}\text{In}_{0.4}\text{Se}_2</math> Crystals</b> Rena J. Kasumova	168
Chapter 26	<b>Kinetics of Thermolysis of Nickel(II) Perchlorate Complex with n-Propylamine</b> Chandra Prakash Singh and Abhishek Singh	173
Chapter 27	<b>A Promising Orange-Red Nanocrystalline Potassium Lanthanum Orthophosphate for White Light-Emitting Diodes</b> Palvi Gupta, A. K. Bedyal, Vinay Kumar, Y. Khajuria, O. M. Ntwaeaborwa and H. C. Swart	178

Permissions

List of Contributors



# Stress and Strain Analysis of Functionally Graded Rectangular Plate with Exponentially Varying Properties

Amin Hadi,<sup>1</sup> Abbas Rastgoo,<sup>1</sup> A. R. Daneshmehr,<sup>1</sup> and Farshad Ehsani<sup>2</sup>

<sup>1</sup> Mechanical Engineering Department, University of Tehran, Tehran, Iran

<sup>2</sup> Department of Mechanical Engineering, Yasooj Branch, Islamic Azad University, Yasooj, Iran

Correspondence should be addressed to Amin Hadi; amin.hadi@live.com

Academic Editors: S. Banerjee and D. L. Sales

The bending of rectangular plate made of functionally graded material (FGM) is investigated by using three-dimensional elasticity theory. The governing equations obtained here are solved with static analysis considering the types of plates, which properties varying exponentially along  $z$  direction. The value of Poisson's ratio has been taken as a constant. The influence of different functionally graded variation on the stress and displacement fields was studied through a numerical example. The exact solution shows that the graded material properties have significant effects on the mechanical behavior of the plate.

## 1. Introduction

Recently, a new category of composite materials known as functionally graded materials (FGMs) has attracted the interest of many researchers. The FGMs are heterogeneous composite materials in which the mechanical properties vary continuously in certain direction. FGMs are used in many engineering applications such as aviation, rocketry, missiles, chemical, aerospace, and mechanical industries. Therefore, composites that are made of FGMs were considerably attractive in recent years.

Several studies have been performed to analyze the behavior of functionally graded beam, plates, and shells. Hadi et al. [1, 2] studied an Euler-Bernoulli and Timoshenko beam made of functionally graded material subjected to a transverse loading at which Young's modulus of the beam varies by specific function. Reddy [3] has analyzed the static behavior of functionally graded rectangular plates based on his third-order shear deformation plate theory. Cheng and Batra [4] have related the deflections of a simple supported functionally graded polygonal plate given by the first-order shear deformation theory and a third-order shear deformation theory to an equivalent homogeneous Kirchhoff plate. Cheng and Batra [5] also presented results for the buckling and steady state vibrations of a simple supported

functionally graded polygonal plate based on Reddy's plate theory. Loy et al. [6] studied the vibration of functionally graded cylindrical shells by using Love's shell theory.

Analytical 3D solutions for plates are useful because provided benchmark results to assess the accuracy of various 2D plate theories and finite element formulations. Cheng and Batra [7] used the method of asymptotic expansion to study the 3D thermoelastic deformations of a functionally graded elliptic plate. Recently, Vel and Batra [8] have presented an exact 3D solution for the thermoelastic deformation of functionally graded simple supported plates of finite dimensions. Reiter et al. [9] performed detailed finite element studies of discrete models containing simulated particulate and skeletal microstructures and compared the results with those that are computed from homogenized models in which effective properties were derived by the Mori-Tanaka and the self-consistent methods.

Tanigawa [10] used a layerwise model to solve a one-dimensional transient heat conduction problem and the associated thermal stress problem of an inhomogeneous plate. He further formulated the optimization problem of the material composition to reduce the thermal stress distribution. Tanaka et al. [11, 12] have designed FGM property profiles by using sensitivity and optimization methods based on the reduction of thermal stresses. Jin and Noda [13] used the minimization

of thermal stress intensity for a crack in a metal-ceramic functionally graded material as a criterion for optimizing material property variation. In the same context, also were studied both the steady state [14] and the transient [15] heat conduction problems by them, but neglected the thermomechanical coupling (see also [16, 17]).

The response of functionally graded ceramic-metal plates has been investigated by Praveen and Reddy [18] with using a plate finite element that accounts for the transversal shear strains, rotatory inertia, and moderately large rotations in von Kármán sense. Reddy and Chin [19] have studied the dynamic thermoelastic response of functionally graded cylinders and plates. Najafizadeh and Eslami [20] presented the buckling analysis of radially loaded solid circular plate that is made of functionally graded material.

In this paper, an exact solution bending of rectangular plate made of functionally graded material (exponential form along  $z$  direction) subjected to top and bottom pressures  $P_T$  and  $P_B$ , respectively, is investigated by using three-dimensional elasticity theory.

## 2. Analysis

The equilibrium of a weightless homogeneous transversally isotropic elastic FGM plate is considered. The geometry of the elastic FGM plate in relation to the coordinate axes is shown in Figure 1.

The plate is assumed under the action of top and bottom pressures  $P_T$  and  $P_B$ , respectively,

$$\begin{aligned} P_T &= P_{T0} \sin \frac{\pi x}{a} \sin \frac{\pi y}{b}, \\ P_B &= P_{B0} \sin \frac{\pi x}{a} \sin \frac{\pi y}{b}, \end{aligned} \quad (1)$$

where  $P_{T0}$  and  $P_{B0}$  are top and bottom pressures in  $x = a/2$ ,  $y = b/2$ .

In order to account for the changing material properties along the  $z$  direction, an exponential relationship is used as follows:

$$E(z) = E_i e^{n(z/h)}. \quad (2)$$

Here  $E_i$  is the module of elasticity at  $z = 0$ , and  $n$  is the inhomogeneity constants determined empirically. Equilibrium equations in three dimensions are defined as follows:

$$\begin{aligned} \frac{\partial \sigma_x}{\partial x} + \frac{\partial \tau_{xy}}{\partial y} + \frac{\partial \tau_{xz}}{\partial z} &= 0, \\ \frac{\partial \tau_{xy}}{\partial x} + \frac{\partial \sigma_y}{\partial y} + \frac{\partial \tau_{yz}}{\partial z} &= 0, \\ \frac{\partial \tau_{xz}}{\partial x} + \frac{\partial \tau_{yz}}{\partial y} + \frac{\partial \sigma_z}{\partial z} &= 0, \end{aligned} \quad (3)$$

where  $\sigma_x$ ,  $\sigma_y$ , and  $\sigma_z$  are normal stress components in  $x$ ,  $y$ , and  $z$  direction, respectively.  $\tau_{xy}$ ,  $\tau_{yz}$ , and  $\tau_{xz}$  are shear stresses components.

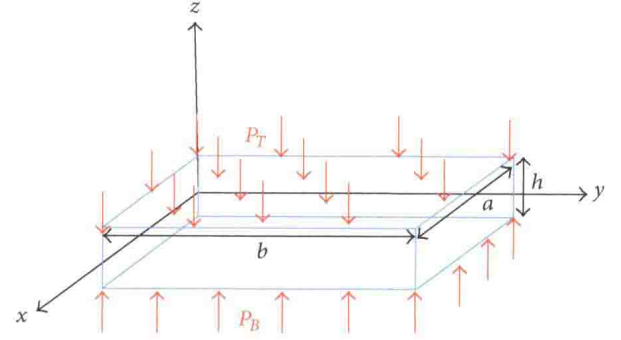


FIGURE 1: Geometry and boundary conditions of the plate.

The displacement in the  $x$ ,  $y$ , and  $z$  directions is denoted by  $u$ ,  $v$ , and  $w$ , respectively, six strain components can be expressed as

$$\begin{bmatrix} \epsilon_x & \lambda_{xy} & \lambda_{xz} \\ \lambda_{xy} & \epsilon_y & \lambda_{yz} \\ \lambda_{xz} & \lambda_{yz} & \epsilon_z \end{bmatrix} = \begin{bmatrix} \frac{du}{dx} & \frac{1}{2} \left( \frac{du}{dy} + \frac{dv}{dx} \right) & \frac{1}{2} \left( \frac{du}{dz} + \frac{dw}{dx} \right) \\ \frac{1}{2} \left( \frac{du}{dy} + \frac{dv}{dx} \right) & \frac{dv}{dy} & \frac{1}{2} \left( \frac{dv}{dz} + \frac{dw}{dy} \right) \\ \frac{1}{2} \left( \frac{du}{dz} + \frac{dw}{dx} \right) & \frac{1}{2} \left( \frac{dv}{dz} + \frac{dw}{dy} \right) & \frac{dw}{dz} \end{bmatrix}, \quad (4)$$

where  $\epsilon_x$ ,  $\epsilon_y$ , and  $\epsilon_z$  are normal strain components in  $x$ ,  $y$ , and  $z$  directions, respectively.  $\lambda_{xy}$ ,  $\lambda_{yz}$ , and  $\lambda_{xz}$  are shear strain components.

The stress-strain relations are

$$\begin{aligned} \sigma_x &= \frac{E(z)}{(1-2\nu)(1+\nu)} \left[ (1-\nu) \frac{\partial u}{\partial x} + \nu \left( \frac{\partial v}{\partial y} + \frac{\partial w}{\partial z} \right) \right], \\ \sigma_y &= \frac{E(z)}{(1-2\nu)(1+\nu)} \left[ (1-\nu) \frac{\partial v}{\partial y} + \nu \left( \frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} \right) \right], \\ \sigma_z &= \frac{E(z)}{(1-2\nu)(1+\nu)} \left[ (1-\nu) \frac{\partial w}{\partial z} + \nu \left( \frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} \right) \right], \end{aligned} \quad (5)$$

$$\begin{aligned} \tau_{xy} &= G(z) \left[ \frac{\partial u}{\partial y} + \frac{\partial v}{\partial x} \right], \\ \tau_{xz} &= G(z) \left[ \frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right], \\ \tau_{yz} &= G(z) \left[ \frac{\partial v}{\partial z} + \frac{\partial w}{\partial y} \right], \end{aligned} \quad (6)$$

where  $G(z) = E(z)/2(1+\nu)$  is shear modulus, with  $E(z)$  the modulus of elasticity and  $\nu$  Poisson's ratio. The value of Poisson's ratio has been taken as constant.



The boundary conditions of the problem are the following. Along the sides of the plate, we have

$$\begin{aligned} x = 0, \quad a \longrightarrow w = 0, \quad \sigma_x = 0, \\ x = 0, \quad b \longrightarrow w = 0, \quad \sigma_y = 0 \end{aligned} \quad (7)$$

the boundary conditions on the plate faces are as below:

$$\begin{aligned} z = \frac{h}{2} \longrightarrow \sigma_z = P_T, \quad \tau_{xz} = \tau_{yz} = 0, \\ z = -\frac{h}{2} \longrightarrow \sigma_z = P_B, \quad \tau_{xz} = \tau_{yz} = 0. \end{aligned} \quad (8)$$

By the displacement field below, the boundary conditions (7) are satisfied:

$$\begin{aligned} u = u(x, y, z) = U(z) \cos \frac{\pi x}{a} \sin \frac{\pi y}{b}, \\ v = v(x, y, z) = V(z) \sin \frac{\pi x}{a} \cos \frac{\pi y}{b}, \\ w = w(x, y, z) = W(z) \sin \frac{\pi x}{a} \sin \frac{\pi y}{b}. \end{aligned} \quad (9)$$

Substituting (9) into (5) and the resulting expressions for stress components into equilibrium equations (3), we see that the equilibrium equation is expressed as system of second-order ordinary differential equations:

$$\begin{aligned} \frac{d^2 U}{dz^2} + \frac{n}{h} \frac{dU}{dz} + J_1 U + J_3 V - \frac{b}{\pi} J_3 \frac{dW}{dz} + \frac{\pi n}{ah} W = 0, \\ \frac{d^2 V}{dz^2} + \frac{n}{h} \frac{dV}{dz} + J_2 V + J_3 U - \frac{a}{\pi} J_3 \frac{dW}{dz} + \frac{\pi n}{bh} W = 0, \\ \frac{b}{\pi} J_3 \frac{dU}{dz} + J_4 b U + \frac{a}{\pi} J_3 \frac{dV}{dz} \\ + J_4 a V + J_5 \frac{d^2 W}{dz^2} + \frac{J_5 n}{h} \frac{dW}{dz} + J_6 W = 0, \end{aligned} \quad (10)$$

where

$$\begin{aligned} \begin{bmatrix} J_1 & J_2 \\ J_3 & J_4 \\ J_5 & J_6 \end{bmatrix} \\ = \begin{bmatrix} -\pi^2 \left( \frac{1}{b^2} + \frac{2(1-\nu)}{a^2(1-2\nu)} \right) & -\pi^2 \left( \frac{1}{a^2} + \frac{2(1-\nu)}{b^2(1-2\nu)} \right) \\ \frac{-\pi^2}{ab} \left( \frac{1}{1-2\nu} \right) & \frac{2n\nu\pi}{abh(1-2\nu)} \\ \frac{2(1-\nu)}{1-2\nu} & -\frac{\pi^2}{a^2 b^2} (a^2 + b^2) \end{bmatrix}. \end{aligned} \quad (11)$$

Therefore

$$\begin{aligned} \left( S^2 + \frac{n}{h} S + J_1 \right) U + J_3 V + \left( -\frac{b}{\pi} J_3 S + \frac{\pi n}{ah} \right) W = 0, \\ J_3 U + \left( S^2 + \frac{n}{h} S + J_2 \right) V + \left( -\frac{a}{\pi} J_3 S + \frac{\pi n}{bh} \right) W = 0, \\ \left( \frac{b}{\pi} J_3 S + J_4 b \right) U + \left( \frac{a}{\pi} J_3 S + J_4 a \right) V \\ + \left( J_5 S^2 + \frac{J_5 n}{h} S + J_6 \right) W = 0, \\ S = \frac{d}{dz}. \end{aligned} \quad (12)$$

The general solution of (10) is as follows:

$$\begin{aligned} U = C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} \\ + C_4 e^{s_4 z} + C_5 e^{s_5 z} + C_6 e^{s_6 z}, \\ V = C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} \\ + C_{10} e^{s_4 z} + C_{11} e^{s_5 z} + C_{12} e^{s_6 z}, \\ W = C_{13} e^{s_1 z} + C_{14} e^{s_2 z} + C_{15} e^{s_3 z} \\ + C_{16} e^{s_4 z} + C_{17} e^{s_5 z} + C_{18} e^{s_6 z}, \end{aligned} \quad (13)$$

where  $s_1, s_2, \dots, s_6$  are the roots of the equation below:

$$\det \begin{bmatrix} S^2 + \frac{n}{h} S + J_1 & J_3 & -\frac{b}{\pi} J_3 S + \frac{\pi n}{ah} \\ J_3 & S^2 + \frac{n}{h} S + J_2 & -\frac{a}{\pi} J_3 S + \frac{\pi n}{bh} \\ \frac{b}{\pi} J_3 S + J_4 b & \frac{a}{\pi} J_3 S + J_4 a & J_5 S^2 + \frac{J_5 n}{h} S + J_6 \end{bmatrix} = 0, \quad (14)$$

where  $C_1, C_2, \dots, C_{18}$  are arbitrary integration constants.

The resulting displacement field is defined as follows:

$$\begin{aligned} u(x, y, z) = [C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} + C_4 e^{s_4 z} \\ + C_5 e^{s_5 z} + C_6 e^{s_6 z}] \cos \frac{\pi x}{a} \sin \frac{\pi y}{b}, \\ v(x, y, z) = [C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} + C_{10} e^{s_4 z} \\ + C_{11} e^{s_5 z} + C_{12} e^{s_6 z}] \sin \frac{\pi x}{a} \cos \frac{\pi y}{b}, \\ w(x, y, z) = [C_{13} e^{s_1 z} + C_{14} e^{s_2 z} + C_{15} e^{s_3 z} + C_{16} e^{s_4 z} \\ + C_{17} e^{s_5 z} + C_{18} e^{s_6 z}] \sin \frac{\pi x}{a} \sin \frac{\pi y}{b}. \end{aligned} \quad (15)$$

Substituting (15) into (5), (6) stress component is calculated as follows:

$$\sigma_x = \frac{E_i e^{nz/h} \sin(\pi x/a) \sin(\pi y/b)}{(1-2\nu)(1+\nu)} \times \left( \begin{aligned} & - \frac{(1-\nu)\pi(C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} + C_4 e^{s_4 z} + C_5 e^{s_5 z} + C_6 e^{s_6 z})}{a} \\ & - \frac{v(C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} + C_{10} e^{s_4 z} + C_{11} e^{s_5 z} + C_{12} e^{s_6 z})\pi}{b} \\ & + v(C_{13} e^{s_1 z} s_1 + C_{14} e^{s_2 z} s_2 + C_{15} e^{s_3 z} s_3 + C_{16} e^{s_4 z} s_4 + C_{17} e^{s_5 z} s_5 + C_{18} e^{s_6 z} s_6) \end{aligned} \right), \quad (16a)$$

$$\sigma_y = \frac{E_i e^{nz/h} \sin(\pi x/a) \sin(\pi y/b)}{(1-2\nu)(1+\nu)} \times \left( \begin{aligned} & - \frac{(1-\nu)\pi(C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} + C_{10} e^{s_4 z} + C_{11} e^{s_5 z} + C_{12} e^{s_6 z})}{b} \\ & - \frac{v(C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} + C_4 e^{s_4 z} + C_5 e^{s_5 z} + C_6 e^{s_6 z})\pi}{a} \\ & + v(C_{13} e^{s_1 z} s_1 + C_{14} e^{s_2 z} s_2 + C_{15} e^{s_3 z} s_3 + C_{16} e^{s_4 z} s_4 + C_{17} e^{s_5 z} s_5 + C_{18} e^{s_6 z} s_6) \end{aligned} \right), \quad (16b)$$

$$\sigma_z = \frac{E_i e^{nz/h} \sin(\pi x/a) \sin(\pi y/b)}{(1-2\nu)(1+\nu)} \times \left( \begin{aligned} & - \frac{v\pi(C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} + C_{10} e^{s_4 z} + C_{11} e^{s_5 z} + C_{12} e^{s_6 z})}{b} \\ & - \frac{v\pi(C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} + C_4 e^{s_4 z} + C_5 e^{s_5 z} + C_6 e^{s_6 z})}{a} \\ & + (1-\nu) \left( \frac{C_{13} e^{s_1 z} s_1 + C_{14} e^{s_2 z} s_2 + C_{15} e^{s_3 z} s_3}{C_{16} e^{s_4 z} s_4 + C_{17} e^{s_5 z} s_5 + C_{18} e^{s_6 z} s_6} \right) \end{aligned} \right), \quad (16c)$$

$$\tau_{xy} = \frac{E_i e^{nz/h} \pi \cos(\pi x/a) \cos(\pi y/b)}{2(1+\nu)} \left( \begin{aligned} & \frac{C_7 e^{s_1 z} + C_8 e^{s_2 z} + C_9 e^{s_3 z} + C_{10} e^{s_4 z} + C_{11} e^{s_5 z} + C_{12} e^{s_6 z}}{a} \\ & + \frac{C_1 e^{s_1 z} + C_2 e^{s_2 z} + C_3 e^{s_3 z} + C_4 e^{s_4 z} + C_5 e^{s_5 z} + C_6 e^{s_6 z}}{b} \end{aligned} \right), \quad (16d)$$

$$\tau_{xz} = \frac{E_i e^{nz/h} \pi \cos(\pi x/a) \sin(\pi y/b)}{2(1+\nu)} \times \left( \begin{aligned} & \frac{C_{13} e^{s_1 z} + C_{14} e^{s_2 z} + C_{15} e^{s_3 z} + C_{16} e^{s_4 z} + C_{17} e^{s_5 z} + C_{18} e^{s_6 z}}{a} \\ & + \frac{C_1 s_1 e^{s_1 z} + C_2 s_2 e^{s_2 z} + C_3 s_3 e^{s_3 z} + C_4 s_4 e^{s_4 z} + C_5 s_5 e^{s_5 z} + C_6 s_6 e^{s_6 z}}{\pi} \end{aligned} \right), \quad (16e)$$

$$\tau_{yz} = \frac{E_i e^{nz/h} \pi \sin(\pi x/a) \cos(\pi y/b)}{2(1+\nu)} \times \left( \begin{aligned} & \frac{C_{13} e^{s_1 z} + C_{14} e^{s_2 z} + C_{15} e^{s_3 z} + C_{16} e^{s_4 z} + C_{17} e^{s_5 z} + C_{18} e^{s_6 z}}{b} \\ & + \frac{C_7 s_1 e^{s_1 z} + C_8 s_2 e^{s_2 z} + C_9 s_3 e^{s_3 z} + C_{10} s_4 e^{s_4 z} + C_{11} s_5 e^{s_5 z} + C_{12} s_6 e^{s_6 z}}{\pi} \end{aligned} \right). \quad (16f)$$

The resultant moments on a unit of length are obtained by using relations (16a)–(16f):

$$M_x = \frac{E_i \sin(\pi x/a) \sin(\pi y/b)}{(1-2\nu)(1+\nu)} \times \sum_{i=1}^6 (ab(n+hs_i)^2) \left[ \begin{array}{l} e^{(h/2)(n/h+hs_i)} h \left( \frac{hn}{2} + h \left( -1 + \frac{hs_i}{2} \right) \right) \left( \begin{array}{l} -aC_{i+6}v\pi \\ C_i(-1+v)\pi \\ +bC_{i+12}vs_i \end{array} \right) \\ -e^{-(h/2)(n/h+hs_i)} h \left( -\frac{hn}{2} + h \left( -1 - \frac{hs_i}{2} \right) \right) \left( \begin{array}{l} -aC_{i+6}v\pi \\ C_i(-1+v)\pi \\ +bC_{i+12}vs_i \end{array} \right) \end{array} \right] \quad (17a)$$

$$M_y = \frac{E_i \sin(\pi x/a) \sin(\pi y/b)}{(1-2\nu)(1+\nu)} \times \sum_{i=1}^6 \frac{1}{ab(n+hs_i)^2} \left[ \begin{array}{l} e^{(h/2)(n/h+hs_i)} h \left( \frac{hn}{2} + h \left( -1 + \frac{hs_i}{2} \right) \right) \left( \begin{array}{l} -bC_i v\pi \\ C_{i+6}(-1+v)\pi \\ +bC_{i+12}vs_i \end{array} \right) \\ -e^{-(h/2)(n/h+hs_i)} h \left( -\frac{hn}{2} + h \left( -1 - \frac{hs_i}{2} \right) \right) \left( \begin{array}{l} -bC_i v\pi \\ C_{i+6}(-1+v)\pi \\ +bC_{i+12}vs_i \end{array} \right) \end{array} \right] \quad (17b)$$

$$M_{xy} = \frac{E_i \pi \cos(\pi x/a) \cos(\pi y/b)}{2(1+\nu)} \times \sum_{i=1}^6 \frac{h(aC_i + bC_{i+6})}{(n+hs_i)^2} \left[ \begin{array}{l} e^{(h/2)(n/h+hs_i)} \left( \frac{hn}{2} + h \left( -1 + \frac{hs_i}{2} \right) \right) \\ -e^{-(h/2)(n/h+hs_i)} \left( -\frac{hn}{2} + h \left( -1 + \frac{hs_i}{2} \right) \right) \end{array} \right] \quad (17c)$$

Using (16a), (16b), (16c), (16d), (16e), and (16f) the transverse shearing forces on a unit of length are by definition

$$Q_x = \frac{E_i \cos(\pi x/a) \sin(\pi y/b)}{2a(1+\nu)} \left[ \sum_{i=1}^6 \frac{h(C_{i+12}\pi + aC_i s_i)}{n+hs_i} \left[ e^{(h/2)(n/h+hs_i)} - e^{-(h/2)(n/h+hs_i)} \right] \right] \quad (18a)$$

$$Q_y = \frac{E_i \sin(\pi x/a) \cos(\pi y/b)}{2b(1+\nu)} \left[ \sum_{i=1}^6 \frac{h(C_{i+12}\pi + bC_{i+6} s_i)}{n+hs_i} \left[ e^{(h/2)(n/h+hs_i)} - e^{-(h/2)(n/h+hs_i)} \right] \right] \quad (18b)$$

### 3. Results and Discussion

In the following, the obtained solution will be employed to analyze the effect of material inhomogeneity on the elastic field in the rectangular plate. Consider a rectangular plate with length  $a = 1.5$  m, width  $b = 1$  m, and thickness  $h = 0.2$  m, with material property  $E_i = 70$  GPa, subjected to top and bottom pressures  $P_{To} = -3 \times 10^6$  Pa and  $P_{Bo} = -1.5 \times 10^6$  Pa, respectively. It is assumed the Poisson's ratio  $\nu$  has a constant value of 0.3. Dimensionless and normalized variables are used. For different values of  $n$ , dimensionless modulus of elasticity along the  $z$  direction is plotted in

Figure 2. According to this figure, at the same position  $-0.5 \leq z/h \leq 0$ , dimensionless modulus of elasticity is increasing as the parameter  $n$  is decreasing, while for  $0 \leq z/h \leq 0.5$ , dimensionless modulus of elasticity is increasing as the parameter  $n$  is increasing.

Figure 3 displays the nondimensional displacement of the plate in  $z$  direction for different values of parameter  $n$ . This plot displays that the magnitude of changing  $w$  by  $z$  is low, so for,  $n < 0$  assuming plane strain is true and reasonable, but, for  $n > 0$ , the amount of changing  $w$  by  $z$  is high.

In Figure 4 is shown the nondimensional displacement in the  $x$  direction versus  $x/a$  for  $z = h/3$ ,  $y = b/2$ . In this plot



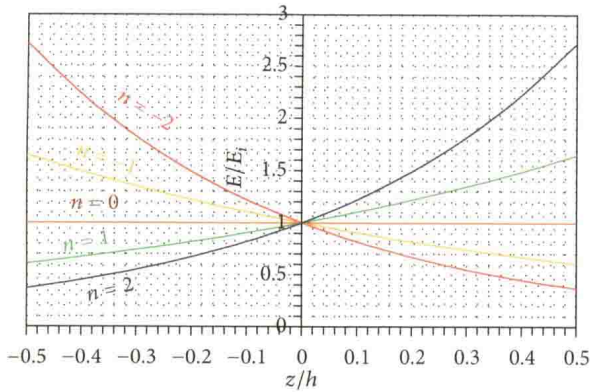
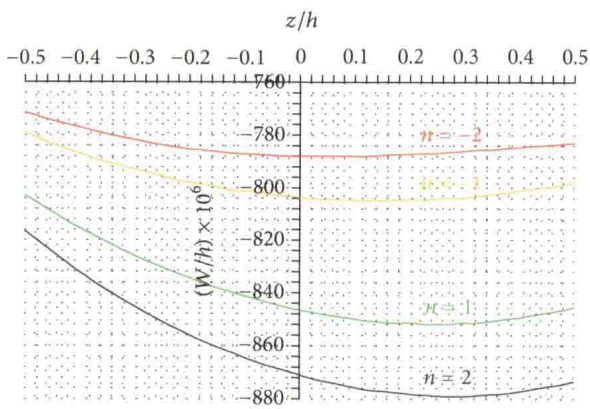
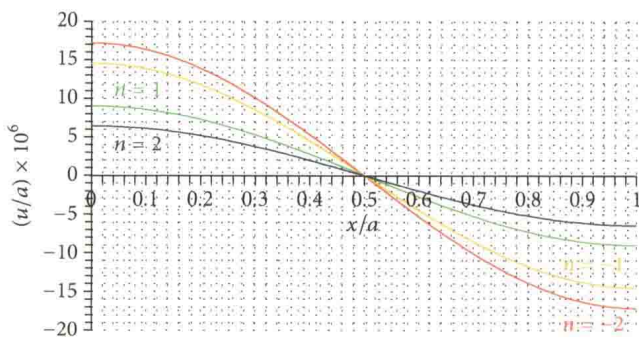


FIGURE 2: Distribution of modulus of elasticity.

FIGURE 3: Distribution of displacement in  $z$  direction of the plate versus  $z/h$  at  $x = a/2$ ,  $y = b/2$ .FIGURE 4: Distribution of displacement in  $x$  direction of the plate versus  $x/a$  at  $y = b/2$ ,  $z = h/3$ .

displacement is decreasing as the parameter  $n$  is increasing. In Figure 5 is shown the nondimensional displacement in the  $y$  direction versus  $y/b$  for  $z = h/3$ ,  $x = a/2$ .

In Figure 6 is shown the variation of nondimensional stress in the  $z$  direction versus nondimensional thickness at the  $x = a/2$ ,  $y = b/2$ . This plot shows that the boundary conditions at the up and down surfaces are satisfied. Also at the constant  $z$ , by increasing the parameter  $n$ , it is observed the stress is decreased.

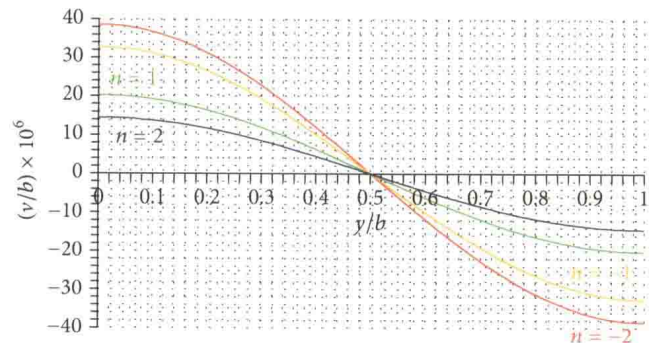
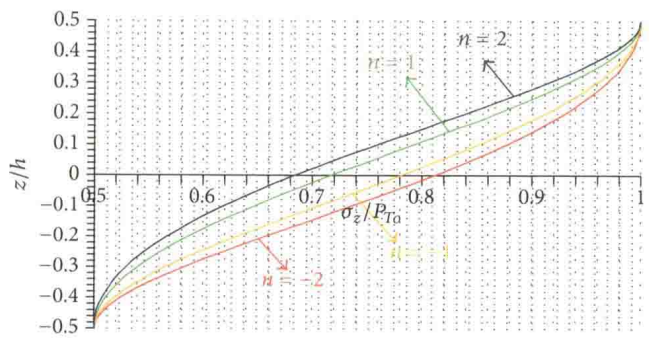
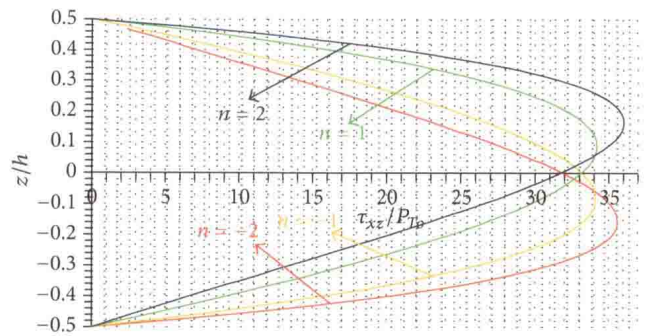
FIGURE 5: Distribution of displacement in  $x$  direction of the plate versus  $y/b$  at  $x = a/2$ ,  $z = h/3$ .FIGURE 6: Distribution of nondimensional stress in the  $z$  direction versus  $z/h$  at  $x = a/2$ ,  $y = b/2$ .FIGURE 7: Distribution of  $\tau_{xz}/P_{T0}$  versus  $z/h$  at  $x = a/2$ ,  $y = b/2$ .

Figure 7 shows the  $(\tau_{xz}/P_{T0}) \times 10^{18}$  according to the  $z/h$  for the variable amount of  $n$ : this figure probes that the stress's component can be deleted proportionally to other components.

#### 4. Conclusion

It is apparent that close form solutions are important to simplified kinds of real engineering problems. In this paper is studied the rectangular plate that is made of functionally graded material with the variable properties (exponential form) by using 3D elasticity theory. Then some exact solution packages for stresses, displacements are presented.