

Hong Chen · Bingzhao Gao

Nonlinear Estimation and Control of Automotive Drive



Science Press
Beijing



Springer

Hong Chen • Bingzhao Gao

Nonlinear Estimation and Control of Automotive Drivetrains

(汽车传动系的非线性估计与控制)



 Science Press
Beijing

 Springer

Hong Chen
Jilin University
Changchun, People's Republic of China

Bingzhao Gao
Jilin University
Changchun, People's Republic of China

ISBN 978-3-642-41571-5

ISBN 978-3-642-41572-2 (eBook)

DOI 10.1007/978-3-642-41572-2

Springer Heidelberg New York Dordrecht London

Jointly published with Science Press Beijing

ISBN: 978-7-03-038887-2 Science Press Beijing

Library of Congress Control Number: 2013957939

© Science Press Beijing and Springer-Verlag Berlin Heidelberg 2014

This work is subject to copyright. All rights are reserved by the Publishers, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed. Exempted from this legal reservation are brief excerpts in connection with reviews or scholarly analysis or material supplied specifically for the purpose of being entered and executed on a computer system, for exclusive use by the purchaser of the work. Duplication of this publication or parts thereof is permitted only under the provisions of the Copyright Law of the Publishers' locations, in its current version, and permission for use must always be obtained from Springer. Permissions for use may be obtained through RightsLink at the Copyright Clearance Center. Violations are liable to prosecution under the respective Copyright Law.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

While the advice and information in this book are believed to be true and accurate at the date of publication, neither the authors nor the editors nor the publishers can accept any legal responsibility for any errors or omissions that may be made. The publishers make no warranty, express or implied, with respect to the material contained herein.

Not for sale outside the Mainland of China (Not for sale in Hong Kong SAR, Macau SAR, and Taiwan, and all countries, except the Mainland of China)

Nonlinear Estimation and Control of Automotive Drivetrains

(汽车传动系的非线性估计与控制)

Preface

Motivation

Electronic control has become the core technology in automotive industry to meet the increasingly stringent emission legislation and dynamic performance requirements. Accordingly, automotive electronics account for a larger and larger proportion of the manufacturing cost of the whole vehicle, including not only hardware cost but also the development cost of control software.

Although at present the widely used control algorithms are still based on event-driven (rule-based) feedforward and PID control, the question of how to design a high-performance control program efficiently using advanced control theories has become a hot topic in the fields of both control and automobile engineering. Since 2006, many academic journals, including IEEE T. Control Systems Technology, Control Engineering Practice, Int. J. Control, Vehicle System Dynamics, Int. J. Powertrain, etc. have published their special issues on automotive control. Besides, sessions on automotive control are organized every year at the annual conferences of IFAC, IEEE CDC and ACC, etc.

The application of advanced control theories is attractive because of its potential to reduce the calibration workload and improve the dynamic control performance under numerous driving conditions and large environmental variations.

This text presents an in-depth discussion on the control problems in automotive drivetrains, particularly the types of hydraulic Automatic Transmission (AT), Dual Clutch Transmission (DCT) and Automated Manual Transmission (AMT). The challenging estimation and control problems, such as driveline torque estimation and gear shift control, are addressed by applying the most up-to-date nonlinear control theories, including constructive nonlinear control (Backstepping, Input-to-State Stable) and Model Predictive Control (MPC). The estimation and control performance is improved while the calibration effort is reduced significantly. This book gives a detailed design process of many examples, and thus enables the readers to understand how to successfully combine the “purely theoretical methodologies” with “actual vehicle applications”.

Intended Readers

This book should enable graduate and higher-level undergraduate students to understand the control and estimation problems in automotive drivetrains, and how to use control theories to solve these practical problems.

This book is also suited for the professional control engineers in the R&D centers of automobile manufacturers.

The Authors

Dr.-Ing. Hong Chen received the B.S. and M.S. degrees in process control from Zhejiang University, Hangzhou, China, in 1983 and 1986, respectively, and the Ph.D. degree (mit Auszeichnung bestanden—with honors) from the University of Stuttgart, Stuttgart, Germany, in 1997. From 1993 to 1997, she was a “Wissenschaftlicher Mitarbeiter” (research assistant) at the Institut für Systemdynamik und Regelungstechnik, University of Stuttgart. Since 1999, she has been a Professor at Jilin University, where she currently serves as “Tang Aoqing Professor”. She is now an IEEE senior member, and serving as a member of international and national technical committees, including IFAC TC Automotive Control, Control Theory of CAA and Process Control of CAA. She was honored and awarded by the National Science Fund of China for Distinguished Young Scholars. Prof. Chen is also the leader of a Program for Changjiang Scholars and Innovative Research Team in University, China. Her main research interests include model predictive control, optimal and robust control, nonlinear control and applications in automobile engineering and mechatronic systems.

Dr. Bingzhao Gao received the B.S. and M.S. degrees in vehicle engineering from Jilin University of Technology, China, in 1998 and Jilin University, China, in 2002, respectively. He received the Ph.D. degree in control engineering under the instructions of Prof. Chen in 2009, and his thesis was honored as an Excellent Doctoral Dissertation of Jilin Province, China. He is also a holder of the Doctor’s degree in mechanical engineering of Yokohama National University, Japan. Dr. Gao is currently an associate professor at Jilin University. His research interests include vehicle powertrain control and vehicle stability control.

Acknowledgements

The authors would like to express their great appreciation to many students in Prof. Chen group, **chen's group** and, in particular, to Dr. Xiaohui Lu and Lu Tian for their hard work and contributions to Chap. 8 and Sect. 4.5, and to Qifang Liu and Fang Xu for their help in manuscript review and proofreading, and also to Dr. Shuyou Yu for his help in the programming of LMI and Nonlinear MPC.

The authors also greatly acknowledge National Nature Science Foundation of China, Ministry of Education of China, Ministry of Science and Technology of China, and Jilin Provincial Science & Technology Department for the financial support.

Changchun, People's Republic of China

Hong Chen
Bingzhao Gao

Contents

| | | |
|----------|---|-----------|
| 1 | Introduction | 1 |
| 1.1 | Introduction of Automotive Drivetrain | 1 |
| 1.1.1 | Engine | 1 |
| 1.1.2 | Clutch/Torque Converter | 2 |
| 1.1.3 | Transmissions | 5 |
| 1.1.4 | Propeller Shaft and Differential Gear Box | 5 |
| 1.1.5 | Drive Axle Shaft | 6 |
| 1.1.6 | Tires and Vehicle | 6 |
| 1.2 | Overview of Automotive Transmissions | 7 |
| 1.2.1 | Hydraulic Automatic Transmission (AT) | 7 |
| 1.2.2 | Automated Manual Transmission (AMT) | 8 |
| 1.2.3 | Dual Clutch Transmission (DCT) | 11 |
| 1.2.4 | Continuously Variable Transmission (CVT) | 12 |
| 1.2.5 | Final Remark | 13 |
| 1.3 | Why Consider Model-Based Control? | 14 |
| 1.3.1 | Evolution of Control Systems for Automotive Powertrains | 14 |
| 1.3.2 | Introduction of Model-Based Design | 16 |
| 1.3.3 | Application Examples of Model-Based Control | 19 |
| 1.4 | Why Consider Nonlinear Control? | 20 |
| 1.4.1 | Necessity of Nonlinear Control | 20 |
| 1.4.2 | State-of-the-Art of Applied Nonlinear Control | 21 |
| 1.5 | Structure of the Text | 27 |
| | References | 30 |
| 2 | Pressure Estimation of a Wet Clutch | 37 |
| 2.1 | Introduction | 37 |
| 2.2 | Description and Modeling of a Powertrain System | 38 |
| 2.3 | Clutch Pressure Estimation Without Consideration of Drive Shaft Stiffness | 41 |
| 2.3.1 | Clutch System Modeling and Problem Statement | 42 |
| 2.3.2 | Reduced-Order Nonlinear State Observer | 47 |

| | | |
|----------|--|------------|
| 2.3.3 | Simulation Results | 55 |
| 2.3.4 | Design of Full-Order Sliding Mode Observer and Comparison | 56 |
| 2.4 | Clutch Pressure Estimation when Considering Drive Shaft Stiffness | 60 |
| 2.4.1 | Clutch System Modeling when Considering the Drive Shaft | 60 |
| 2.4.2 | Design of Reduced-Order Nonlinear State Observer . . . | 63 |
| 2.4.3 | Simulation Results | 67 |
| 2.5 | Notes and References | 71 |
| | References | 71 |
| 3 | Torque Phase Control of the Clutch-to-Clutch Shift Process | 73 |
| 3.1 | Introduction | 73 |
| 3.2 | Motivation of Clutch Timing Control | 74 |
| 3.3 | Clutch Control Strategy | 76 |
| 3.4 | Simulation Results | 77 |
| 3.4.1 | Powertrain Simulation Model | 77 |
| 3.4.2 | Simulation Results | 77 |
| 3.5 | Notes and References | 80 |
| | References | 81 |
| 4 | Inertia Phase Control of the Clutch-to-Clutch Shift Process | 83 |
| 4.1 | Introduction | 83 |
| 4.2 | Two-Degree-of-Freedom Linear Controller | 85 |
| 4.2.1 | Controller Design | 85 |
| 4.2.2 | Simulation Results | 89 |
| 4.3 | Nonlinear Feedback–Feedforward Controller | 91 |
| 4.3.1 | Clutch Slip Controller | 92 |
| 4.3.2 | Simulation Results | 95 |
| 4.4 | Backstepping Controller | 98 |
| 4.4.1 | Nonlinear Controller with ISS Property | 99 |
| 4.4.2 | Implementation Issues | 105 |
| 4.4.3 | Controller of the Considered Clutch System | 106 |
| 4.4.4 | Simulation Results | 109 |
| 4.5 | Backstepping Controller for DCTs | 115 |
| 4.5.1 | System Modeling and Problem Statement | 115 |
| 4.5.2 | Controller Design | 117 |
| 4.5.3 | Simulation Results | 119 |
| 4.6 | Notes and References | 122 |
| | References | 123 |
| 5 | Torque Estimation of the Vehicle Drive Shaft | 125 |
| 5.1 | Introduction | 125 |
| 5.2 | Driveline Modeling and Problem Statement | 126 |
| 5.2.1 | Driveline Modeling | 126 |
| 5.2.2 | Estimation Problem Statement | 128 |
| 5.3 | Reduced-Order Nonlinear Shaft Torque Observer | 129 |
| 5.3.1 | Structure of the Observer | 129 |

| | | |
|----------|--|------------|
| 5.3.2 | Properties of the Error Dynamics | 130 |
| 5.3.3 | Guideline of Choosing Tuning Parameters | 132 |
| 5.3.4 | Observer Design for Considered Vehicle | 133 |
| 5.4 | Simulation Results | 136 |
| 5.4.1 | Powertrain Simulation Model | 136 |
| 5.4.2 | Simulation Results | 139 |
| 5.5 | Notes and References | 144 |
| | References | 145 |
| 6 | Clutch Disengagement Timing Control of AMT Gear Shift | 147 |
| 6.1 | Introduction | 147 |
| 6.2 | Observer-Based Clutch Disengagement Timing Control | 149 |
| 6.3 | Clutch Disengagement Strategy | 150 |
| 6.4 | Simulation Results | 151 |
| 6.4.1 | Simulation Results with Constant Observer Gain | 151 |
| 6.4.2 | Simulation Results with Switched Observer Gains | 153 |
| 6.5 | Notes and References | 154 |
| | References | 156 |
| 7 | Clutch Engagement Control of AMT Gear Shift | 157 |
| 7.1 | Introduction | 157 |
| 7.2 | Power-On Upshift of AMT | 157 |
| 7.2.1 | Dynamics and Control Strategy | 159 |
| 7.2.2 | Simulation Results | 167 |
| 7.3 | Power-On Downshift of AMT | 169 |
| 7.3.1 | Dynamic Process of Power-On Downshift | 171 |
| 7.3.2 | Control Problem Description | 172 |
| 7.3.3 | Controller Design of Torque Recovery Phase | 173 |
| 7.3.4 | Simulation Results | 173 |
| 7.4 | Notes and References | 175 |
| | References | 177 |
| 8 | Data-Driven Start-Up Control of AMT Vehicle | 179 |
| 8.1 | Introduction | 179 |
| 8.2 | Control Requirements | 180 |
| 8.3 | Data-Driven Start-Up Predictive Controller of AMT Vehicle | 182 |
| 8.3.1 | Subspace Linear Predictor | 182 |
| 8.3.2 | Data-Driven Start-Up Predictor | 183 |
| 8.3.3 | Predictive Output Equation | 185 |
| 8.3.4 | Data-Driven Predictive Controller Without Constraints | 186 |
| 8.3.5 | Data-Driven Predictive Controller with Constraints | 187 |
| 8.4 | Simulation Results | 188 |
| 8.4.1 | Controller Test Under Nominal Conditions | 188 |
| 8.4.2 | Controller Test Under Changed Conditions | 191 |
| 8.5 | Notes and References | 194 |
| | References | 195 |

Appendix A Lyapunov Stability 197

 References 201

Appendix B Input-to-State Stability (ISS) 203

 B.1 Comparison Functions 204

 B.2 Input-to-State Stability 205

 B.2.1 Useful Lemmas 207

 References 208

Appendix C Backstepping 209

 C.1 About CLF 209

 C.2 Backstepping Design 210

 C.3 Adaptive Backstepping 215

 References 220

Appendix D Model Predictive Control (MPC) 221

 D.1 Linear MPC 223

 D.2 Nonlinear MPC (NMPC) 229

 D.2.1 NMPC Based on Discrete-Time Model 229

 D.2.2 NMPC Based on Continuous-Time Model 231

 References 234

Appendix E Linear Matrix Inequality (LMI) 237

 E.1 Convexity 237

 E.2 Linear Matrix Inequalities 238

 E.3 Casting Problems in an LMIs Setting 239

 References 242

Appendix F Subspace Linear Predictor 243

 References 250

Chapter 1

Introduction

1.1 Introduction of Automotive Drivetrain

Generally speaking, the terms of “powertrain” and “drivetrain” (see Fig. 1.1) refer both to the vehicle components which produce and deliver the power and torque. The term “powertrain” sometimes emphasizes the engine and the transmission, while “drivetrain” (or driveline) stresses the clutch (torque converter), transmission, driveshaft, differential gear box, axle shaft and wheels. The drivetrain delivers engine torque to the tires, and makes it possible for the vehicle to accelerate or climb a gradient. Figure 1.2 shows the function of a step-ratio transmission, where the engine torque characteristics are re-distributed, through different gear ratios, to approach a desired pattern of wheel torque.

1.1.1 Engine

Internal combustion engine generates power by converting chemical energy contained in the fuel into heat, and the heat produces then mechanical work. The engine torque T_e is determined by the flow rate of intake air and fuel, and influenced by combustion efficiency and friction losses. In modern vehicular powertrains, high-speed CAN (Controller Area Network) bus connects the control units of the engine and the transmission, and the shared information includes throttle angle, engine torque and engine speed, etc. On the other hand, the transmission sends torque request to the engine through CAN bus. Here, the detailed engine model will not be considered in the context of this book.

The dynamic equation of engine speed is described by

$$I_e \dot{\omega}_e + C_e \omega_e = T_e - T_c, \quad (1.1)$$

where I_e is the inertia moment of the engine crank shaft, C_e is the damping coefficient, ω_e is the engine rotational speed, T_e is the engine torque and T_c denotes the

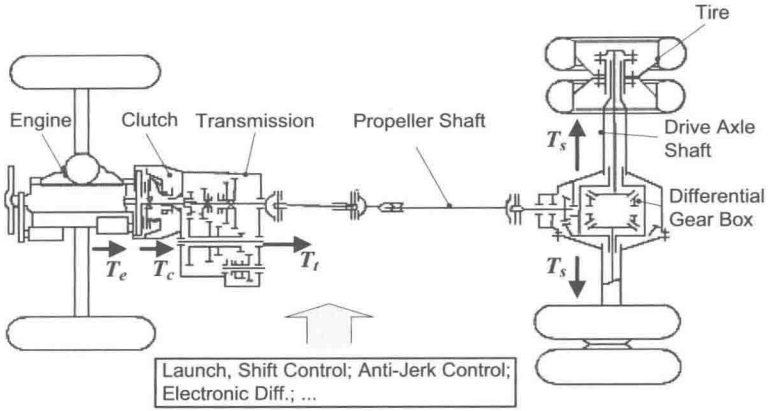


Fig. 1.1 Drivetrain of FR (Front Engine, Rear Wheel Drive) vehicle [30]: T_e , engine torque; T_c , clutch torque; T_t , transmission output torque; T_s , torque of drive axle shaft

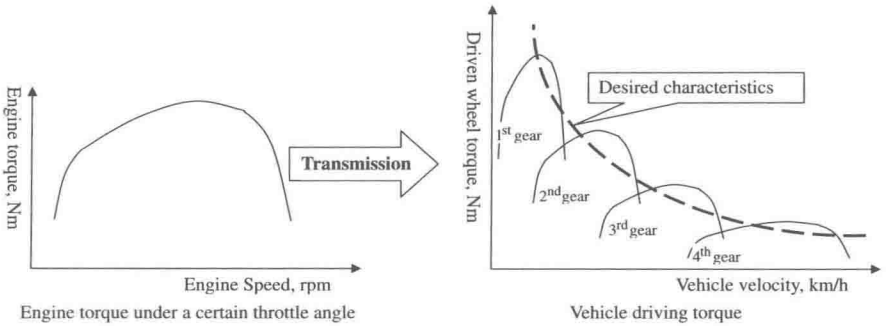


Fig. 1.2 Drive torque characteristics of a vehicle with a step-ratio transmission

clutch torque. The most simple engine model is the static torque map, which is a lookup table with the inputs of the throttle angle and the engine speed, and denoted as

$$T_e = T_e(\omega_e, \theta_{th}), \quad (1.2)$$

where θ_{th} is the engine throttle angle. Various maps in vehicle engineering are obtained from large numbers of experiments in the steady state. As an example, the torque map of a 2000 cc gasoline engine is shown in Fig. 1.3.

1.1.2 Clutch/Torque Converter

A dry clutch, shown in Fig. 1.4 [61], consists of a housing, pressure plates, friction plates, a clutch disc with torsion damper and a release mechanism. In manual

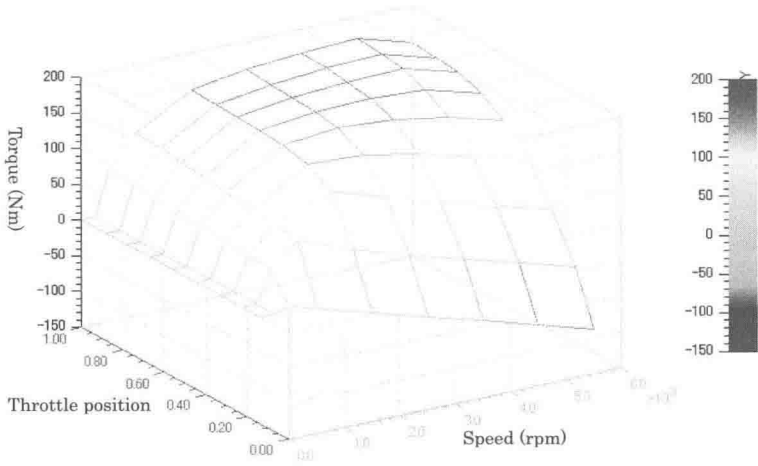


Fig. 1.3 Example of an engine torque map (lookup table)

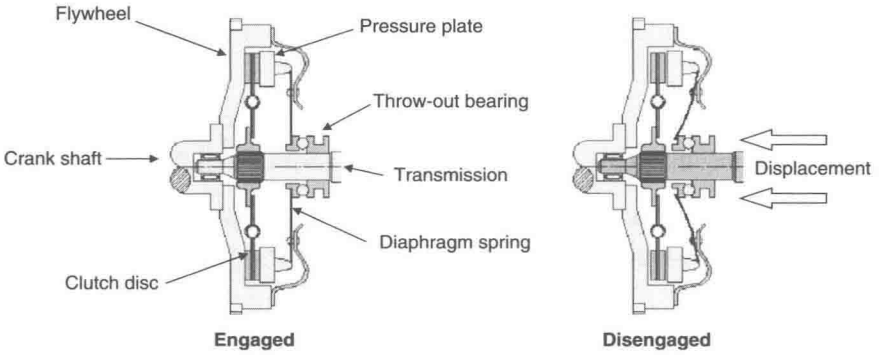


Fig. 1.4 Schematic overview of a dry clutch. Reprinted from [61], copyright 2007, with permission from Taylor & Francis

transmissions, when the vehicle is starting off from standstill, the clutch slips to compensate for the speed difference between the engine and the drivetrain. Moreover, when a gear shift operation takes place, the clutch disengages the engine from the transmission, and then engages them after gear shifting is over.

When the clutch is slipping, the torque delivered through the clutch T_c is determined by the clamping force F_c implemented on the friction disc:

$$T_c = F_c \mu_d R_c \text{sign}(\Delta\omega), \quad (1.3)$$

where F_c is the clamping force, μ_d is the dynamic friction coefficient, R_c is the effective radius, and $\Delta\omega$ is the speed difference between the engine and the drivetrain.

Fig. 1.5 Clutch spring characteristics


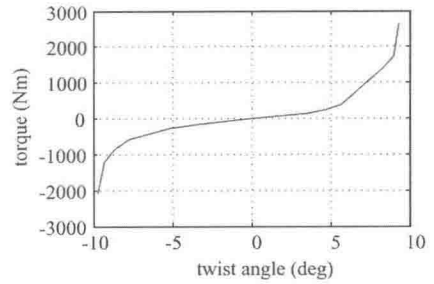


Fig. 1.6 Schematic overview of a torque converter [55]

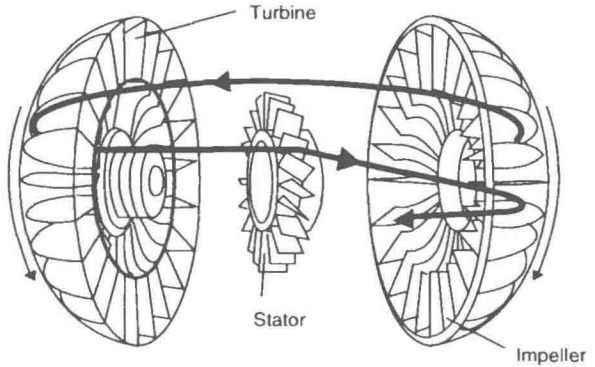

It is worth noting that μ_d is not time-invariant, but varying with slip speed and the temperature.

Considering the damp spring embedded in the clutch, the torque of the clutch friction plate T_c is also a nonlinear function of the twist angle θ_c as follows:

$$T_c = T_c(\theta_c, \dot{\theta}_c), \quad (1.4)$$

and the equation is applicable for both slipping and locked-up state of the clutch.

The static characteristics of the torsion spring of a 4-ton truck clutch is shown in Fig. 1.5.

On hydraulic automatic transmissions, the torque converter, as shown in Fig. 1.6, assumes the functions of the clutch. When the turbine is driven forward, the dynamics of the torque converter are often characterized as [145]

$$T_p = C(\lambda)\omega_e^2 \quad (1.5)$$

and


$$T_{tb} = t(\lambda)T_p, \quad (1.6)$$

where T_p is the pump torque and T_{tb} is the turbine torque, λ is the speed ratio defined as

$$\lambda = \frac{\omega_{tb}}{\omega_e}, \quad (1.7)$$

with ω_{tb} being the turbine speed.

Fig. 1.7 Capacity factor and torque ratio of a torque converter

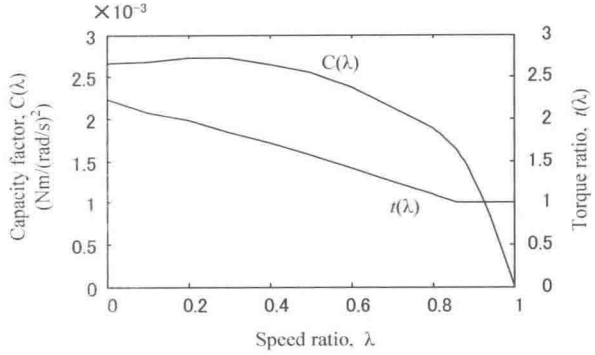

An example of the capacity factor $C(\lambda)$ and the torque ratio $t(\lambda)$ in a mid-size passenger car are given in Fig. 1.7.

1.1.3 Transmissions

There are many different types of transmissions which will be described in detail in the following sections. The function of the transmission is to modify the engine torque and engine speed with the i th gear ratio R_i , so that the momentary traction requirement could be satisfied. Neglecting the friction and the inertia torques, the transmission could be modeled as

$$T_t = T_c R_i, \quad (1.8a)$$

$$\omega_t = \frac{\omega_c}{R_i}, \quad (1.8b)$$

where T_t is the transmission output torque, T_c is the clutch output torque (transmission input torque), ω_t is the transmission output speed, ω_c is the clutch output speed (transmission input speed).

1.1.4 Propeller Shaft and Differential Gear Box

In FF (Front Engine, Front Wheel Drive) vehicles, the differential box is always combined with the transmission directly, while in FR (Front Engine, Rear Wheel Drive) vehicles, a propeller shaft connects the transmission and the differential box. The stiffness of the propeller shaft is comparatively larger, compared with that of the axle shaft and the clutch torsion spring. However, the clearance in the drivetrain shafts is an important element when modeling the propeller shaft precisely.

The differential unit compensates for the speed difference between the inside and the outside wheels when the vehicle is cornering. Generally speaking, the two

output torques of the differential box are equivalent, while the two rotational speeds do not necessarily equal each other. If the twist deflection of the propeller shaft is ignored, we have

$$T_l = T_r, \quad (1.9a)$$

$$\omega_l + \omega_r = \frac{2\omega_t}{R_{df}}, \quad (1.9b)$$

where R_{df} is the gear ratio of the differential box, the subscripts l and r denote the left side and the right side.

At the same time, the rotational dynamic equation from the transmission to the differential is

$$I_p \dot{\omega}_t + C_p \omega_t = T_t - \frac{2T_{l,r}}{R_{df}}, \quad (1.10)$$

where I_p and C_p are the inertia and the damping of the propeller shaft, respectively.

1.1.5 Drive Axle Shaft

The two drive shafts between the differential gear and the driven wheels are represented as a torsion spring with stiffness coefficient K_s and a damping with coefficient C_s as follows:

$$T_s = 2T_{l,r}, \quad (1.11a)$$

$$T_s = K_s \theta_s + C_s \dot{\theta}_s, \quad (1.11b)$$

where T_s is the axle shaft torque and θ_s is the twist angle of the axle shaft satisfying

$$\dot{\theta}_s = \omega_{l,r} - \omega_w, \quad (1.12)$$

with ω_w being the wheel speed.

1.1.6 Tires and Vehicle

The longitudinal tire force F_x , which is usually simplified as a function of the longitudinal slip ratio S_x , rises fast when S_x increases under a threshold and declines slowly after that [55], see Fig. 1.8. The force F_z is vertical load of the tire, and the longitudinal slip is calculated as

$$S_x = \frac{R_w \omega_w - V}{R_w \omega_w} \quad \text{when driving,} \quad \text{and} \quad (1.13a)$$

$$S_x = \frac{V - R_w \omega_w}{V} \quad \text{when braking,} \quad (1.13b)$$