


# Polymer Grafting and Crosslinking

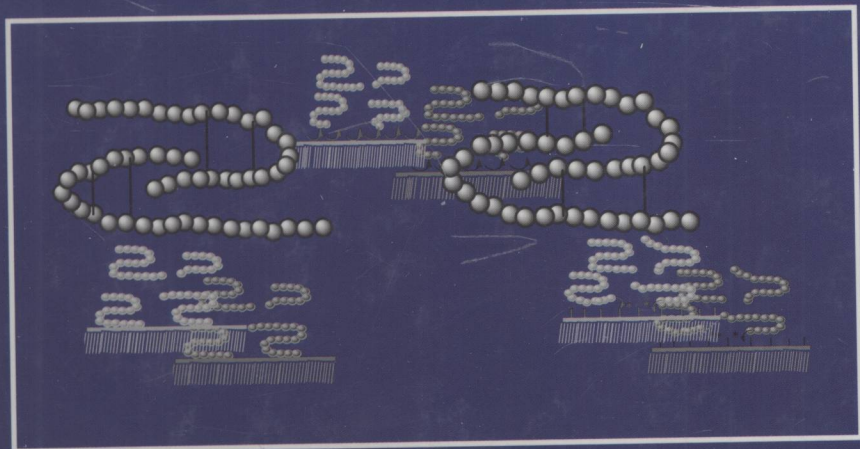

Edited by  
**Amit Bhattacharya**  
**James W. Rawlins**  
**Paramita Ray**

0631  
P783.5

# POLYMER GRAFTING AND CROSSLINKING

---

Edited by

**AMIT BHATTACHARYA**  
**JAMES W. RAWLINS**  
**PARAMITA RAY**



 **WILEY**



E2009000958

**A JOHN WILEY & SONS, INC. PUBLICATION**

Copyright © 2009 by John Wiley & Sons, Inc. All rights reserved

Published by John Wiley & Sons, Inc., Hoboken, New Jersey

Published simultaneously in Canada

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning, or otherwise, except as permitted under Section 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, Inc., 222 Rosewood Drive, Danvers, MA 01923, (978) 750-8400, fax (978) 750-4470, or on the web at [www.copyright.com](http://www.copyright.com). Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 111 River Street, Hoboken, NJ 07030, (201) 748-6011, fax (201) 748-6008, or online at <http://www.wiley.com/go/permission>.

**Limit of Liability/Disclaimer of Warranty:** While the publisher and author have used their best efforts in preparing this book, they make no representations or warranties with respect to the accuracy or completeness of the contents of this book and specifically disclaim any implied warranties of merchantability or fitness for a particular purpose. No warranty may be created or extended by sales representatives or written sales materials. The advice and strategies contained herein may not be suitable for your situation. You should consult with a professional where appropriate. Neither the publisher nor author shall be liable for any loss of profit or any other commercial damages, including but not limited to special, incidental, consequential, or other damages.

For general information on our other products and services or for technical support, please contact our Customer Care Department within the United States at (800) 762-2974, outside the United States at (317) 572-3993 or fax (317) 572-4002.

Wiley also publishes its books in a variety of electronic formats. Some content that appears in print may not be available in electronic formats. For more information about Wiley products, visit our web site at [www.wiley.com](http://www.wiley.com).

***Library of Congress Cataloging-in-Publication Data:***

Polymer grafting and crosslinking / edited by Amit Bhattacharya, James W. Rawlins, and Paramita Ray.

p. cm.

Includes index.

ISBN 978-0-470-40465-2 (cloth)

1. Crosslinking (Polymerization) 2. Crosslinked polymers—Industrial applications.

I. Bhattacharya, Amit. II. Rawlins, James W. III. Ray, Paramita.

TP156.P6P585 2009

668.9—dc22

2008026774

Printed in the United States of America

10 9 8 7 6 5 4 3 2 1

# **POLYMER GRAFTING AND CROSSLINKING**

# PREFACE

We are very fortunate to have the opportunity to edit a book in the grafting and crosslinking arena. While several excellent books on polymers are available, our experience in research over the years has revealed the need for a book which emphasizes the basics as well as applied orientation for beginners and those who want to increase their knowledge. An attempt has been made to present the subject lucidly by adopting a non-mathematical approach.

The book covers various mechanistic methods, kinetic factors, analytical evidence, and diverse applications. We extend our appreciation to the numerous publishers who have graciously accorded us permission to use figures and data from their publications.

This book is intended for beginners in this area, advanced students, as well as teachers. It is expected that they possess an adequate background in polymer technology. However, due to the book's wide coverage and simple style, researchers can also benefit from it. The book consists of twelve chapters. All topics have been selected with great care bearing in mind the needs of the students. The first five chapters provide a vivid introduction to the basic concepts. The remaining chapters are devoted to applications.

Needless to say, we owe a great debt of gratitude to our spouses for their encouragement, and to the authors of the various chapters. We are deeply indebted to Dr. P. K. Ghosh, Prof. S. N. Bhattacharyya, and Prof. B. N. Misra for their suggestions and assistance in completing this book. It would have been difficult for us to complete this book without the assistance of our students. Last but not the least, we express our heartiest thanks to readers of the book.

DR. A. BHATTACHARYA  
PROF (DR.) JAMES W. RAWLINS  
DR. P. RAY

# CONTRIBUTORS

**Amit Bhattacharya**, Central Salt and Marine Chemicals Research Institute (Council of Scientific and Industrial Research), G.B. Marg, Bhavnagar, Gujarat-364002, India, [bhattacharyaamitl@rediffmail.com](mailto:bhattacharyaamitl@rediffmail.com)

**Christopher M. Fellows**, School of Science and Technology, The University of New England, Armidale, NSW 2351, Australia, [cfellows@une.edu.au](mailto:cfellows@une.edu.au)

**Eun Seok Gil**, Department of Biomedical Engineering, Tufts University, Medford, MA 02155

**Inderjeet Kaur**, Chemistry Department, Himachalpradesh University, Himachalpradesh, India, [ij\\_kaur@hotmail.com](mailto:ij_kaur@hotmail.com)

**Tao Lu Lowe**, Department of Pharmaceutical Sciences, Thomas Jefferson University, 130 South 9th Street, Philadelphia, PA 19107

**Sharathkumar K. Mendon**, University of Southern Mississippi, Hattiesburg, MS 39406, [sharathkumar.mendon@usm.edu](mailto:sharathkumar.mendon@usm.edu)

**Gauri P. Misra**, Department of Pharmaceutical Sciences, Thomas Jefferson University, 130 South 9th Street, Philadelphia, PA 19107

**Mohamed Nasef**, Chemical Engineering Department, Universiti Teknologi Malaysia, 81310 UTM, Skudai, Johor, Malaysia, [mahmoudeithar@fkkksa.utm.my](mailto:mahmoudeithar@fkkksa.utm.my)

**Mahammad Safikur Rahman**, Ahmedabad Textile Industry's Research Association, Ahmedabad 380015, India, [chem@atira-rnd-tex.org](mailto:chem@atira-rnd-tex.org) or [safikur\\_r@hotmail.com](mailto:safikur_r@hotmail.com)

**James W. Rawlins**, University of Southern Mississippi, Hattiesburg, MS 39406,  
james.rawlins@usm.edu

**Paramita Ray**, Central Salt and Marine Chemicals Research Institute  
(Council of Scientific and Industrial Research), G.B. Marg, Bhavnagar,  
Gujarat-364002, India, paramita022002@yahoo.co.in

**Achintya Sen**, Clariant Chemicals (India) Limited Div. Masterbatches,  
Kolshet, P.O. Sandoz Baug, Thane 400607, Maharashtra, India, aksen004@  
yahoo.com or Achintya.Sen@clariant.com

**Jeremy Swanson**, University of Southern Mississippi, Hattiesburg, MS 39406,  
jeremy.swanson@usm.edu

**James Whittermore IV**, University of Southern Mississippi, Hattiesburg,  
MS 39406, iv.whittermore@usm.edu

# CONTENTS

<b>Preface</b>	<b>vii</b>
<b>Contributors</b>	<b>ix</b>
<b>1 Introduction</b>	<b>1</b>
<i>Amit Bhattacharya and Paramita Ray</i>	
<b>2 Basic Features and Techniques</b>	<b>7</b>
<i>Amit Bhattacharya and Paramita Ray</i>	
<b>3 Mechanism and Kinetics</b>	<b>65</b>
<i>Christopher M. Fellows</i>	
<b>4 Analytical Evidence</b>	<b>93</b>
<i>Amit Bhattacharya and Paramita Ray</i>	
<b>5 Broader Spectrum: Examples</b>	<b>125</b>
<i>Inderjeet Kaur and Paramita Ray</i>	
<b>6 In the Biomedical Arena</b>	<b>145</b>
<i>Gauri P. Misra, Eun Seok Gil, and Tao Lu Lowe</i>	
<b>7 In Textiles</b>	<b>177</b>
<i>Mahammad Safikur Rahman</i>	
<b>8 In Automobiles</b>	<b>203</b>
<i>James W. Rawlins and Jeremy Swanson</i>	



<b>9</b>	<b>In Cable Technology</b>	<b>211</b>
	<i>Achintya Sen</i>	
<b>10</b>	<b>In Separation and Purification</b>	<b>233</b>
	<i>Mohamed Nasef</i>	
<b>11</b>	<b>In Coatings, Adhesives, and Laminates</b>	<b>273</b>
	<i>James W. Rawlins and Sharathkumar K. Mendon</i>	
<b>12</b>	<b>In Commodity Plastics</b>	<b>319</b>
	<i>James W. Rawlins and James Whittermore IV</i>	
	<b>Future Directions</b>	<b>327</b>
	<i>Amit Bhattacharya</i>	
	<b>Index</b>	<b>329</b>

---

# 1

---

## INTRODUCTION

AMIT BHATTACHARYA AND PARAMITA RAY

We deal with what we are. This saying serves to introduce the discussions on polymers. A quantum leap in this area brought about the Industrial Revolution in the 19<sup>th</sup> century. Recognition should be given to Herman Staudinger, who, in 1922, proposed the first explanation that polymers contain long chains of relatively simple repeating units. This date marks a turning point in the history of polymers, for it was then that the term “macromolecule” was first used. Thus the word becomes self-explanatory when broken down: The word “poly” means many, and “meros” means parts. The macromolecular concept was formulated by Staudinger, who received the Nobel Prize in 1953. Polyethylene, for example, is a polymer that contains large numbers of  $[-CH_2-CH_2-]$  units. In 1970, the first experiments with polyacetylene took place. Polyacetylene is a long string of molecules chained together, with one unit of acetylene repeated over and over again. In 1977, the trio of MacDiarmid, Shirakawa, and Heeger joined to focus in this arena to revolutionize electronics and received the Nobel Prize in the 21<sup>st</sup> century.

Polymers play an essential role in the emergence of the modern world. Though started in the middle of the last century, today, the uses of polymer systems are legion. Technology from commodities to rockets is based on productive research on polymers. The polymer industry developed as population growth created increased demands for natural products that could not readily be met because of their limited supplies. “Osmosis” and “reverse osmosis” techniques that regulate life in every aspect are based on polymers.

Abbe Nolet had observed the “osmosis” phenomenon in the year 1748 in pig bladders, with natural polymers. Later on, synthetic ones came to replace natural polymers.

The history of the “reverse osmosis” membrane started at UCLA in 1959. Samuel Yuster and two of his students, Sidney Loeb and Srinivasa Sourirajan, produced a functional synthetic reverse osmosis membrane from cellulose acetate polymer. The ability to make high-quality biocompatible materials in the biomedical field is at the heart of this revolution.

Traditionally, people in the medical field view polymers as components of devices such as inhalers and catheters, inert bioprotheses, or transdermal patches. Polymers have also proactive role, i.e., they are used as integral parts of therapeutics. New drugs, as well as drug delivery systems based on polymers, have the potential to counter many diseases. The application of synthetic polymers for gene therapy has also been investigated. They may provide a safer way of gene delivery than use of viruses as vectors. Polymeric materials have also been used for biosensors, in testing devices, and for bioregulation.

Textile products made of polymers have always satisfied aesthetic requirements. Synthetic polymers replace natural polymers (e.g., wool and cotton) to help clothe growing populations. The success of aramid fibers has also spawned a variety of other polymer fibers based on nylon, terephthalates, and polyethylene, for example.

Polymers are also identified with insulation. This property has contributed to the enormous success of plastics in insulated shielding for wires and other safety functions. Polymers are also used in the conducting or semi-conducting fields for such things as plastic batteries, light emitting diodes, and sensors.

Polymers touch every aspect of our lives. The nylon toothbrush, the plastic bucket, or the polystyrene umbrella handle are all polymers. Knowingly or unknowingly, every individual today relies on polymers to meet his needs.

Though polymers are legion, sometimes they cannot fulfill the demand, depending on their properties. Improvements in polymers are tremendously important because they will widen the scope of application. There are two main approaches: construction of new molecules that are likely, from their molecular composition, to have the desired properties, and modification of properties of existing large-scale polymers.

Modification of polymers has received greater attention in light of the scarcity of starting materials required for the synthesis of new monomers to deliver better polymeric materials. In other words, modification is essential to meet various challenges, as it is very difficult to get new polymers. The next generation awaits polymer modification as it opens up new possibilities. Surface and bulk properties can be improved easily by modifying conventional polymers. Sometimes, balancing of properties is needed, and this is possible only through modification of polymers.

Polymer modification is required to bring specific properties to the modified material, such as enhanced thermal stability, multiphase physical responses, compatibility, impact response, flexibility, and rigidity. Modifications make an insoluble polymer from a soluble one or vice versa. Thus polymer modification improves the processibility of the polymers. One of the recent directions

regarding polymer modification is intended to avoid their nonbiodegradable nature.

We have already referred to giant molecules and indicated that they are very long molecular chains of carbon atoms, often literally “branched” like a tree or linked together crossways in various directions. These chains can be provided by nature, as in the case of cellulose, or are built up from single short molecules known as “monomers” by uniting them into a chain to give “polymers,” which is known as polymerization. When monomers of different kinds are united, the product is known as a “copolymer,” and the process of uniting different monomers is copolymerization. Depending on the alignment sequence of different monomers in a polymer chain, copolymers are diversified in their property profiles.

Copolymers with an alternate sequence of monomers are alternating copolymers, whereas random copolymers do not follow any definite sequence in alignment patterns of the constituent monomers. Rarely may we expect any property gain from such compositions. Block copolymers are composed of long sequences (blocks) of one monomer unit, covalently bound to sequences of unlike type. Depending upon the chemical nature of the monomers block copolymers may be di-, tri-, tetra-, or even multi-block.

Generally, blocks are spontaneously self-assembled into a diversity of mesophases with the size scale governed by the chain dimensions. Dissimilar blocks exist as microdomains and exert their properties in the system. Thus glassy microdomains serve to anchor rubbery segments permitting the material to be used as melt processable adhesives and rubbers, i.e., thermoplastic elastomers such as SBS or ABS. Block copolymerization is one of the keys to achieve polymeric products with the desired property profiles.

The prime techniques for polymer modifications are grafting, crosslinking, blending, and composite formation, which are all multicomponent polymer systems. Such materials have attracted considerable attention in the industrial field as they combine a variety of functional components in a single material. Micro- and macrophase separation directly affect the physical and chemical properties in such multicomponent polymers. Graft copolymers are branched macromolecules in which the branches are of a different type from the backbone. They have a variety of potential applications resulting from the wide range of properties available when different polymer chains are connected to form hybrid branched macromolecules.

Multidirectional chain extension of polymers leading to the formation of network structures may be defined as crosslinking and viewed as a stabilization process. Crosslinking may result either through the polymerization of monomers with functionality greater than 2 (by condensation mode) or by covalent bonding between preformed polymer molecules accomplished by irradiation, sulfur vulcanization, or miscellaneous chemical reactions. Crosslinking restricts chains from sliding past one another and generates elasticity in an amorphous polymer. It makes a polymer more resistant to heat, light, and other physical agencies, giving it a high degree of dimensional stability, mechanical strength,

and chemical and solvent resistance. The effects of crosslinking on the physical properties of the polymers are primarily influenced by the degree of crosslinking, the regularity of the network formed, and the presence and absence of crystallinity in the polymer. For crystalline polymers there may be a reduction in crystallinity with a low degree of crosslinking as it hinders chain orientation, and the polymer may become softer, more elastic, and have a lower melting point. Crosslinking changes the local molecular packing and leads to a decrease in free volume. This is reflected in an enhancement of glass transition temperature. Improvement in creep behavior also results from crosslinking as it restricts the viscous flow. Hence for property synergism crosslinking is unavoidable in the present arena of polymers.

A macroscopically homogeneous mixture of two or more different polymers may be defined as a polymer blend. The blending of polymers provides a means of producing new materials, which combine the useful properties of all the constituents. Most of the polymers are immiscible. Hence the combination of two arbitrary polydispersed polymers (quasi-binary mixture) exhibits neither a true two-phase nor a single-phase structure. It may appear to have a two-phase morphological pattern whereby both phases contain a different and finite concentration of each polymer or it may have multiphase structure. In both the cases, no definite interface exists between the two adjacent phases. The relative concentration of the constituents in different phases depends upon their intensity of mixing and solubility parameters. The ultimate behavioral pattern of polyblends depends upon extent of phase separation, nature of the predominant phase, character of the dispersed phase, and interaction between the component polymers. Most useful blends have the characteristics of uniform dispersion, i.e., fine discrete particles of one component being uniformly dispersed through the matrix of the other component.

It would be advantageous if the size and size distribution of the domains of the dispersed phase remain practically unaltered over long periods of time, from the conditions of blending to the conditions under which the blend is to be performed. The two main objectives of making polymer blends are to maintain a proper cost performance ratio and reinforcement of properties, i.e., compensation of the demerits of a polymer by blending it with a second one that is rich in the aspects lagging in the initial one. The technology of blending is now advancing at a rapid pace. New blends are constantly being developed and characterized, and blends with metallocene resins, liquid crystal polymers, and biodegradable resins are now available. Blending technology is also proving to be of use in plastics recycling.

A composite, as its name suggests, is made by combining two or more dissimilar materials in such a way that the resultant material is endowed with properties superior to any of its components. These components neither take part in the chemical reaction nor do they dissolve or completely merge with one another. Nevertheless, they remain strongly bonded together while maintaining an interface between one another and act in concert to give a much improved performance. In polymer composites, polymers that are the major

components contain different reinforcing materials such as glass fiber, carbon fiber, silica, or mica as minor components. Reinforcement results in increased tensile, flexural, compression, and impact strength; rigidity; size stability; fire retardancy; corrosion resistance; electrical properties; and processibility. Polymer composites have versatile applications from the construction sector to commodity materials.

The two predominant modes of polymer modifications—grafting and cross-linking—are primarily considered in this book. The basic theories and exploration of these techniques in different sectors of human life are described in the following chapters.



---

# 2

---

## BASIC FEATURES AND TECHNIQUES

AMIT BHATTACHARYA AND PARAMITA RAY


### INTRODUCTION

“Physiosorption,” “grafting,” and “crosslinking” are the techniques by which the association of monomers and polymers is described. The term physiosorption signifies that it is related to physical attractive forces. The process is a reversible one and is achieved by the end functionalized polymers on to the solid surface or self-assembly of polymeric surfactants, where “grafting” can be described as the covalent attachment process and irreversible. Grafting can be accomplished by either “grafting to” or “grafting from” approaches. In “grafting to” approaches, functionalized monomers react with the backbone polymer to form the grafted one. On the other hand, “grafting from” is achieved by treating a substrate with some method to generate immobilized initiators followed by polymerization. High grafting density polymer also can be accomplished using this technique. The schematic presentation of all the processes is depicted in Figure 2.1A. The “crosslinking” is the association of polymers through a chemical bond. In most cases, the crosslinking is irreversible. It may be intra- and intermolecular (Figure 2.1B).

### TECHNIQUES USED

The grafting and crosslinking reactions can be performed by different pathways such as chemical or radiation. The important modes of reactions are discussed in the following.



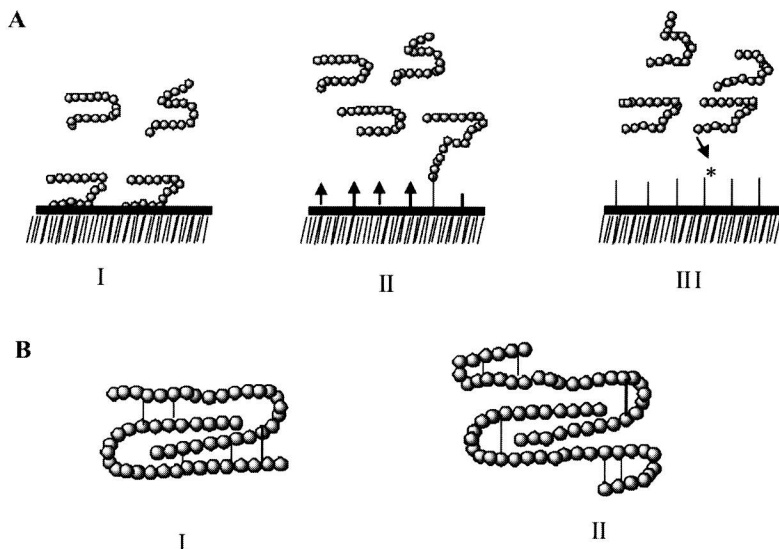

**Figure 2.1.** A. Schematic diagram of (I) physisorption, (II) grafting to, (III) grafting from. B. Schematic diagram of (I) intermolecular crosslinking and (II) intramolecular crosslinking.

## Chemical Routes


**By Redox Reaction** The redox reaction is the conventional one to produce the free radicals. There are different redox reagents in which radicals can be generated and relayed to the polymer so that the grafting reaction occurs. The features of the chemical reactions are as follows:

Features:

- Simple to carry out and no constraints in location point of view.
- Feasibility exists at room temperature and also in the aqueous solution.
- Extent of grafting can be controlled by tuning the reaction variables [viz. mixture composition (monomer/initiator), reaction time, and temperature].

The probable reaction pathways are described below.

(I) *With Fenton's reagent ( $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ )* A  $\text{HO}\cdot$  is generated by the reaction of  $\text{Fe}^{2+}$  and  $\text{H}_2\text{O}_2$



( $|\text{-H}$  is the polymer and  $\text{M}$  is the monomer)