

Grove

# Applied Atomic Spectroscopy



Plenum

# **Applied Atomic Spectroscopy**

**Volume 1**

**Edited by**

**E. L. Grove**

*IIT Research Institute  
Chicago, Illinois*

**Plenum Press · New York and London**

---

Library of Congress Cataloging in Publication Data

Main entry under title:

Applied atomic spectroscopy.

(Modern analytical chemistry)

Includes bibliographical references and index.

1. Atomic spectra. I. Grove, E. L., 1913-

QD96.A8A66

543'.085

77-17444

ISBN 0-306-33905-6 (v. 1)

ISBN 0-306-33906-4 (v. 2)

---

© 1978 Plenum Press, New York

A Division of Plenum Publishing Corporation

227 West 17th Street, New York, N.Y. 10011

All rights reserved

No part of this book may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, microfilming, recording, or otherwise, without written permission from the Publisher

Printed in the United States of America

# Contributors

James W. Anderson	Consultant, Pleasantville, New York
Reuven Avni	Nuclear Research Center, Negev, Beer Sheva, Israel
A. H. Gillieson	Retired from the Department of Energy, Mines and Resources, Mineral Sciences Division, Ottawa, Ontario, Canada
J. W. Mellichamp	U.S. Army Electronics Command (DRSEL-TL-EC), Fort Monmouth, New Jersey
R. H. Scott	National Physical Research Laboratory, Council for Scientific and Industrial Research, Pretoria, South Africa
A. Strasheim	National Physical Research Laboratory, Council for Scientific and Industrial Research, Pretoria, South Africa
Geoffrey Thompson	Woods Hole Oceanographic Institution, Woods Hole, Massachusetts

# Preface

From the first appearance of the classic *The Spectrum Analysis* in 1885 to the present the field of emission spectroscopy has been evolving and changing. Over the last 20 to 30 years in particular there has been an explosion of new ideas and developments. Of late, the aura of glamour has supposedly been transferred to other techniques, but, nevertheless, it is estimated that 75% or more of the analyses done by the metal industry are accomplished by emission spectroscopy. Further, the excellent sensitivity of plasma sources has created a demand for this technique in such divergent areas as direct trace element analyses in polluted waters.

Developments in the replication process and advances in the art of producing ruled and holographic gratings as well as improvements in the materials from which these gratings are made have made excellent gratings available at reasonable prices. This availability and the development of plane grating mounts have contributed to the increasing popularity of grating spectrometers as compared with the large prism spectrograph and concave grating mounts. Other areas of progress include new and improved methods for excitation, the use of controlled atmospheres and the extension of spectrometry into the vacuum region, the widespread application of the techniques for analysis of nonmetals in metals, the increasing use of polychrometers with concave or echelle gratings and improved readout systems for better reading of spectrographic plates and more efficient data handling.

Many of the far-reaching and on-going changes in industry and environment control would not have been possible without developments in spectroscopy, and committees of ASTM are continuing their work on evaluation and consolidation of procedures.

The available literature dealing with emission spectroscopy has until now been scattered among myriad sources and we in the field have long recognized an urgent need to gather the new ideas and developments together, in a convenient format. However, the enormous amount of work involved in preparing a comprehensive treatise on the subject has been a deterrent. Finally, this major collaborative effort was undertaken: *Applied Atomic Spectroscopy, Volumes 1*

*and 2* have been written by a group of authors, each of whom has an intimate and expert working knowledge of a special area within the discipline. Individual chapters are treatments in depth of new developments, placed within an historical perspective, in many instances incorporating much of the author's own experience.

I wish to extend my special thanks to all the collaborators for their cooperation and patience. The courtesy of the book and journal publishers who gave permission to reproduce figures and tables is gratefully acknowledged, with special thanks to the U.S. Geological Survey.

We also wish to thank the many practicing spectroscopists for their suggestions and help during the editing process, and last, though not least, Mrs. E. L. Grove and Nancy Robinson for editing, typing, and helping to keep detail in order.

*E. L. Grove*

# Contents of Volume 2

## Chapter 1

### Precious Metals

H. Jäger

## Chapter 2

### Petroleum Industry Analytical Applications of Atomic Spectroscopy

Bruce E. Buell

## Chapter 3

### Analytical Emission Spectroscopy in Biomedical Research

William Niedermayer

## Chapter 4

### Application of Spectroscopy to Toxicology and Clinical Chemistry

Eleanor Berman

# Applied Atomic Spectroscopy

Volume 1

# Contents

Contents of Volume 2 . . . . .	xv
--------------------------------	----

Chapter 1  
Photographic Photometry  
James W. Anderson

1.1	Introduction . . . . .	1
1.2	The Photographic Emulsion . . . . .	3
1.3	The Latent Image . . . . .	5
1.4	Evaluation of Photographic Image . . . . .	7
1.4.1	Limitation: The Emulsion . . . . .	9
1.4.2	Limitation: The Microphotometer . . . . .	11
1.5	Development Effects . . . . .	12
1.5.1	Eberhard Effect . . . . .	13
1.5.2	Intensity-Retardation-of-Development Effect . . . . .	15
1.5.3	Turbidity Effect . . . . .	17
1.5.4	Methods of Development . . . . .	18
1.6	Problems in Generating Latent Images . . . . .	19
1.6.1	Failure of Reciprocity . . . . .	20
1.6.2	Intermittency Effect . . . . .	22
1.6.3	Other Image Effects . . . . .	22
1.6.4	Halation Effect . . . . .	23
1.7	The Calibration Curve . . . . .	23
1.7.1	Methods for Obtaining Emulsion Calibration Data . . . . .	25
1.7.1.1	Rotating Step Sector . . . . .	25
1.7.1.2	Neutral Step Filters . . . . .	26
1.7.1.3	Homologous Lines . . . . .	26
1.7.1.4	Line Uniformity . . . . .	27
1.7.2	The Preliminary Curve . . . . .	29
1.7.2.1	Transmittance Preliminary Curve . . . . .	30
1.7.2.2	Density Preliminary Curve . . . . .	32

1.7.2.3	Seidel Preliminary Curve	33
1.7.2.4	Nonlinear Seidel Preliminary Curve	35
1.7.3	Final Emulsion Calibration Curve	37
1.7.3.1	The H and D Plot	37
1.7.3.2	Seidel Transformed Density	40
1.7.3.3	The Kaiser Transformed Density	41
1.7.4	Calibration Equations	43
1.7.4.1	The Kaiser Equation	43
1.7.4.2	Green's Equation	44
1.7.4.3	Seidel Equation of Anderson and Lincoln	45
1.7.4.4	Linearizing the H and D Curve	46
1.8	Analytical Curves	48
1.8.1	Background Corrections	49
1.8.1.1	Analysis of Residuals	52
1.8.2	Limitations on Line Readings	53
1.8.3	Calculating Boards	54
1.9	Spectral Data Processing	60
1.9.1	Computer Program for Microphotometer Readings	61
1.9.2	Use of Computer and Electronic Calculator	64
1.10	References	69

## Chapter 2

### Laser Emission Excitation and Spectroscopy

R. H. Scott and A. Strasheim

2.1	Introduction	73
2.2	Pulsed Laser Radiation	75
2.2.1	Characteristics	75
2.2.2	The Laser as a Radiation Source	77
2.2.2.1	Ruby	77
2.2.2.2	Neodymium-Doped Glass	77
2.2.3	Mode Structure	78
2.2.4	Q-Switching	79
2.2.5	Properties of the Focused Beam	80
2.3	Physical Aspects of the Laser Beam: Surface Interaction	82
2.4	Spectroscopy of Q-Switched Laser Plasmas	84
2.4.1	Time Resolution	84
2.4.2	Characteristics of Spectra	87
2.4.3	Influence of Atmospheric Pressure and Composition	89
2.4.4	Temperature	91
2.5	Spectrochemical Analysis	92
2.5.1	Influence of Power Density	92
2.5.2	Influence of Laser Wavelength	94

2.5.3	Single-Step (Laser Excitation) Analysis	96
2.5.4	Double-Step (Laser Plus Spark) Analysis	103
2.5.5	Qualitative and Quantitative Analyses of Various Samples	105
2.5.5.1	Minerals	105
2.5.5.2	Biological Samples	106
2.5.5.3	Briquetted Samples	107
2.5.5.4	Glass and Ceramics	109
2.5.5.5	Metals	109
2.5.6	Dependence of Crater Dimensions on Sample Material	110
2.5.7	Matrix Effects	112
2.5.8	Some Other Applications	113
2.6	Conclusion	113
2.7	References	114

### Chapter 3

#### Electrode Material and Design for Emission Spectroscopy

J. W. Mellichamp

3.1	Introduction	119
3.2	Background and History	120
3.3	Preparation and Manufacturing of Electrode Material	120
3.4	Electrode Design	123
3.5	Physical Properties of Graphite and Carbon	125
3.6	Direct-Current Arc Excitation	128
3.7	Effect on Direct-Current Arc Analysis	133
3.8	Spark Excitation	136
3.9	Miscellaneous Applications	137
3.10	Discussion	139
3.11	References	140

### Chapter 4

#### Behavior of Refractory Materials in a Direct-Current Arc Plasma: New Approaches for Spectrochemical Analysis of Trace Elements in Refractory Matrices

Reuven Avni

4.1	Introduction	143
4.1.1	Problem Description	143
4.1.1.1	Trace Elements in Refractory Materials	143
4.1.1.2	The Third Matrix	144
4.1.1.3	E.T.M. in the Electrodes	146
4.1.1.4	E.T.M. in Plasmas	147

4.1.2	Literature Survey	148
4.1.2.1	Chemical and Physical Separation	149
4.1.2.2	Buffers, Fluxes, and Internal Standards	150
4.1.2.3	Carrier Distillation	151
4.2	New Approaches	152
4.2.1	Mandelshtam Scheme	152
4.2.2	Volatilization Rate	153
4.2.2.1	The Chemical Method	155
4.2.2.2	The Wire Method	155
4.2.3	Axial Distribution of Line Intensity	159
4.3	Plasma Variables in the Presence of Refractory Materials	163
4.3.1	Voltage and Electric Fields	164
4.3.2	Temperature	170
4.3.2.1	Axial Distribution	173
4.3.2.2	Radial Distribution	175
4.3.3	Electron Density	177
4.3.3.1	Axial Distribution	180
4.3.3.2	Radial Distribution	182
4.3.4	Free Particle Concentration	183
4.3.4.1	The $dn_t/dt$ Model	185
4.3.4.2	Particle Velocity	187
4.3.4.3	Total Particle Concentration of the Third Matrix	187
4.3.4.4	Particle Concentration of Trace Elements	189
4.3.5	Transport Phenomena	190
4.3.6	Material Balance of Plasma Particles	193
4.3.7	Layout for Direct Spectrochemical Analysis	196
4.3.7.1	Summary of the E.T.M.	196
4.3.7.2	General Method for Direct Spectrochemical Analysis	197
4.4	Analysis of Trace Elements in Refractory Materials	198
4.4.1	Apparatus, Operating Conditions, and Standards	198
4.4.1.1	Apparatus	198
4.4.1.2	Operating Conditions	198
4.4.1.3	Standard Sets	198
4.4.2	Uranium, Thorium, Zirconium, and Plutonium Oxides	199
4.4.2.1	Similarities between the Matrices	199
4.4.2.2	Matrix Factors in the Cathode Region	200
4.4.2.3	Analytical Results—Cathode Region	201
4.4.3	Rare Earth Oxides	206
4.4.3.1	Similarities between the Rare Earth Matrices	206
4.4.3.2	Matrix Factors in the Cathode Region	209
4.4.3.3	Analytical Results—Cathode Region	210
4.4.4	Rock Phosphate	212
4.4.4.1	The Third Matrix Elements	213

4.4.4.2	Standard and Sample Preparation	214
4.4.4.3	Analytical Results—Cathode Region	215
4.4.5	Silicate Rocks and Minerals	215
4.4.5.1	Volatilization Rate	217
4.4.5.2	Plasma Variables	219
4.4.5.3	Analytical Results—Central Region	220
4.4.6	Aluminum and Titanium Oxides	221
4.4.6.1	Volatilization Rate	226
4.4.6.2	Plasma Variables	226
4.4.6.3	Analytical Results—Cathode Region	227
4.4.7	Molybdenum and Tungsten Oxides	229
4.4.7.1	Volatilization Rate	229
4.4.7.2	Normalized Line Intensity	230
4.4.7.3	Analytical Results—Cathode Region	231
4.5	References	232

## Chapter 5

### Preparation and Evaluation of Spectrochemical Standards

A. H. Gillieson

5.1	Introduction	237
5.2	General Requirements	238
5.2.1	Physical Similarity	239
5.2.2	Chemical Similarity	239
5.2.3	High-Purity Constituents	239
5.2.4	Avoidance of Contamination during Preparation	240
5.2.5	Homogeneity	240
5.2.6	Physical Stability	240
5.2.7	Chemical Stability	240
5.2.8	Concentration Range	241
5.2.9	Analyses of Reference Standards	241
5.3	Powder Standards	242
5.3.1	Classes of Powder Standards	242
5.3.1.1	Synthetic Standards	242
5.3.1.2	Part Synthetic—Part Natural Standards	242
5.3.1.3	Natural Standards	243
5.3.2	Grinding and Mixing	244
5.3.3	Particle Size	246
5.3.4	Segregation	247
5.3.5	Typical Preparations of Powder Standards	247
5.4	Bulk (Solid) Standards	248
5.4.1	General Considerations	248

5.4.2	Typical Preparation of Bulk (Alloy) Standards	250
5.4.2.1	White Cast-Iron Standards	250
5.4.2.2	Copper Alloy Standards	254
5.4.2.3	Pure Copper Standards	256
5.5	Liquid Standards	257
5.6	Gaseous Standards	258
5.7	Analysis of Standards	259
5.7.1	Preliminary Physical Inspection	259
5.7.2	Preliminary Analysis	260
5.7.3	Microscopic or Metallographic Examination	260
5.7.4	Homogeneity Testing	261
5.7.4.1	Distribution Studies	263
5.7.4.2	Factorial Experiment to Determine the Significance of Differences between Molds and between Positions within Molds	263
5.7.4.3	Homogeneity within a Disc	264
5.7.4.4	Other Methods of Homogeneity Testing and Evaluation	265
5.7.5	Multiple Compositional Analysis	268
5.7.6	Statistical Evaluation of Results	268
5.7.7	Weighing and Evaluation of Analytical Results	269
5.7.8	Final Certification	269
5.8	Conclusion	271
5.9	References	271

## Chapter 6

### Applications of Emission and X-Ray Spectroscopy to Oceanography

Geoffrey Thompson

6.1	Introduction	273
6.2	Seawater	275
6.3	Marine Organisms	280
6.4	Marine Sediments	288
6.5	Summary	297
6.6	References	298

Author Index	301
--------------	-----

Subject Index	309
---------------	-----

# Photographic Photometry

1

James W. Anderson

## 1.1 INTRODUCTION

Photographic photometry is the process of measuring the intensity of radiant energy of specific wavelengths in spectra recorded on a photographic emulsion. Since the formation of a spectrogram takes a finite amount of time, the measurement is more properly the integration of intensity, or exposure.

Photography has played a major role in the development of spectroscopy and spectrochemical analyses. In his studies of the darkening effect of silver chloride by the sun's spectrum, Ritter<sup>(1)</sup> in 1803 noted that the maximum darkening action was just outside the visible spectrum—hence the discovery of the ultraviolet region. Shortly after the development of the Daguerreotype process in 1839,<sup>(2,3)</sup> which used sodium thiosulfate as the fixing agent, both Becquerel<sup>(4)</sup> in 1842 and Draper<sup>(5)</sup> in 1842 and 1843 obtained photographs of the solar spectrum.

The next important advance in photography was the development by Maddox<sup>(2)</sup> in 1871 of the dry gelatine plate, which very quickly found widespread use in spectroscopy. Its availability made possible the much improved wavelength measurements and improved catalogs of spectra, typified by Rowland's work<sup>(6,7)</sup> published in 1887 and 1893. This subsequently led to the wide use of the spectrograph.

Today, photography is one of the four methods for detecting and measuring radiant energy, the other three being photoelectric, visual, and thermoelectric or radiometric. Some characteristics of these four methods are compared in Table 1.1. Wavelength range in the table refers to the spectral region for which the method is useful. Contrast is the general slope of the curve in which the response of the detector is plotted as a function of the quantity of radiant energy, while linearity refers to how closely this plot approaches a straight line.

Table 1.1 Summary of Methods for the Measurement of Spectral Intensities (Radiant Energy)

Method	Wavelength range (Å)	Contrast	Linearity	Neutrality	Cumulative	Panoramic
Photographic	10–11,000	High	Poor	Poor	Good	Excellent
Photoelectric	10–40,000	High	Good	Poor	Fair	None
Visual	3,900–7,500	High	Very poor	Poor	None	Limited
Thermoelectric	9,000–10 <sup>7</sup>	Low	Excellent	Excellent	None	None

A detector with high contrast is more sensitive to small changes of signal level but is likely to have a smaller dynamic range or latitude than a detector with low contrast. A detector is said to be highly neutral if the differences in its response to radiant energy of different wavelengths are negligible; that is, it responds in the same manner to the energy of one wavelength as to that of another. Because photographic emulsions have poor neutrality and are also nonlinear in response, they often require different calibrations in different wavelength regions. This is illustrated in Fig. 1.1 as shown by Harrison *et al.*<sup>(8)</sup> The cumulative property refers to the ability of the receptor to sum up exceedingly low intensities of light by increasing the time of exposure, while the panoramic property means the ability of a photographic emulsion to simultaneously record different wavelengths of radiant energy on different parts of the plate or film.

Pictorial photography is concerned with the linear recording of visually perceived illumination levels of objects under a heterochromatic light, whereas photographic photometry of the spectrum requires precise quantitative comparisons of much fainter and essentially monochromatic beams of radiation. The high sensitivity to small changes of signal level and the cumulative and panoramic properties of the emulsion are important for photometry, but linear recording (which can be realized only over a limited exposure range) is not. Important advantages of photographic photometry include the integration of light from sources of time-varying brightness and production of a permanent record.

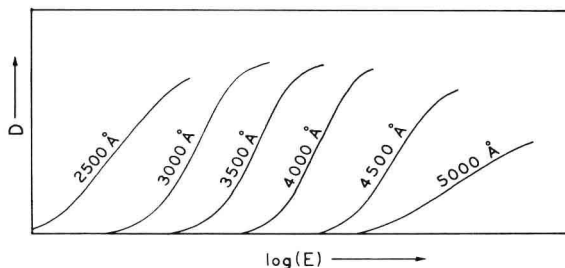


Fig. 1.1 Calibration curves for different wavelengths. The same scale, but different origins, were used to prevent overlap. (From Harrison *et al.*<sup>(8)</sup>)

## 1.2 THE PHOTOGRAPHIC EMULSION

The photographic emulsion is a thin layer of gelatin containing a suspension of very fine, light-sensitive silver halide crystals or grains. While the gelatin is in the liquid state, it is coated on glass or on cellulose acetate or polyester base and allowed to dry.\* Glass plates have an advantage with respect to dimensional stability but are restricted to spectrographs with flat or moderately curved focal planes. With standard plate widths of 2 and 4 in., they also provide more area for accepting a greater number of spectrograms, which permits more latitude in including exposures of standard samples for direct comparison to unknown samples. Although film is subject to expansion and contraction and presents some mechanical problems in processing and in being held flat in microphotometers, it can readily be bent to steeply curved focal planes. Film also avoids the obvious breakage damage to which glass is subject. In general, the emulsion layer on glass plates is slightly thicker than on film, which tends to make them more sensitive. On the other hand, the emulsions on film products have a thin clear gelatin overcoat of about  $1\text{ }\mu\text{m}$  for protection against abrasion and handling. Kodak<sup>(9)</sup> specifically recommends that the emulsion surface of plates are not to be wiped, because they are very soft when wet.

The light-sensitive material is a mixture of silver bromide with some silver iodide and traces of nucleating compounds. The size of these crystals or grains is carefully controlled within narrow limits because many properties of an emulsion are grain-size-dependent. The average grain size may vary from about  $5\text{ }\mu\text{m}$  in diameter for fast emulsions to submicroscopic for the slow Lippman emulsions. In general, the larger the average grain size, the more sensitive the film (partly because larger grains intercept more of the incident energy per grain) and the lower the contrast of the emulsion. The converse is also true, and thus one can expect that a fine-grained emulsion is generally slow with high contrast. This natural association of emulsion characteristics is unfortunate because the most desirable emulsion should have the finest grain possible to provide sharp resolution and yet be fast at the same time.

Another characteristic of an emulsion is the dynamic range over which it responds to radiation. The logarithm of the useful dynamic range or *latitude* varies inversely with the *contrast* or gamma of the emulsion. Both latitude and contrast also depend upon the minimum number of quanta a grain must absorb before it becomes developable and upon the dispersion of grain sizes about the average grain size of the emulsion. This is illustrated in Fig. 1.2, in which curve 2 represents a low-speed emulsion with high contrast, short latitude, and relatively poor sensitivity.

\*In some special emulsions, more than one such coating may be applied. If two or more coatings are applied, they usually differ in grain size and sensitivity. The purpose of this procedure is to extend the dynamic range for visual photography.