The background of the book cover is a dark, abstract composition featuring vibrant, multi-colored light streaks in shades of blue, orange, red, and yellow. These streaks radiate from a central point, creating a sense of dynamic energy and optical phenomena. In the upper left corner, there is a solid white rectangular box.

Principles of Optics for Engineers

Diffraction and Modal Analysis


WILLIAM S.C. CHANG

Principles of Optics for Engineers

Diffraction and Modal Analysis

BY WILLIAM S. C. CHANG

University of California, San Diego

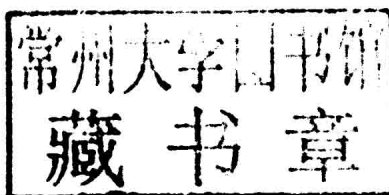

CAMBRIDGE
UNIVERSITY PRESS

CAMBRIDGE
UNIVERSITY PRESS

University Printing House, Cambridge CB2 8BS, United Kingdom

Cambridge University Press is part of the University of Cambridge.

It furthers the University's mission by disseminating knowledge in the pursuit of education, learning and research at the highest international levels of excellence.

www.cambridge.org

Information on this title: www.cambridge.org/9781107074903

© Cambridge University Press 2015

This publication is in copyright. Subject to statutory exception and to the provisions of relevant collective licensing agreements, no reproduction of any part may take place without the written permission of Cambridge University Press.

First published 2015

A catalog record for this publication is available from the British Library

Library of Congress Cataloging in Publication data

Chang, William S. C. (William Shen-chie), 1931–

Principles of optics for engineers: diffraction and modal analysis / by William S. C. Chang, University of California, San Diego.

pages cm

ISBN 978-1-107-07490-3

1. Optical engineering. 2. Diffraction. 3. Modal analysis. I. Title.

TA1520.C47 2015

535–dc23

2014042202

ISBN 978-1-107-07490-3 Hardback

Additional resources for this publication at www.cambridge.org/9781107074903

Cambridge University Press has no responsibility for the persistence or accuracy of URLs for external or third-party internet websites referred to in this publication, and does not guarantee that any content on such websites is, or will remain, accurate or appropriate.

Principles of Optics for Engineers

Uniting historically different approaches by presenting optical analyses as solutions of Maxwell's equations, this unique book enables students and practicing engineers to fully understand the similarities and differences between the various methods.

The book begins with a thorough discussion of plane wave analysis, which provides a clear understanding of optics without considering boundary condition or device configuration. It then goes on to cover diffraction analysis, including a rigorous analysis of TEM waves using Maxwell's equations, and the use of Gaussian beams to analyze different applications. Modes of simple waveguides and fibers are also covered, as well as several approximation methods including the perturbation technique, the coupled mode analysis, and the super mode analysis. Analysis and characterization of guided wave devices, such as power dividers, modulators, and switches, are presented via these approximation methods.

With theory linked to practical examples throughout, it provides a clear understanding of the interplay between plane wave, diffraction, and modal analysis, and how the different techniques can be applied to various areas such as imaging, spectral analysis, signal processing, and optoelectronic devices.

William S. C. Chang is an Emeritus Professor of the Department of Electrical and Computer Engineering, University of California, San Diego (UCSD). After receiving his Ph.D. from Brown University in 1957, he pioneered maser and laser research at Stanford University, and he has been involved in guided-wave teaching and research at Washington University and UCSD since 1971. He has published over 200 technical papers and several books, including *Fundamentals of Guided-Wave Optoelectronic Devices* (Cambridge, 2009), *Principles of Lasers and Optics* (Cambridge, 2005) and *RF Photonic Technology in Optical Fiber Links* (Cambridge, 2002).

Contents

	Introduction	1
1	Optical plane waves in an unbounded medium	4
1.1	Introduction to optical plane waves	4
1.1.1	Plane waves and Maxwell's equations	4
	(a) The y -polarized plane wave	5
	(b) The x -polarized plane wave	6
1.1.2	Plane waves in an arbitrary direction	7
1.1.3	Evanescent plane waves	9
1.1.4	Intensity and power	9
1.1.5	Superposition and plane wave modes	10
	(a) Plane waves with circular polarization	10
	(b) Interference of coherent plane waves	10
	(c) Representation by summation of plane waves	11
1.1.6	Representation of plane waves as optical rays	13
1.2	Mirror reflection of plane waves	14
1.2.1	Plane waves polarized perpendicular to the plane of incidence	14
1.2.2	Plane waves polarized in the plane of incidence	15
1.2.3	Plane waves with arbitrary polarization	15
1.2.4	The intensity	15
1.2.5	Ray representation of reflection	15
1.2.6	Reflection from a spherical mirror	16
1.3	Refraction of plane waves	17
1.3.1	Plane waves polarized perpendicular to the plane of incidence	17
1.3.2	Plane waves polarized in the plane of incidence	19
1.3.3	Properties of refracted and transmitted waves	20
	(a) Transmission and reflection at different incident angles	20
	(b) Total internal reflection	21
	(c) Refraction and reflection of arbitrary polarized waves	21
	(d) Ray representation of refraction	21
1.3.4	Refraction and dispersion in prisms	22
	(a) Plane wave analysis of prisms	22

	(b) Ray analysis of prisms	24
	(c) Thin prism represented as a transparent layer with a varying index	24
1.3.5	Refraction in a lens	25
	(a) Ray analysis of a thin lens	25
	(b) Thin lens represented as a transparency with varying index	27
1.4	Geometrical relations in image formation	28
1.5	Reflection and transmission at a grating	30
1.6	Pulse propagation of plane waves	31
	Chapter summary	32
2	Superposition of plane waves and applications	34
2.1	Reflection and anti-reflection coatings	34
2.2	Fabry–Perot resonance	37
2.2.1	Multiple reflections and Fabry–Perot resonance	37
2.2.2	Properties of Fabry–Perot resonance	39
2.2.3	Applications of the Fabry–Perot resonance	41
	(a) The Fabry–Perot scanning interferometer	41
	(b) Measurement of refractive properties of materials	42
	(c) Resonators for filtering and time delay of signals	43
2.3	Reconstruction of propagating waves	43
2.4	Planar waveguide modes viewed as internal reflected plane waves	46
2.4.1	Plane waves incident from the cladding	46
2.4.2	Plane waves incident from the substrate	48
	(a) Incident plane waves with $\sin^{-1}(n_c/n_s) < \theta_s < \pi/2$	48
	(b) Incident plane waves with $0 < \theta_s < \sin^{-1}(n_c/n_s)$	48
2.4.3	Plane waves incident within the waveguide: the planar waveguide modes	48
2.4.4	The hollow dielectric waveguide mode	50
	Chapter summary	51
3	Scalar wave equation and diffraction of optical radiation	53
3.1	The scalar wave equation	54
3.2	The solution of the scalar wave equation: Kirchhoff's diffraction integral	55
3.2.1	Kirchhoff's integral and the unit impulse response	57
3.2.2	Fresnel and Fraunhofer diffractions	57
3.2.3	Applications of diffraction integrals	58
	(a) Far field diffraction pattern of an aperture	58
	(b) Far field radiation intensity pattern of a lens	60

	(c) Fraunhofer diffraction in the focal plane of a lens	62
	(d) The lens viewed as a transformation element	65
3.2.4	Convolution theory and other mathematical techniques	65
	(a) The convolution relation	66
	(b) Double slit diffraction	66
	(c) Diffraction by an opaque disk	67
	(d) The Fresnel lens	67
	(e) Spatial filtering	67
	Chapter summary	71
4	Optical resonators and Gaussian beams	73
4.1	Integral equations for laser cavities	74
4.2	Modes in confocal cavities	75
4.2.1	The simplified integral equation for confocal cavities	75
4.2.2	Analytical solutions of the modes in confocal cavities	77
4.2.3	Properties of resonant modes in confocal cavities	78
	(a) The transverse field pattern	78
	(b) The resonance frequency	79
	(c) The orthogonality of the modes	79
	(d) A simplified analytical expression of the field	80
	(e) The spot size	81
	(f) The diffraction loss	81
	(g) The line width of resonances	82
4.2.4	Radiation fields inside and outside the cavity	83
	(a) The far field pattern of the TEM modes	84
	(b) A general expression for the TEM _{lm} Gaussian modes	84
	(c) An example to illustrate confocal cavity modes	85
4.3	Modes of non-confocal cavities	86
4.3.1	Formation of a new cavity for known modes of confocal resonator	86
4.3.2	Finding the virtual equivalent confocal resonator for a given set of reflectors	88
4.3.3	A formal procedure to find the resonant modes in non-confocal cavities	89
4.3.4	An example of resonant modes in a non-confocal cavity	91
4.4	The propagation and transformation of Gaussian beams (the ABCD matrix)	91
4.4.1	A Gaussian mode as a solution of Maxwell's equation	92
4.4.2	The physical meaning of the terms in the Gaussian beam expression	94
4.4.3	The analysis of Gaussian beam propagation by matrix transformation	95
4.4.4	Gaussian beam passing through a lens	97

4.4.5	Gaussian beam passing through a spatial filter	98
4.4.6	Gaussian beam passing through a prism	100
4.4.7	Diffraction of a Gaussian beam by a grating	102
4.4.8	Focusing a Gaussian beam	103
4.4.9	An example of Gaussian mode matching	104
4.4.10	Modes in complex cavities	105
4.4.11	An example of the resonance mode in a ring cavity	106
	Chapter summary	107
5	Optical waveguides and fibers	109
5.1	Introduction to optical waveguides and fibers	109
5.2	Electromagnetic analysis of modes in planar optical waveguides	112
5.2.1	The asymmetric planar waveguide	112
5.2.2	Equations for TE and TM modes	112
5.3	TE modes of planar waveguides	113
5.3.1	TE planar guided-wave modes	114
5.3.2	TE planar guided-wave modes in a symmetrical waveguide	115
5.3.3	The cut-off condition of TE planar guided-wave modes	117
5.3.4	An example of TE planar guided-wave modes	118
5.3.5	TE planar substrate modes	119
5.3.6	TE planar air modes	119
5.4	TM modes of planar waveguides	121
5.4.1	TM planar guided-wave modes	121
5.4.2	TM planar guided-wave modes in a symmetrical waveguide	122
5.4.3	The cut-off condition of TM planar guided-wave modes	123
5.4.4	An example of TM planar guided-wave modes	123
5.4.5	TM planar substrate modes	124
5.4.6	TM planar air modes	125
5.4.7	Two practical considerations for TM modes	126
5.5	Guided waves in planar waveguides	126
5.5.1	The orthogonality of modes	126
5.5.2	Guided waves propagating in the y - z plane	127
5.5.3	Convergent and divergent guided waves	127
5.5.4	Refraction of a planar guided wave	128
5.5.5	Focusing and collimation of planar guided waves	129
	(a) The Luneberg lens	129
	(b) The geodesic lens	129
	(c) The Fresnel diffraction lens	130
5.5.6	Grating diffraction of planar guided waves	131
5.5.7	Excitation of planar guided-wave modes	134
5.5.8	Multi-layer planar waveguides	135

5.6	Channel waveguides	135
5.6.1	The effective index analysis	136
5.6.2	An example of the effective index method	140
5.6.3	Channel waveguide modes of complex structures	141
5.7	Guided-wave modes in optical fibers	142
5.7.1	Guided-wave solutions of Maxwell's equations	142
5.7.2	Properties of the modes in fibers	144
5.7.3	Properties of optical fibers in applications	145
5.7.4	The cladding modes	146
	Chapter summary	146
6	Guided-wave interactions	148
6.1	Review of properties of the modes in a waveguide	149
6.2	Perturbation analysis	150
6.2.1	Derivation of perturbation analysis	150
6.2.2	A simple application of perturbation analysis: perturbation by a nearby dielectric	152
6.3	Coupled mode analysis	153
6.3.1	Modes of two uncoupled parallel waveguides	153
6.3.2	Modes of two coupled waveguides	154
6.3.3	An example of coupled mode analysis: the grating reflection filter	155
6.3.4	Another example of coupled mode analysis: the directional coupler	160
6.4	Super mode analysis	163
6.5	Super modes of two parallel waveguides	163
6.5.1	Super modes of two well-separated waveguides	164
6.5.2	Super modes of two coupled waveguides	164
6.5.3	Super modes of two coupled identical waveguides	166
	(a) Super modes obtained from the effective index method	166
	(b) Super modes obtained from coupled mode analysis	168
6.6	Directional coupling of two identical waveguides viewed as super modes	169
6.7	Super mode analysis of the adiabatic Y-branch and Mach-Zehnder interferometer	170
6.7.1	The adiabatic horn	170
6.7.2	Super mode analysis of a symmetric Y-branch	171
	(a) A single-mode Y-branch	171
	(b) A double-mode Y-branch	173
6.7.3	Super mode analysis of the Mach-Zehnder interferometer	173
	Chapter summary	175

7	Passive waveguide devices	176
7.1	Waveguide and fiber tapers	176
7.2	Power dividers	176
7.2.1	The Y-branch equal-power splitter	177
7.2.2	The directional coupler	177
7.2.3	The multi-mode interference coupler	178
7.2.4	The Star coupler	182
7.3	The phased array channel waveguide frequency demultiplexer	186
7.4	Wavelength filters and resonators	188
7.4.1	Grating filters	188
7.4.2	DBR resonators	189
7.4.3	The ring resonator wavelength filter	189
	(a) Variable-gap directional coupling	190
	(b) The resonance condition of the couple ring	191
	(c) Power transfer	192
	(d) The free spectral range and the Q-factor	192
7.4.4	The ring resonator delay line	194
	Chapter summary	195
8	Active opto-electronic guided-wave components	196
8.1	The effect of electro-optical χ	197
8.1.1	Electro-optic effects in plane waves	197
8.1.2	Electro-optic effects in waveguides at low frequencies	198
	(a) Effect of $\Delta\chi'$	198
	(b) Effect of $\Delta\chi''$	199
8.2	The physical mechanisms to create $\Delta\chi$	200
8.2.1	$\Delta\chi'$	200
	(a) The LiNbO ₃ waveguide	202
	(b) The polymer waveguide	203
	(c) The III–V compound semiconductor waveguide	203
8.2.2	$\Delta\chi''$ in semiconductors	205
	(a) Stimulated absorption and the bandgap	205
	(b) The quantum-confined Stark effect, QCSE	206
8.3	Active opto-electronic devices	211
8.3.1	The phase modulator	211
8.3.2	The Mach–Zehnder modulator	212
8.3.3	The directional coupler modulator/switch	213
8.3.4	The electro-absorption modulator	214
8.4	The traveling wave modulator	215
	Chapter summary	217
	Appendix	219
	Index	225

Introduction

Optics is a very old field of science. It has been taught traditionally as propagation, imaging, and diffraction of polychromatic natural light, then as interference, diffraction, and propagation of monochromatic light. Books like *Principles of Optics* by E. Wolf in 1952 gave a comprehensive and extensive in-depth discussion of properties of polychromatic and monochromatic light. Topics such as optical waveguide, fiber optics, optical signal processing, and holograms for laser light have been presented separately in more recent books. There appears to be no need for any new book in optics. However, there are several reasons to present optics differently, such as is done in this book.

Many contemporary optics books are concerned with components and instruments such as lenses, microscopes, interferometers, gratings, etc. Reflection, refraction, and diffraction of optical radiation are emphasized in these books. Other books are concerned with the propagation of laser light in devices and systems such as optical fibers, optical waveguides, and lasers, where they are analyzed more like microwave devices and systems. The mathematical techniques used in the two approaches are very different. In one case, diffraction integrals and their analysis are important. In the other case, modal analysis is important. Students usually learn optical analysis in two separate ways and then reconcile, if they can, the similarities and differences between them. Practicing engineers are also not fully aware of the interplay of these two different approaches. These difficulties can be resolved if optical analyses are presented from the beginning as solutions of Maxwell's equations and then applied to various applications using different techniques, such as diffraction or modal analysis.

The major difficulty to present optics from the solutions of Maxwell's equations is the complexity of the mathematics. Complex mathematical analyses often obscure the basic differences and similarities of the mathematical techniques and mask the understanding of basic concepts.

Optical device configurations vary from simple mirrors to complex waveguide devices. How to solve Maxwell's equations depends very much on the configuration of the components to be analyzed. The more complex the configuration, the more difficult the solution. Optics is presented in this book in the order of the complexity of the configuration in which the analysis is carried out. In this manner, the reasons for using different analytical techniques can be easily understood, and basic principles are not masked by any unnecessary mathematical complexity.

Optics in unbounded media is first presented in this book in the form of plane wave analysis. A plane wave is the simplest solution of Maxwell's equations. Propagation,

refraction, diffraction, and focusing of optical radiation, even optical resonators and planar waveguides, can be analyzed and understood by plane wave analysis. It leads directly to ray optics, which is the basis of traditional optics. It provides a clear demonstration and understanding of optics without considering boundary condition or device configuration. Even sophisticated concepts such as modal expansion can also be introduced using plane waves. Plane wave analysis is the focus of the first two chapters.

Realistically, wave propagation in bulk optical components involves a finite boundary such as a lens that has a finite aperture. Plane wave analysis can no longer be used in this configuration. However, in these situations, the waves are still transverse electric and magnetic (TEM). Therefore, TEM waves are rigorously analyzed using Maxwell's equations in Chapter 3. The diffraction analysis presented in Chapter 3 is identical to traditional optical analysis. Since applications of diffraction analysis are already covered extensively in existing optics books, only a few basic applications of diffraction theory are presented here. The distinct features of our presentation here are: (1) Both the TEM assumption of the Kirchoff's integral analysis and the relation between diffraction theory and Maxwell's equations are clearly presented. (2) Modern engineering concepts such as convolution, unit impulse response, and spatial filtering are introduced.

Diffraction integrals are again used to analyze laser cavities in the first part of Chapter 4, for three reasons: (1) Laser modes are used in many applications. (2) The diffraction analysis leads directly to the concept of modes. It is instructive to recognize that they are inter-related. (3) An important consequence of laser cavity analysis is that laser modes are Gaussian. A Gaussian mode retains its functional form not only inside, but also outside of the cavity.

The second part of Chapter 4 is focused on Gaussian beams and how different applications can be analyzed using Gaussian beams. Gaussian modes are also natural solutions of the Maxwell's equations. It constitutes a complete set. Just like any other set of modes, such as plane waves, any radiation can be represented as summation of Gaussian modes. When the diffraction integral is used in Chapter 3 to analyze waves propagating through components with finite apertures, the diffraction loss needs to be calculated by the Kirchoff's integral for each aperture. In comparison, the diffraction loss of a Gaussian beam propagating through an aperture can be calculated without any integration. Therefore, a Gaussian beam is used to represent TEM waves in many engineering applications.

Although TEM modes exist in solid-state and gas laser cavities, waves propagating in waveguides and fibers are no longer transverse electric and magnetic. Microwave-like modal analysis needs to be used to analyze optical devices that have dimensions of the order of optical wavelength.

Optical waveguides and fibers are dielectric devices. They are different from microwave devices. Microwave waveguides have closed metallic boundaries. The mathematical complexity of finding microwave waveguide modes is much simpler than that of optical waveguides.

The distinct features in the analysis of dielectric waveguides are: (1) There are analytical solutions for very few basic device configurations because of the complex boundary conditions. Analyses of practical devices need to be carried out by

approximation techniques. (2) There is a continuous set of radiation modes in addition to the discrete guided-wave modes. Any abrupt discontinuity will excite radiation modes. (3) The evanescent tail of the guided-wave modes not only reduces propagation loss, but also provides access to excite the modes by coupling through evanescent fields. (4) Multiple modes are often excited in devices. The performance of the device depends on what modes have been excited.

Because of the complexity of modal analysis of optical waveguides and fibers, it is presented here in four parts.

In the first part, modes of simple waveguides and fibers are discussed in Chapter 5. Analytical solutions for planar waveguides and step-index fiber are presented. Although these are not realistic devices, they are the only solutions that can be obtained from Maxwell's equations. Modes of these simple basic devices are very useful for demonstrating various properties of the guided waves. Approximation methods are then presented to discuss modes of realistic devices. For example, the effective index method is used here to analyze channel waveguides.

Guided-wave devices operate by mutual interactions among modes. These interactions need to be analyzed in the absence of exact solutions. Therefore, several approximation methods, the perturbation technique, the coupled mode analysis, and the super mode analysis, are presented in Chapter 6. The differences and similarities of the three methods are compared and explained. Examples in applications are used to demonstrate these techniques.

In the third and fourth parts, modal analyses of passive and active guided-wave devices are presented. Passive guided-wave devices function mainly as power dividers, wavelength filters, resonators, and wavelength multiplexers. In each of these system functions, there are several different devices that could be used. Thus, devices that perform the same system function are discussed and analyzed together. Their performance is compared.

Active devices utilize electro-optical effects of the electrical signals to operate. Discussion of active guided-wave devices is complex because there are different physical mechanisms involved. How these mechanisms work is reviewed. The electrical performance, as well as the optical performance of these devices are analyzed.

In summary, when optics are presented as solutions of Maxwell's equations, the inter-relation between plane wave, diffraction, and modal analysis becomes clear. For example, the use of modal analysis is not limited to waveguides and fibers. There can be modes and modal expansion in plane wave analysis, as well as in diffraction optics. As we learn optics step by step in the order of the mathematical complexity and device configuration, we learn optical analysis from various perspectives.

1 Optical plane waves in an unbounded medium

Engineers involved in design and the use of optical and opto-electronic systems are often required to analyze theoretically the propagation and the interaction of optical waves using different methods. Sometimes it is diffraction analysis; on other occasions, modal analysis. They are all solutions of Maxwell's equations, yet they appear to be very different. All optical analyses should be presented as solutions of Maxwell's equations so that the inter-relations between different analytical techniques are clear. In order to avoid unnecessary mathematical complexity, the simplest analysis should be presented first. In this book, optics will be presented first by plane wave analysis, followed by diffraction and modal analyses, in increasing order of complexity.

Plane waves are the simplest form of optical waves that can be derived rigorously from Maxwell's equations. Plane wave analysis can be used to derive ray analysis, which is the basis of traditional optics. It can be applied directly to analyze many optical phenomena such as refraction, reflection, dispersion, etc. It can also be used to demonstrate sophisticated concepts such as superposition, interference, resonance, guided waves, and Fourier optics. Plane wave analyses will be the focus of discussion in Chapters 1 and 2.

However, plane wave analysis cannot be used to analyze diffraction, laser modes, optical signal processing, and propagation in small optical components such as fibers and waveguides, etc. These analyses will be the focus of discussion in subsequent chapters.

1.1 Introduction to optical plane waves

Plane wave analysis is presented here in full detail, so that the mathematical derivations and details can be fully exhibited and the physical significances of these analyses are fully explained.

1.1.1 Plane waves and Maxwell's equations

All optical waves are solutions of the Maxwell's equations (assuming there are no free carriers),

$$\nabla \times \underline{E} = -\frac{\partial \underline{B}}{\partial t}, \quad \nabla \times \underline{H} = \frac{\partial \underline{D}}{\partial t} \quad (1.1)$$

Here \underline{E} is the electric field vector, \underline{H} is the magnetic field vector, \underline{D} is the displacement vector, and \underline{B} is the magnetic induction vector. For isotropic media,

$$\underline{B} = \mu \underline{H}, \quad \underline{D} = \epsilon \underline{E} \quad (1.2)$$

Let \underline{i}_x , \underline{i}_y , and \underline{i}_z , be unit vectors in the x , y , and z directions of an x - y - z rectangular coordinate system. Then \underline{E} , \underline{H} and the position vector \underline{r} can be written as

$$\underline{E} = E_x \underline{i}_x + E_y \underline{i}_y + E_z \underline{i}_z \quad \underline{H} = H_x \underline{i}_x + H_y \underline{i}_y + H_z \underline{i}_z \quad (1.3a)$$

$$\underline{r} = x \underline{i}_x + y \underline{i}_y + z \underline{i}_z \quad (1.3b)$$

A special solution of Eqs. (1.1) and (1.2) is a plane wave that has no amplitude variation transverse to its direction of propagation. If we designate the z direction as the direction of propagation, this means that

$$\frac{\partial}{\partial x} = 0 \quad \text{and} \quad \frac{\partial}{\partial y} = 0 \quad (1.4)$$

Substituting $\partial/\partial x = 0$ and $\partial/\partial y = 0$ into the $\nabla \times \underline{E}$ and $\nabla \times \underline{H}$ equations leads to two distinct groups of equations:

$$\frac{\partial E_y}{\partial z} = \mu \partial H_x / \partial t, \quad \frac{\partial H_x}{\partial z} = \epsilon \partial E_y / \partial t; \quad \text{or} \quad \frac{\partial E_y^2}{\partial z^2} = \mu \epsilon \frac{\partial^2}{\partial t^2} E_y \quad (1.5a)$$

and

$$\frac{\partial H_y}{\partial z} = -\epsilon \partial E_x / \partial t, \quad \frac{\partial E_x}{\partial z} = -\mu \partial H_y / \partial t; \quad \text{or} \quad \frac{\partial H_y^2}{\partial z^2} = \mu \epsilon \frac{\partial^2}{\partial t^2} H_y \quad (1.5b)$$

Clearly, these are two separate independent sets of equations. E_y and H_x are related only to each other, and H_y and E_x are related only to each other. Solutions of Eq. (1.5a) are plane waves with y polarization of the electric field (or x polarization in magnetic field). Solutions of Eq. (1.5b) are plane waves with x polarization in the electric field \underline{E} (or y polarization in magnetic field \underline{H}).

(a) The y -polarized plane wave

For a cw optical plane wave with a single angular frequency ω that has a time variation, $e^{j\omega t}$, and for lossless media (i.e. the medium has a real value of ϵ), there is a well-known solution of Eq. (1.5a) in the complex notation. It is

$$E_y = E_y^f e^{-j\beta z} e^{j\omega t}, \quad H_x = H_x^f e^{-j\beta z} e^{j\omega t}, \quad H_x^f = -\sqrt{\frac{\epsilon}{\mu}} E_y^f, \quad (1.6a)$$

where $\beta = \omega \sqrt{\mu \epsilon}$. The real time domain expression for the complex E_y shown in (1.6a) is $|E_y^f| \cos(\beta z - \omega t + \phi)$ where ϕ is the phase of $|E_y^f|$ at $z = 0$ and $t = 0$. The angular frequency ω is related to the optical frequency f by $\omega = 2\pi f$. This wave is known as a y -polarized forward propagating wave in the $+z$ direction. The phase of

E_y , i.e. $\beta z - \omega t = \beta(z - v_p t)$, is a constant when $z = v_p t$. Thus v_p is known as the phase velocity of the plane wave.

If the medium in which the plane wave propagates is free space, then $\varepsilon = \varepsilon_0$ and the free space phase velocity is $c_0 = 1/\sqrt{\mu\varepsilon_0} \approx 3 \times 10^8 \text{ m s}^{-1}$. In free space, the optical wave length for a frequency f is λ_0 , where $f\lambda_0 = c_0$. If the medium is a lossless dielectric material with a permittivity ε , then its index of refraction is $n = \sqrt{\varepsilon/\varepsilon_0}$, $\beta = n\beta_0 = n\omega\sqrt{\mu\varepsilon_0}$. If ε is a function of wavelength, the medium is said to be dispersive.

There is also a second solution for the same polarization of the electric field,

$$E_y = E_y^b e^{j\beta z} e^{j\omega t}, \quad H_x = H_x^b e^{j\beta z} e^{j\omega t}, \quad H_x^b = \sqrt{\frac{\varepsilon}{\mu}} E_y^b \quad (1.6b)$$

This solution is a backward propagating wave because the phase of E_y , i.e. $\beta z + \omega t = \beta(z + v_p t)$, at any time t is a constant when $z = -v_p t$ and $v_p = \omega/\beta$.

If the permittivity has a loss component, $\varepsilon = \varepsilon_r - j\varepsilon_\sigma$, then

$$\beta = \omega \sqrt{\mu(\varepsilon_r - j\varepsilon_\sigma)} = \beta_r - j\beta_\sigma \quad (1.7)$$

The phase velocity of light is now $v_p = c = \omega/\beta_r$. The amplitude of the plane wave decays as $e^{-\beta_\sigma z'}$ for forward waves and $e^{+\beta_\sigma z'}$ for backward waves. In comparison with the phase velocity of free space, the ratio of the phase velocities, c_0/c , is the effective refractive index of the plane wave, $n = c_0\beta_r/\omega = c_0/c$. The wavelength in the medium is $\lambda = \lambda_0/n$. In addition to β , or phase velocity, the loss of optical waves in the medium is an important consideration in applications.

(b) The x-polarized plane wave

A similar solution exists for the x-polarized electric field and H_y . For the forward wave,

$$H_y = H_y^f e^{-j\beta z} e^{j\omega t}, \quad E_x = E_x^f e^{-j\beta z} e^{j\omega t}, \quad E_x^f = \sqrt{\frac{\mu}{\varepsilon}} H_y^f \quad (1.8a)$$

For the backward wave,

$$H_y = H_y^b e^{+j\beta z} e^{j\omega t}, \quad E_x = E_x^b e^{+j\beta z} e^{j\omega t}, \quad E_x^b = -\sqrt{\frac{\mu}{\varepsilon}} H_y^b \quad (1.8b)$$

In summary, both equations (1.5a) and (1.5b) are second-order differential equations. Mathematically, each of them has two independent solutions, which are the forward and the backward propagating waves. However, Eqs. (1.5a) and (1.5b) are also two separate set of equations. The solution for Eq. (1.5a) describes a plane wave polarized in the y direction. The solution of Eq. (1.5b) describes a plane wave polarized in the x direction. Both waves have the same direction of propagation. $\underline{\beta}$ is usually designated as a propagation vector along the direction of propagation z that has magnitude β ,

$$\underline{\beta} = \beta \underline{i}_z, \quad \underline{z} = z \underline{i}_z, \quad \underline{\beta} \cdot \underline{z} = \beta z \quad (1.9)$$

The forward wave has $+\underline{\beta}$, the backward wave has $-\underline{\beta}$.