

**Junghuei Chen
John Reif (Eds.)**

LNCS 2943

DNA Computing

**9th International Workshop
on DNA Based Computers, DNA9
Madison, WI, USA, June 2003, Revised Papers**



Springer

Junghuei Chen John Reif (Eds.)

DNA Computing

9th International Workshop
on DNA Based Computers, DNA9
Madison, WI, USA, June 1-3, 2003
Revised Papers



Springer

Series Editors

Gerhard Goos, Karlsruhe University, Germany
Juris Hartmanis, Cornell University, NY, USA
Jan van Leeuwen, Utrecht University, The Netherlands

Volume Editors

Junghuei Chen
University of Delaware, Department of Chemistry and Biochemistry
Newark, DE 19716, USA
E-mail: junghuei@udel.edu

John Reif
Duke University, Department of Computer Science
Durham, NC 27708, USA
E-mail: reif@cs.duke.edu

Cataloging-in-Publication Data applied for

A catalog record for this book is available from the Library of Congress.

Bibliographic information published by Die Deutsche Bibliothek
Die Deutsche Bibliothek lists this publication in the Deutsche Nationalbibliografie;
detailed bibliographic data is available in the Internet at [<http://dnb.ddb.de>](http://dnb.ddb.de).

CR Subject Classification (1998): F.1, F.2.2, I.2.9, J.3

ISSN 0302-9743

ISBN 3-540-20930-1 Springer-Verlag Berlin Heidelberg New York

This work is subject to copyright. All rights are reserved, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, re-use of illustrations, recitation, broadcasting, reproduction on microfilms or in any other way, and storage in data banks. Duplication of this publication or parts thereof is permitted only under the provisions of the German Copyright Law of September 9, 1965, in its current version, and permission for use must always be obtained from Springer-Verlag. Violations are liable for prosecution under the German Copyright Law.

Springer-Verlag is a part of Springer Science+Business Media
springeronline.com

© Springer-Verlag Berlin Heidelberg 2004
Printed in Germany

Typesetting: Camera-ready by author, data conversion by DA-TeX Gerd Blumenstein
Printed on acid-free paper SPIN: 10985632 06/3142 5 4 3 2 1 0

Preface

Biomolecular computing is an interdisciplinary field that draws together molecular biology, DNA nanotechnology, chemistry, physics, computer science and mathematics. The annual international meeting on DNA-based computation has been an exciting forum where scientists of different backgrounds who share a common interest in biomolecular computing can meet and discuss their latest results. The central goal of this conference is to bring together experimentalists and theoreticians whose insights can calibrate each others' approaches. The 9th Annual International Meeting on DNA Based Computers was held during June 1–4, 2003 in the University of Wisconsin, Madison, USA. The meeting had 106 registered participants from 12 countries around the world.

On the first day of the meeting, we had three tutorials: the first was on self-assembly of DNA nano structures which focused on the basic techniques of using designed DNA nano molecules to be self-assembled onto larger structures for computational purposes. This tutorial was given by Hao Yan of Duke University. The second tutorial was given by Chengde Mao of Purdue University in which Dr. Mao presented basic DNA biochemistry that was designed for non experimentalists. The third tutorial was given by Max Garzon of the University of Memphis. Dr. Garzon gave a lecture on computational complexity which was tailored for non-computer scientists. The next three days were for invited plenary lectures, and regular oral and poster presentations. Invited plenary lectures were given by Helen Berman of Rutgers University (USA), Giancarlo Mauri of the University of Milan (Italy), Guenter von Kiedrowski of Ruhr University (Germany), and Sorin Istrail of Celera/Applied Biosystems.

The organizers sought to attract the most significant recent research with the highest impact on the development of the discipline. Papers and posters with new experimental results were particularly encouraged. Authors who wished their work to be considered for either oral or poster presentation were asked to select from one of two submission "tracks": Track A, Full Paper; Track B, One-Page Abstract.

For authors with late-breaking results, or who were submitting their manuscript to a scientific journal, a one-page abstract, rather than a full paper, could be submitted in Track B. Authors could (optionally) include a preprint of their full paper for consideration by the program committee. The program committee received 48 submissions in Track A, and 12 submissions in Track B. These submissions were then reviewed by the program committee members. In principle, four committee members were allocated for each submission. In considering the returned review reports, all discussions pertaining to the final decisions were made online by the program committee members. We finally selected 32 oral presentations from Tracks A and B. The oral and poster presentations included all areas that relate to biomolecular computing, such as algorithms and applications, analysis of laboratory techniques/theoretical models, computational

processes in vitro and in vivo, DNA-computing-based biotechnological applications, DNA devices, error evaluation and correction, in vitro evolution, models of biomolecular computing, molecular design, and simulation tools.

The editors would like to acknowledge the help of the conference's Program Committee in reviewing the submitted abstracts. The editors thank the Organizing Committee for their superb organization skill. We are grateful for the generous support and sponsorship of the conference by GenTel Corporation, DARPA (IPTO Biocomputation), NSF (CISE QUBIC ITR), and the Chemistry Department of the University of Wisconsin, Madison. Finally, the editors would like to thank all of the participants in the DNA9 conference for making it a wonderful experience. We hope that this volume has captured the spirit and exhilaration that we experienced at the conference.

December 2003

Junghuei Chen
John Reif

Organization

Program Committee

Martyn Amos	University of Exeter, UK
Junghuei Chen (Chair)	University of Delaware, USA
Russell Deaton	University of Arkansas, USA
Masami Hagiya	University of Tokyo, Japan
Natasha Jonoska	University of South Florida, USA
Lila Kari	University of Western Ontario, Canada
Laura Landweber	Princeton University, USA
Gheorghe Paun	Institute of Mathematics of the Romanian Academy, Romania
John Reif (Co-chair)	Duke University, USA
Ned Seeman	New York University, USA
Ehud Shapiro	Weizmann Institute of Science, Israel
Akira Suyama	University of Tokyo, Japan
Erik Winfree	California Institute of Technology, USA
Bernard Yurke	Bell Laboratories, Lucent Technologies, USA

Organizing Committee

Bryce Nelson	GenTel Corporation, Madison, Wisconsin, USA
Robert M. Corn	University of Wisconsin, Madison, Wisconsin, USA
Christine E. Heitsch	University of Wisconsin, Madison, Wisconsin, USA
Roberta M. Ostrander	University of Wisconsin, Madison, Wisconsin, USA
Lloyd M. Smith	University of Wisconsin, Madison, Wisconsin, USA

Sponsors

GenTel Corporation
DARPA (IIPTO Biocomputation)
NSF (CISE QUBIC ITR)
UW-Madison, Chemistry

Table of Contents

New Experimental Tools

A Lab-on-a-Chip Module for Bead Separation in DNA-Based Concept Learning <i>Hee-Woong Lim, Hae-Man Jang, Sung-Mo Ha, Young-Gyu Chai, Suk-In Yoo, and Byoung-Tak Zhang</i>	1
Parallel Translation of DNA Clusters by VCSEL Array Trapping and Temperature Control with Laser Illumination <i>Yusuke Ogura, Takashi Kawakami, Fumika Sumiyama, Akira Suyama, and Jun Tanida</i>	10
Chemical Switching and Molecular Logic in Fluorescent-Labeled M-DNA <i>Shawn D. Wettig, Grant A. Bare, Ryan J. S. Skinner, and Jeremy S. Lee</i> ..	19
RCA-Based Detection Methods for Resolution Refutation <i>In-Hee Lee, Ji Yoon Park, Young-Gyu Chai, and Byoung-Tak Zhang</i>	32

Theory

Word Design for Molecular Computing: A Survey <i>G. Mauri and C. Ferretti</i>	37
Time-Varying Distributed H Systems with Parallel Computations: The Problem Is Solved <i>Maurice Margenstern, Yurii Rogozhin, and Sergey Verlan</i>	48
Deadlock Decidability in Partial Parallel P Systems <i>Daniela Besozzi, Giancarlo Mauri, and Claudio Zandron</i>	55

Computer Simulation and Sequence Design

Languages of DNA Based Code Words <i>Nataša Jonoska and Kalpana Mahalingam</i>	61
Secondary Structure Design of Multi-state DNA Machines Based on Sequential Structure Transitions <i>Hiroki Uejima and Masami Hagiya</i>	74
Analyzing Secondary Structure Transition Paths of DNA/RNA Molecules <i>Hiroki Uejima and Masami Hagiya</i>	86

Self-Assembly and Autonomous Molecular Computation

Self-Assembled Circuit Patterns

Matthew Cook, Paul W.K. Rothmund, and Erik Winfree 91

One Dimensional Boundaries for DNA Tile Self-Assembly

Rebecca Schulman, Shaun Lee, Nick Papadakis, and Erik Winfree 108

Proofreading Tile Sets: Error Correction for Algorithmic Self-Assembly

Erik Winfree and Renat Bekbolatov 126

Experimental Solutions

A DNA-Based Memory with *In Vitro* Learning and Associative Recall

Junghuei Chen, Russell Deaton, and Yu-Zhen Wang 145

Efficiency and Reliability of Semantic Retrieval in DNA-Based Memories

Max H. Garzon, Kiran Bobba, and Andrew Neel 157

Nearest-Neighbor Thermodynamics of DNA Sequences with Single Bulge Loop

*Fumiaki Tanaka, Atsushi Kameda, Masahito Yamamoto,
and Azuma Ohuchi* 170

New Computing Models

Mathematical Considerations in the Design of Microreactor-Based DNA Computers

Michael S. Livstone and Laura F. Landweber 180

Towards a Re-programmable DNA Computer

Danny van Noort and Laura F. Landweber 190

In Vitro Translation-Based Computations

Yasubumi Sakakibara and Takahiro Hohsaka 197

Autonomous Biomolecular Computer Modeled after Retroviral Replication

Nao Nitta and Akira Suyama 203

Biomolecular Computing by Encoding of Regulated Phosphorylation-Dephosphorylation and Logic of Kinase-Phosphatase in Cells

Jian-Qin Liu and Katsunori Shimohara 213

Conformational Addressing Using the Hairpin Structure of Single-Strand DNA

*Atsushi Kameda, Masahito Yamamoto, Hiroki Uejima, Masami Hagiya,
Kensaku Sakamoto, and Azuma Ohuchi* 219

Author Index 225

A Lab-on-a-Chip Module for Bead Separation in DNA-Based Concept Learning

Hee-Woong Lim¹, Hae-Man Jang², Sung-Mo Ha², Young-Gyu Chai²,
Suk-In Yoo¹, and Byoung-Tak Zhang¹

¹Biointelligence Laboratory, School of Computer Science and Engineering
Seoul National University, Seoul 151-742, Korea
{hwlim, siyoo, btzhang}@bi.snu.ac.kr

²Department of Biochemistry and Molecular Biology,
Han-Yang University, Ansan, Kyongki-do 425-791, Korea
{hmjang, smha, ygchai}@bi.snu.ac.kr

Abstract. Affinity separation with magnetic beads is an important and widely used technique for DNA computing. We have designed and implemented an experimental lab-on-a-chip module for affinity-bead separation for DNA-based concept learning. Magnetic beads with DNA-probe sequences immobilized on their surface were used to select target strands, and these beads are restrained in the channel by a permanent magnet on top of the module. The separation process consists of two steps, i.e. hybridization and denaturation. We confirmed the separation process by a mixed solution that contains FITC modified strands, and measured the yield by UV spectrophotometer. The experimental results demonstrate a successful separation of the mixed DNA.

1 Introduction

Although one of the major attractions of DNA computing is the massive parallelism, the DNA computing operations involve a number of manual steps which require a large amount of time for bio-chemical reactions. This is one of the reasons that the application of DNA computing has been limited to the small-scale problems. Lab-on-a-chip technology provides a solution to this restriction. The miniaturization technology allows for integration and automation of experimental steps. It also reduces the amount of material necessary for the reaction and processing of the DNA. In addition, we are able to diminish the factors of errors inherent in DNA computing. Some examples for this technology can be found in [4,5,9,11,12].

Among many bio-lab techniques used in DNA computing, the affinity bead separation is an essential method for selecting the specific DNA strands. It served as a query method in a DNA-based database by associative search [2]. It was also used to check whether a path contains a specific city in HPP or TSP problems [1]. Moreover, Boolean value verification in the SAT problem [3] and attribute-value checking for hypothesis space refinement in the DNA-based concept learning [8] are accomplished by this technique.

However, in real experiment, the yield of this affinity separation is very low [6], and the information is lost or reduced while the operation is repeated. Thus, an amplification process such as PCR is indispensable to recover the information, which

is the amount of the DNA. Furthermore, the manual experiments of the affinity separation are certain to involve some errors. Braich et al. used a separation method with a gel-filled tube module to improve the efficiency in the SAT problem [2], and other related works have been done in relation with the micro-reactor [5,9,11,12].

In the previous work [8], we have suggested version space learning with DNA molecules as a concept learning method. This learning method can be implemented by repeated application of the affinity bead separation and this is described in the next section in detail. But, in practical implementation, this method needs much effort to repeat the same procedure, which may also suffer from low yield.

In this paper, we present the design of an affinity separation module, which performs the operation in a single straight channel. The magnetic beads with DNA probe sequences immobilized on their surface were used to select target strands, and the beads are restrained in the channel by a permanent magnet on top of the module. The separation process consists of hybridization and denaturation as in the manual experiment. We have implemented a prototype of this module and some experimental results are presented to verify its working process. This module can be used as well in other applications of the DNA computing which uses affinity separation.

This paper is organized as follows. In Section 2, the workflow of the bead separation for the DNA based concept learning is presented. Section 3 describes the detailed structure of the lab-on-a-chip (LOC) module for bead separation and fabrication process. At the same time some experimental results for this module are presented in Section 4. Finally, the conclusion and future work are given in Section 5.

2 Concept Learning on LOC

A detailed description on the original version space learning in silico can be found in [10], and the DNA based method is described in [8]. In this section, we explain how a network of the bead separation modules can organize the DNA based concept learning.

Given a training example e , learning proceeds by selecting all hypotheses, which are consistent with e . This process can be achieved through the affinity separation, which examines each attribute value, as is described in Fig. 1. Let T_n be the current version space¹, T_{n+1} the one after a training example e , and T^e a set of hypotheses that classify e as positive. In this paper, we assume three attributes (A, B, C) each of which has only two values. Attribute values are denoted by a lowercase letter with subscripts 1 and 2, and the “don't care symbol” is denoted by subscript 0. Each rectangle in Fig. 1 means an affinity separation module that divides the solution in the manner of whether each hypothesis has at least one of the attribute values, which are denoted in the rectangle. Positive selection means the selection of the DNA strands that hybridize with the bead, and negative selection means the selection of the ones that does not. In principle, the learning process for a single example can be accomplished with this process in Fig. 1.

¹ In this paper, the concept ‘version space’ is not the one that is maintained by special and general boundaries as in [2], but simply a set of hypotheses that are consistent with training examples.

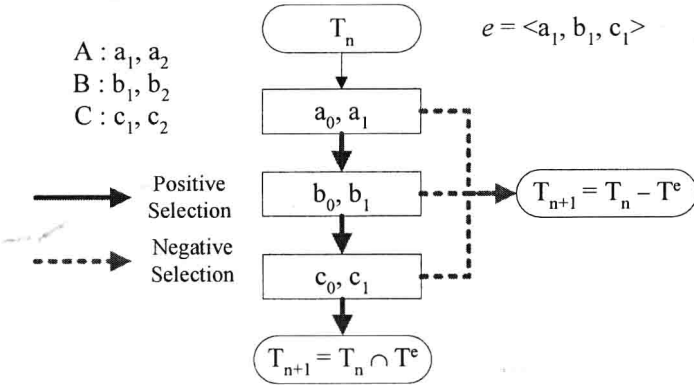


Fig. 1. Training process of DNA based version space learning for an example $\langle a_1, b_1, c_1 \rangle$

However, due to the possibility of false negatives in the selection process, the approach displayed above may be unreliable in the negative training examples. Therefore, this model is modified as follows for reliability, which uses only the positive selection as in Fig. 2.

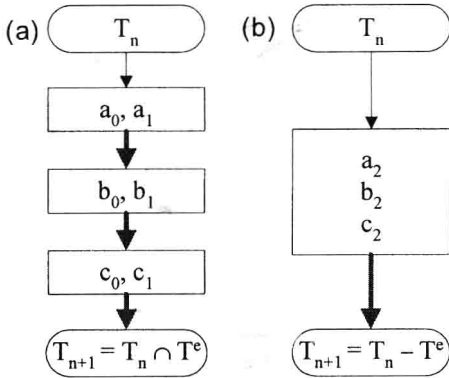


Fig. 2. Modified version of the learning process, which uses only positive selection for an example $\langle a_1, b_1, c_1 \rangle$. (a) is for a positive example, and (b) is for a negative example

Each learning step for a single training example can be implemented by the processes above, and therefore, the full learning process of the DNA based version space learning can be accomplished by networking the above training modules for the training examples.

3 LOC Module for Bead Separation

3.1 Layout of the Module

Basically, the module consists of a single straight channel, which is 2 mm in width, 100 μm in depth, and 44 mm in length. It should be miniaturized. This module uses

streptavidin coated magnetic beads to immobilize the probe sequences of which 5' ends are biotinylated. A permanent magnet is used to immobilize the magnetic beads. It is on top of the module and we can control the bead to flow or to make immobilized by the magnet.

To perform affinity separation, we need two steps, i.e. hybridization and denaturation as in the manual affinity separation. In the hybridization step, we first injected the mixed solution through the channel. This gave a rise to hybridize both target and probe DNA strands on the magnetic beads. After then, 0.1 M NaOH solution through the channel and the denaturated DNA strands pass through the channel.

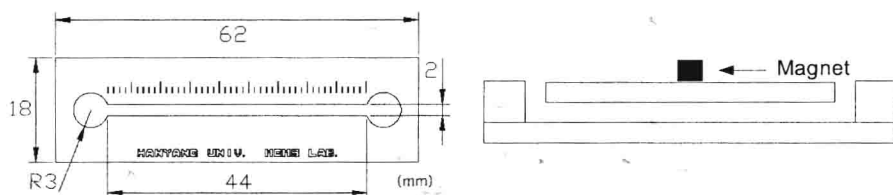


Fig. 3. Layout of the bead separation module. Top view (left) and side view (right)

3.2 Fabrication

The negative photo resistant SU-8 (Micro Chem, USA) was spun coated on the substrate 100 Si wafer (100 μm thick). And the air bubble of the coated SU-8 was removed by soft baking on a hot plate (65°C for 10 min, 95°C for 30 min). After installing and hardening the mask on the wafer, photolithography was performed on the MA-6 aligner. Finally this was cleaned with isopropyl alcohol after development by SU-8 developer. PDMS (polydimethylsiloxane, Corning, Sylgard 184) and curing agent were mixed (ratio of 10:1) and cured in oven (65°C, 4 h). PDMS replica was peeled off the mold, treated in O_2 plasma and bonded with a slide glass (Corning, #7740 Pyrex glass).

Two holes of 2 mm in diameter were drilled in the center of each reservoir port for inlet and outlet of solution. A magnet (CPG mini separator) seated on top of the device over channels was used to localize the beads in the detection area. It was $\varnothing 6 \text{ mm} \times 5 \text{ mm}$ with strength 12,200-Gauss 1,220 mTesla at the pole.

The summary of the above process is shown in Fig. 4.

4 Experimental Results

In this section, we describe some experimental results for the above module. Firstly, the magnetic beads with the probe sequences were prepared, which were then installed into the module. We confirmed the separation by FITC modified strands, as well as measuring the yield by UV spectrophotometer and then compared these results with those of the manual process.

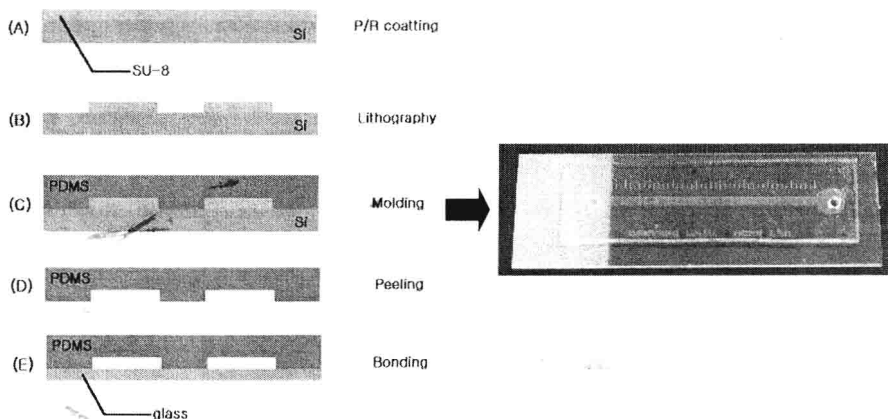


Fig. 4. Fabrication process and final module

4.1 Apparatus

Reagents were loaded into the fluid lines (silicon tube $\varnothing$ 1 mm) with 250 μ l, $\varnothing$ 2.30 mm Hamilton syringe and then pushed through the device syringe pump (KD scientific, AUXETAT). The device was mounted on an inverted fluorescence microscope for detection (NIKON, DIAPHOT 300). The microscope consisted of a halogen lamp for top illumination and a 100 W xenon lamp for sample illumination from the bottom. A charge coupled device (CCD) camera (IK-642F, Toshiba) was used to monitor the transport of magnetic beads and to measure fluorescence intensity. An interference filter cube was used to detect fluorescence signals. The bandwidth of the excitation filter was 459–498 nm and 512–559 nm for the emission filter. The images of the beads and fluorescence were acquired and analyzed with imaging software (Image tool 3, UTHSCSA).

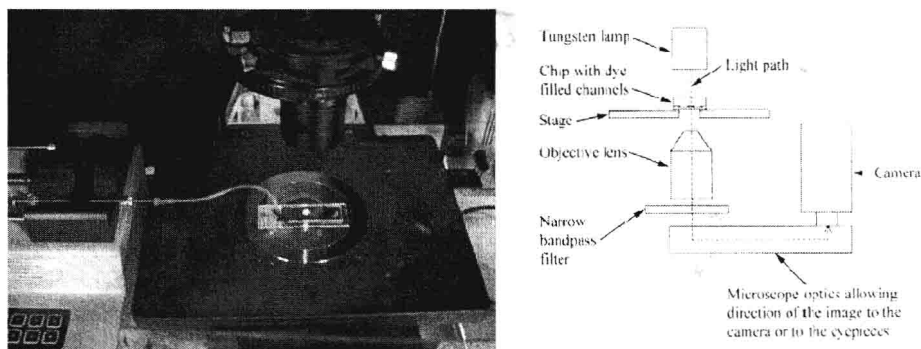


Fig. 5. Apparatus

4.2 Oligonucleotides

We used the sequence generator NACST/Seq [7] to design the DNA sequences for the experiment. When designing the oligonucleotide sequences, we considered the self-

homology and the H-measure to prevent cross hybridization. We designed three sequences of which 20 bp of 3' ends were selected as target subsequences and the probe sequences were determined from these subsequences. Table 1 shows the six sequences. All oligonucleotides were purchased from GenoTech (Daejeon, Korea) and obtained 5' FITC modified target strands for experiments to confirm the separation in the module in addition to the original three target strands. As well the probe sequences (No. 4~6 in Table 1) were 5' biotinylated for immobilization on the magnetic beads. As a result, we synthesized nine oligonucleotides for the experiment.

Table 1. Sequences of oligonucleotides used in the experiment

No.	Sequence		Tm (°C)	GC%
1	5' - AAACGGTCTTGTCTCGG	GGATAGGGAATGCTCGTGTT - 3'	70.1	51.4
2	5' - GTCGAGACAAGACCT	TGGCATATGTCTAAATAGAT - 3'	67.1	40.0
3	5' - GCGAATCTGATCGCT	CCAGCGAGGGCCGGTTCAC - 3'	77.7	65.7
4	5' - AACACGAGCATTCCTATCC	- 3'	57.3	50
5	5' - ATCTATTTAGACATATGCCA	- 3'	49.1	30
6	5' - GTGGAACCGGCCCTCGCTGG	- 3'	67.6	75

4.3 Probe Bead Preparation

Conjugation of biotinylated single-stranded DNA to M-280 beads (Dynal M-280 streptavidin coated, ϕ 2.8 μ m) was performed by using the following protocol. At first, 300 μ l of stock beads ($6\sim7 \times 10^8$ bead/ml) were washed three times in 200 μ l of Binding and Washing (B/W) buffer which consisted of 10 mM Tris, 1 mM EDTA, and 1 M NaCl, pH 7.5 and then diluted in 90 μ l of B/W buffer. And 10 μ l, 100 μ M biotinylated DNA solution was added to the beads solution and then incubated at room temperature for 15 min. After conjugation, the beads were washed with B/W buffer and diluted in 100 μ l of TE buffer, which was made up of 10 mM Tris, 1 mM EDTA, pH 8.0.

4.4 Separation

In this experiment, oligonucleotide No. 2 in Table 1 was the target strand, the mixed solution, which contained oligonucleotides No. 1~3 were used in separation.

Before the experiments, the module and the other devices were washed with ultrasonicator (Branson) for 5 min and 0.1 M NaOH. Then the inlet port of the module was connected to the syringe pump. TE buffer was mechanically pumped into the silicon tube (ϕ 1 mm) and flushed the device to remove out air bubbles. The dead volume in the tube and the connectors was 10 μ l in case of 250 μ l Hamilton syringe.

Detection of Separation with FITC Modified Oligonucleotides

The solution that contained probe beads (30 μ l of No. 5 probe attached bead + 70 μ l of TE buffer) was injected into the channels by using syringe pump at the velocity of 20 μ l/min. The mixed solution which contained each 10 μ l of No. 1~3 that are FITC modified and 170 μ l TE buffer, was injected into the channel by 5 μ l/min for 40 min.

After hybridization, unbounded oligonucleotides were washed with 100 μl TE buffer by 10 $\mu\text{l}/\text{min}$, 2 times, and the intensity of fluorescence signal was detected by CCD camera. For elution of the bound target strands, 200 μl of 0.1 M NaOH was injected into the channel (10 $\mu\text{l}/\text{min}$).

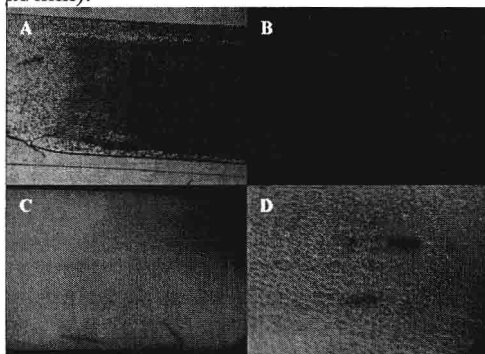


Fig. 6. Normal and fluorescent images of the beads in the module. Beads are localized in a channel by a magnet (a) Injection of M-280 bead in channel, 40X under halogen lamp, (b) 40X fluorescence image before hybridization with FITC conjugated probe, (c) 40X fluorescence image after an injection of the mixed solution which contains FITC modified target strands, (d) 100X fluorescence image, black dots are M-280 beads, green background is target solution

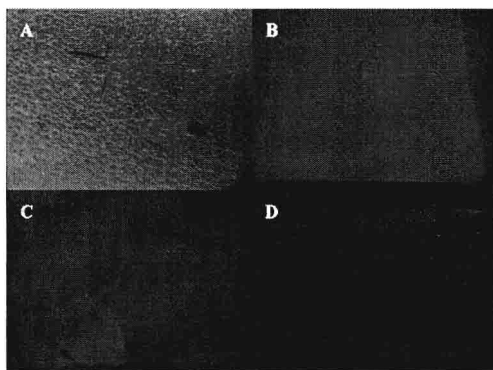


Fig. 7. Fluorescence images in washing and elution process (a) Before washing, (b) After washing, (c) Elution step: green narrow flow indicates the target oligonucleotide, (d) After completing the elution step

Figs. 6 and 7 show the separation process in the module. We can observe that the probe beads capture the target strands in hybridization step and that the strands are eluted in denaturation step.

Detection with UV Spectrophotometer

In the previous subsection, the solution, which contains the probe beads and the mixed solution were injected into the channel step by step, except that the mixed solution consisted of unmodified oligonucleotides. The waste solution of the

hybridization step containing unbounded strands was collected and then optical density of this solution was measured at 260 nm by UV spectrophotometer (UV-1601, SHIMADZU). The waste solution in the elution process was collected and optical density was measured to compare intensity profile before and after the separation.

In addition to this, we performed a manual separation process, using the same protocol without a separation module to compare the efficiency.

Table 2. Optical density of the solution at each step

<i>Concentration</i>	<i>Module</i>	<i>Manual</i>
Initial mixed solution	184.7 $\mu\text{g/ml}$	184.7 $\mu\text{g/ml}$
Waste in hybridization	164.8 $\mu\text{g/ml}$	146.1 $\mu\text{g/ml}$
Waste in denaturation	27.8 $\mu\text{g/ml}$	17.88 $\mu\text{g/ml}$

Table 2 is the result of the separation and the amount of the DNA strands in each step. As shown in the table, the yield is better than that of the manual process although the module misses out the much of the target strands.

5 Conclusion

In this work, we have shown that the DNA based concept learning can be performed by iterative affinity separations and also its concrete workflow has been presented. The learning process purely consists of the affinity separations, which examine each attribute value of the hypotheses in the current version space. Therefore, the network of the affinity separation modules can implement this learning scheme. For this purpose, we designed and implemented a prototype of a single LOC module for the affinity bead separation. The separation process was verified by several experiments, and the results show the separation process is performed more correctly and efficiently than manual work.

The yield of the affinity separation process can be improved further. The design or the strategy of the separation module needs to be improved to increase the efficiency of the probe beads. Undoubtedly, there may be other methods of immobilizing the probe DNA or the magnetic bead. Nevertheless, it is important that the probe sequences should be able to have more chances to hybridize with demanded target strands, and after all the proportion of the false negatives must be decreased as a result. The affinity separation used in [3] may be a good example. On the other hand, we may use the negative selection strategy to overcome the very low yield of the positive selection or the error of the positive selection in combination with a probability theory. However, we need a quantitative analysis of this process to support it. More sophisticated research about this affinity separation must be performed.

And more miniaturization, integration and automation are required for the real application. For example, Choi et al. have developed a technology to separate the magnetic beads in a micro-channel by electromagnet [4]. We may as well be able to control the beads in the module in combination with this method.

Acknowledgement

This research was supported by the Ministry of Commerce, Industry and Energy through the Molecular Evolutionary Computing (MEC) project, the NRL program from Korean Ministry of Science and Technology, and the Ministry of Education & Human Resources Development under the BK21-IT program. The ICT at Seoul National University provided the research facilities for this study.

References

- [1] L. M. Adleman, Molecular computation of solutions to combinatorial problems, *Science*, vol. 266, pages 1021-1024, 1994
- [2] Eric B. Baum. Building an associative memory vastly larger than the brain. *Science*, vol. 268, pages 583-585, April 28, 1995
- [3] R. S. Braich, N. Chelyapov, P. W. K. Rothmund, and L. Adleman, Solution of a 20-variable 3-SAT problem on a DNA computer, *Science*, 295, pages 499-502, 2002
- [4] J.-W. Choi, T. M. Liakopoulos, C.-H. Ahn, An on-chip magnetic bead separator using spiral electromagnets with semi-encapsulated permalloy, *Biosensors & Bioelectronics*, vol. 16, pages 409-416, 2001
- [5] Z. H. Fan, S. Mangru, R. Granzow, P. Heaney, W. Ho, Q. Dong, and R. Kumar, Dynamic DNA hybridization on a chip using paramagnetic beads, *Anal. Chem.*, vol. 71, pages 4851-4859, 1999
- [6] J. Khodor, and D. K. Gifford, The efficiency of sequence-specific separation of DNA mixtures for biological computing, *3rd Annual DIMACS Workshop on DNA Based Computers*, Philadelphia, Pennsylvania, June, 1997
- [7] D.-M. Kim, S.-Y. Shin, I.-H. Lee, and B.-T. Zhang, NACST/Seq: A sequence design system with multiobjective optimization, *DNA8 Lecture Notes in Computer Science*, vol. 2568, pages 242-251, 2003
- [8] H.-W. Lim, J.-E. Yun, H.-M. Jang, Y.-G. Chai, S.-I. Yoo, and B.-T. Zhang, Version space learning with DNA molecules, *DNA8 Lecture Notes in Computer Science*, vol. 2568, pages 143-155, 2003
- [9] J. S. McCaskill, R. Penchovsky, M. Gholke, J. Ackermann, and T. Rücker, Steady flow micro-reactor module for pipelined DNA Computations, *Proceedings of 6th International Meeting On DNA Based Computers*, pages 239-246, 2000
- [10] T. M. Mitchell, *Machine Learning*, 1997, McGraw-Hill
- [11] D. van Noort, F.-U. Gast, and J. S. McCaskill, DNA computing in microreactors, *Proceedings of 7th International Meeting on DNA Based Computers*, pages 128-137, 2001
- [12] R. Penchovsky, and J. S. McCaskill, Cascadable hybridisation transfer of specific DNA between microreactor selection modules, *DNA7 Lecture Notes in Computer Science*, vol. 2340, pages 46-56, 2002