

NONLINEAR
PHYSICAL
SCIENCE

32

Vladimir I. Nekorkin

Introduction to Nonlinear Oscillations 非线性振动理论导引




HIGHER EDUCATION PRESS

Vladimir I. Nekorkin

Introduction to Nonlinear Oscillations

非线性振动理论导引

With 137 figures

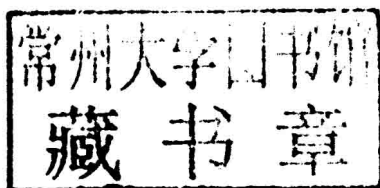

HIGHER EDUCATION PRESS

Author

Vladimir I. Nekorkin

Institute of Applied Physics of
the Russian Academy of Sciences

46 Uljanov str.

603950 Nizhny Novgorod

Russia

© 2015 HIGHER EDUCATION PRESS, 4 Dewai Dajie, 100011, Beijing, P. R. China

图书在版编目(CIP)数据

非线性振动理论导引 = Introduction to nonlinear oscillations:
英文 / (俄罗斯) 奈考尔金 (Nekorkin, V. I.) 著. -- 北京:
高等教育出版社, 2015. 4

(非线性物理科学 / 罗朝俊, (瑞典) 伊布拉基莫夫,
(墨) 阿弗莱诺维奇主编)

ISBN 978-7-04-042131-6

I. ①非… II. ①奈… III. ①非线性振动理论-研究
- 英文 IV. ①O322

中国版本图书馆CIP数据核字(2015)第054913号

策划编辑 王丽萍

责任编辑 王丽萍

封面设计 杨立新

责任印制 毛斯璐

出版发行 高等教育出版社
社 址 北京市西城区德外大街4号
邮政编码 100120
印 刷 北京中科印刷有限公司
开 本 787 mm × 1092 mm 1/16
印 张 16.75
字 数 230 千字
购书热线 010-58581118

咨询电话 400-810-0598
网 址 <http://www.hep.edu.cn>
<http://www.hep.com.cn>
网上订购 <http://www.landaco.com>
<http://www.landaco.com.cn>
版 次 2015 年 4 月第 1 版
印 次 2015 年 4 月第 1 次印刷
定 价 69.00 元

本书如有缺页、倒页、脱页等质量问题, 请到所购图书销售部门联系调换
版权所有 侵权必究
物 料 号 42131-00

NONLINEAR PHYSICAL SCIENCE

非线性物理科学

NONLINEAR PHYSICAL SCIENCE

Nonlinear Physical Science focuses on recent advances of fundamental theories and principles, analytical and symbolic approaches, as well as computational techniques in nonlinear physical science and nonlinear mathematics with engineering applications.

Topics of interest in *Nonlinear Physical Science* include but are not limited to:

- New findings and discoveries in nonlinear physics and mathematics
- Nonlinearity, complexity and mathematical structures in nonlinear physics
- Nonlinear phenomena and observations in nature and engineering
- Computational methods and theories in complex systems
- Lie group analysis, new theories and principles in mathematical modeling
- Stability, bifurcation, chaos and fractals in physical science and engineering
- Nonlinear chemical and biological physics
- Discontinuity, synchronization and natural complexity in the physical sciences

SERIES EDITORS

Albert C. J. Luo

Department of Mechanical and Industrial
Engineering
Southern Illinois University Edwardsville
IL 62026-1805, USA
Email: aluo@siue.edu

Nail H. Ibragimov

Department of Mathematics and Science
Blekinge Institute of Technology
S-371 79 Karlskrona, Sweden
Email: nib@bth.se

Valentin Afraimovich

San Luis Potosi University
IICO-UASLP, Av. Karakorum 1470
Lomas 4a Seccion, San Luis Potosi
SLP 78210, Mexico
Email: valentin@cactus.iico.uaslp.mx

INTERNATIONAL ADVISORY BOARD

Ping Ao

Eugene Benilov

Maurice Courbage

James A. Glazier

Jose Antonio Tenreiro Machado

Josep J. Masdemont

Sergey Prants

Jian Qiao Sun

Pei Yu

Jan Awrejcewicz

Eshel Ben-Jacob

Marian Gidea

Shijun Liao

Nikolai A. Magnitskii

Dmitry E. Pelinovsky

Victor I. Shrira

Abdul-Majid Wazwaz

Preface

At the foundation of this course material are lectures on a general course in the theory of oscillations, which were taught by the author for more than 20 years at the Faculty of Radiophysics at Nizhny Novgorod State University (NNSU).

The aim of the course was not only to express fundamental ideas and methods of the theory of oscillations as a science of evolutionary processes, but also to teach the audience the methods and techniques of solving specific (practical) problems.

The key role in forming this lecture course is played by qualitative methods of the theory of dynamical systems and methods of the theory of bifurcations, which follow the tradition of Nizhny Novgorod school of nonlinear oscillations. These methods are even used when solving simple problems, where, in principle, their use is not necessary. Such a way of presenting the following material allows us, first of all, to reveal the essence and fundamental principles of the methods, and, secondly, for the reader to develop the skills necessary to put them to use, which appears to be important for the transition to studying more complex problems.

The book is constructed in the form of lectures in accordance with the syllabus of the course “Theory of Oscillations” for the Faculty of Radiophysics at NNSU. Yet, the content of nearly every lecture in this book is expanded further than it is usually presented during the reading of a formal lecture. This makes it possible for the reader to gain additional knowledge on the subject. At the end of each lecture, there are test questions and problems for revision and independent study.

This text could also prove useful to undergraduate and graduate students specializing in the field of nonlinear dynamics, information systems, control theory, biophysics, and so on.

The author is grateful to the colleagues at the department of “Theory of Oscillations and Automated Control” for many useful discussions on the topics of this text and to the colleagues from the department of Nonlinear Dynamics at the Institute of Applied Physics of the Russian Academy of Sciences.

Nizhny Novgorod
October 2014

Vladimir I. Nekorkin

Contents

Preface *XI*

1	Introduction to the Theory of Oscillations	1
1.1	General Features of the Theory of Oscillations	1
1.2	Dynamical Systems	2
1.2.1	Types of Trajectories	3
1.2.2	Dynamical Systems with Continuous Time	3
1.2.3	Dynamical Systems with Discrete Time	4
1.2.4	Dissipative Dynamical Systems	5
1.3	Attractors	6
1.4	Structural Stability of Dynamical Systems	7
1.5	Control Questions and Exercises	8
2	One-Dimensional Dynamics	11
2.1	Qualitative Approach	11
2.2	Rough Equilibria	13
2.3	Bifurcations of Equilibria	14
2.3.1	Saddle-node Bifurcation	14
2.3.2	The Concept of the Normal Form	15
2.3.3	Transcritical Bifurcation	16
2.3.4	Pitchfork Bifurcation	17
2.4	Systems on the Circle	18
2.5	Control Questions and Exercises	19
3	Stability of Equilibria. A Classification of Equilibria of Two-Dimensional Linear Systems	21
3.1	Definition of the Stability of Equilibria	22
3.2	Classification of Equilibria of Linear Systems on the Plane	24
3.2.1	Real Roots	25
3.2.1.1	Roots λ_1 and λ_2 of the Same Sign	26
3.2.1.2	The Roots λ_1 and λ_2 with Different Signs	27
3.2.1.3	The Roots λ_1 and λ_2 are Multiples of $\lambda_1 = \lambda_2 = \lambda$	28
3.2.2	Complex Roots	29

3.2.3	Oscillations of two-dimensional linear systems	30
3.2.4	Two-parameter Bifurcation Diagram	30
3.3	Control Questions and Exercises	33
4	Analysis of the Stability of Equilibria of Multidimensional Nonlinear Systems	35
4.1	Linearization Method	35
4.2	The Routh–Hurwitz Stability Criterion	36
4.3	The Second Lyapunov Method	38
4.4	Hyperbolic Equilibria of Three-Dimensional Systems	41
4.4.1	Real Roots	41
4.4.1.1	Roots λ_i of One Sign	41
4.4.1.2	Roots λ_i of Different Signs	42
4.4.2	Complex Roots	43
4.4.2.1	Real Parts of the Roots λ_i of One Sign	44
4.4.2.2	Real Parts of Roots λ_i of Different Signs	45
4.4.3	The Equilibria of Three-Dimensional Nonlinear Systems	45
4.4.4	Two-Parameter Bifurcation Diagram	46
4.5	Control Questions and Exercises	49
5	Linear and Nonlinear Oscillators	53
5.1	The Dynamics of a Linear Oscillator	53
5.1.1	Harmonic Oscillator	54
5.1.2	Linear Oscillator with Losses	57
5.1.3	Linear Oscillator with “Negative” Damping	60
5.2	Dynamics of a Nonlinear Oscillator	61
5.2.1	Conservative Nonlinear Oscillator	61
5.2.2	Nonlinear Oscillator with Dissipation	68
5.3	Control Questions and Exercises	69
6	Basic Properties of Maps	71
6.1	Point Maps as Models of Discrete Systems	71
6.2	Poincaré Map	72
6.3	Fixed Points	75
6.4	One-Dimensional Linear Maps	77
6.5	Two-Dimensional Linear Maps	79
6.5.1	Real Multipliers	79
6.5.1.1	The Stable Node Fixed Point	80
6.5.1.2	The Unstable Node Fixed Point	81
6.5.1.3	The Saddle Fixed Point	82
6.5.2	Complex Multipliers	82
6.6	One-Dimensional Nonlinear Maps: Some Notions and Examples	84
6.7	Control Questions and Exercises	87

7	Limit Cycles	89
7.1	Isolated and Nonisolated Periodic Trajectories. Definition of a Limit Cycle	89
7.2	Orbital Stability. Stable and Unstable Limit Cycles	91
7.2.1	Definition of Orbital Stability	91
7.2.2	Characteristics of Limit Cycles	92
7.3	Rotational and Librational Limit Cycles	94
7.4	Rough Limit Cycles in Three-Dimensional Space	94
7.5	The Bendixson–Dulac Criterion	96
7.6	Control Questions and Exercises	98
8	Basic Bifurcations of Equilibria in the Plane	101
8.1	Bifurcation Conditions	101
8.2	Saddle-Node Bifurcation	102
8.3	The Andronov–Hopf Bifurcation	104
8.3.1	The First Lyapunov Coefficient is Negative	105
8.3.2	The First Lyapunov Coefficient is Positive	106
8.3.3	“Soft” and “Hard” Generation of Periodic Oscillations	107
8.4	Stability Loss Delay for the Dynamic Andronov–Hopf Bifurcation	108
8.5	Control Questions and Exercises	110
9	Bifurcations of Limit Cycles. Saddle Homoclinic Bifurcation	113
9.1	Saddle-node Bifurcation of Limit Cycles	113
9.2	Saddle Homoclinic Bifurcation	117
9.2.1	Map in the Vicinity of the Homoclinic Trajectory	117
9.2.2	Librational and Rotational Homoclinic Trajectories	121
9.3	Control Questions and Exercises	122
10	The Saddle-Node Homoclinic Bifurcation. Dynamics of Slow–Fast Systems in the Plane	123
10.1	Homoclinic Trajectory	123
10.2	Final Remarks on Bifurcations of Systems in the Plane	126
10.3	Dynamics of a Slow-Fast System	127
10.3.1	Slow and Fast Motions	128
10.3.2	Systems with a Single Relaxation	129
10.3.3	Relaxational Oscillations	130
10.4	Control Questions and Exercises	133
11	Dynamics of a Superconducting Josephson Junction	137
11.1	Stationary and Nonstationary Effects	137
11.2	Equivalent Circuit of the Junction	139
11.3	Dynamics of the Model	140
11.3.1	Conservative Case	140
11.3.2	Dissipative Case	141

11.3.2.1	Absorbing Domain	141
11.3.2.2	Equilibria and Their Local Properties	142
11.3.2.3	The Lyapunov Function	144
11.3.2.4	Contactless Curves and Control Channels for Separatrices	146
11.3.2.5	Homoclinic Orbits and Their Bifurcations	150
11.3.2.6	Limit Cycles and the Bifurcation Diagram	153
11.3.2.7	I–V Curve of the Junction	156
11.4	Control Questions and Exercises	158
12	The Van der Pol Method. Self-Sustained Oscillations and Truncated Systems	159
12.1	The Notion of Asymptotic Methods	159
12.1.1	Reducing the System to the General Form	160
12.1.2	Averaged (Truncated) System	160
12.1.3	Averaging and Structurally Stable Phase Portraits	161
12.2	Self-Sustained Oscillations and Self-Oscillatory Systems	162
12.2.1	Dynamics of the Simplest Model of a Pendulum Clock	163
12.2.2	Self-Sustained Oscillations in the System with an Active Element	166
12.3	Control Questions and Exercises	173
13	Forced Oscillations of a Linear Oscillator	175
13.1	Dynamics of the System and the Global Poincaré Map	175
13.2	Resonance Curve	180
13.3	Control Questions and Exercises	183
14	Forced Oscillations in Weakly Nonlinear Systems with One Degree of Freedom	185
14.1	Reduction of a System to the Standard Form	185
14.2	Resonance in a Nonlinear Oscillator	187
14.2.1	Dynamics of the System of Truncated Equations	188
14.2.2	Forced Oscillations and Resonance Curves	192
14.3	Forced Oscillation Regime	194
14.4	Control Questions and Exercises	195
15	Forced Synchronization of a Self-Oscillatory System with a Periodic External Force	197
15.1	Dynamics of a Truncated System	198
15.1.1	Dynamics in the Absence of Detuning	202
15.1.2	Dynamics with Detuning	203
15.2	The Poincaré Map and Synchronous Regime	205
15.3	Amplitude-Frequency Characteristic	207
15.4	Control Questions and Exercises	208

16	Parametric Oscillations	209
16.1	The Floquet Theory	210
16.1.1	General Solution	210
16.1.2	Period Map	213
16.1.3	Stability of Zero Solution	214
16.2	Basic Regimes of Linear Parametric Systems	216
16.2.1	Parametric Oscillations and Parametric Resonance	217
16.2.2	Parametric Oscillations of a Pendulum	220
16.2.2.1	Pendulum Oscillations in the Conservative Case	220
16.2.2.2	Pendulum Oscillations with the Losses Taken into Account	223
16.3	Pendulum Dynamics with a Vibrating Suspension Point	228
16.4	Oscillations of a Linear Oscillator with Slowly Variable Frequency	230
17	Answers to Selected Exercises	233
	 Bibliography	 245
	 Index	 247

1

Introduction to the Theory of Oscillations

1.1

General Features of the Theory of Oscillations

Oscillatory processes and systems are so widely distributed in nature, technology, and society that we frequently encounter them in our everyday life and can, apparently, formulate their basic properties without difficulty. Indeed, when we hear about fluctuations in temperature, exchange rates, voltage, a pendulum, the water level, and so on, we understand that it is in relation to processes in time or space, which have varying degrees of repetition and return to their original or similar states. Moreover, these base properties of the processes do not depend on the nature of systems and can, therefore, be described and studied from just the point of view of a general interdisciplinary approach. This is exactly the approach that the theory of oscillations explores, the subject of which are the oscillatory phenomena and the processes in systems of different nature. The theory of oscillations gets its oscillatory properties from the analysis of the corresponding models. As a result of such an analysis, a connection between the parameters of the model and its oscillatory properties is established.

The theory of oscillations is both an applied and fundamental science. The applied character of the theory of oscillations is determined by its multiple applications in physics, mechanics, automated control, radio engineering and electronics, instrumentation, and so on. In these spheres of science, a large amount of research of different systems and phenomena was carried out, using the methods of the theory of oscillations. Furthermore, new technical directions have arisen on the basis of the theory of oscillations, namely, vibrational engineering and vibrational diagnostics, biomechanics, and so on. The fundamental characteristic of the theory of oscillations is based on the studied models themselves. They are the so-called dynamical systems, with the help of which one can describe any determinate evolution in time or in time and space. It is exactly the study of dynamical systems that allowed the theory of oscillations to introduce the concepts and conditions, develop the methods, and achieve the results that exert a large influence on other natural sciences. Here, we only mention the linearized stability theory, the concept of self-sustained oscillations and resonance, bifurcation theory, chaotic oscillations, and so on.

1.2

Dynamical Systems

Consider the system, the state of which is determined by the vector $\mathbf{x}(t) \in \mathbb{R}^n$. Assume that the evolution of the system is determined by a single parameter family of operators G^t , $t \in \mathbb{R}$ (or $t \in \mathbb{R}_+$) or $t \in \mathbb{Z}$ (or $t \in \mathbb{Z}_+$), such that the state of the system at the instant t

$$\mathbf{x}(t, \mathbf{x}_0) = G^t \mathbf{x}_0 \quad (1.1)$$

where $\mathbf{x}_0$ is its initial state (initial point). We also assume that the evolutionary operators satisfy the following two properties, which reflect the deterministic character of the described processes.

The first property: G^0 is the identity operator, that is,

$$\mathbf{x}(0, \mathbf{x}_0) = \mathbf{x}_0, \quad (1.2)$$

for any $\mathbf{x}_0$. This property means that the state of the system cannot change spontaneously.

The second property of the evolutionary operators is

$$G^{t_1+t_2} = G^{t_1} \cdot G^{t_2} = G^{t_2} \cdot G^{t_1}, \quad (1.3)$$

that is,

$$\mathbf{x}(t_1 + t_2, \mathbf{x}_0) = \mathbf{x}(t_1, \mathbf{x}(t_2, \mathbf{x}_0)) = \mathbf{x}(t_2, \mathbf{x}(t_1, \mathbf{x}_0)) \quad (1.4)$$

According to (1.3), the system reaches the same final state, regardless of whether it does so within one time interval $t_1 + t_2$ or over several successive intervals t_1 and t_2 , equal in sum to $t_1 + t_2$.

The combination of all initial points • or of all possible states of the system (in this case, $X = \mathbb{R}^n$) is called a *phase space*, and a pair $(X, \{G^t\})$, where a family of evolutionary operators satisfies the conditions (1.2) and (1.3), is a dynamical system.

Dynamical systems are divided into two important categories, one with continuous time if $t \in \mathbb{R}$ or $\mathbb{R}_+$ and another with discrete time if $t \in \mathbb{Z}$ or $\mathbb{Z}_+$.

The evolution of the system corresponds to the motion of the representation point in the phase space along the trajectory $\Gamma = \bigcup_t G^t \mathbf{x}_0$. The family

$\Gamma^+ = \bigcup_{t \geq 0} G^t \mathbf{x}_0$ $\left(\Gamma^- = \bigcup_{t < 0} G^t \mathbf{x}_0 \right)$ is called a positive semi-trajectory going through the initial point $\mathbf{x}_0$. If the family $\{G^t\}$ is continuous at t (for dynamical systems with continuous time), then the trajectories (semi-trajectory) represent continuous curves at X . For the dynamical systems with discrete time, the trajectories are discrete subsets in the phase space.

Let us introduce the idea of the invariance of a set, which will be necessary in what follows. The set $A \subset X$ is called positively (negatively) invariant if it consists of positive (negative) semi-trajectories, that is, A is positively (negatively) invariant if $G^t A \subset A$, $t > 0$ ($t < 0$). The set A is called invariant if it is invariant both when positive and when negative.

1.2.1

Types of Trajectories

Let us define the main types of the dynamical system trajectories.

- 1) The point $\mathbf{x}_0$ is called a fixed point of a dynamical system if $G^t \mathbf{x}_0 = \mathbf{x}_0$ for all t (for systems with continuous time, such points are more often called *equilibrium points*).
- 2) The point $\mathbf{x}_0$ is called periodic if there exists $T > 0$, such that $G^T \mathbf{x}_0 = \mathbf{x}_0$ and $G^t \mathbf{x}_0 \neq \mathbf{x}_0$ for $0 < t < T$, and its corresponding trajectory $\bigcup_{0 \leq t \leq T} G^t \mathbf{x}_0$ of the dynamical system passing through this point is periodic. A periodic trajectory is a closed curve in the phase space of a dynamical system with continuous time or a set of T -periodic points for the dynamical systems with discrete time.
- 3) The point $\mathbf{x}_0$ is called nonwandering if for any open set $U \ni \mathbf{x}_0$ of this point and any $t_0 > 0$ there exists $t > t_0$, such that $G^t U \cap U \neq \emptyset$. The trajectory going through a nonwandering point is called a nonwandering trajectory.

There is a correspondence between the trajectories of dynamical systems and the motions of real systems. Stationary states of real systems correspond to fixed points of dynamical systems, periodic motions correspond to periodic trajectories, and the motions with some degree of repetition of their states in time correspond to nonwandering trajectories.

Note that the aforementioned trajectories can also exist in the dynamical systems whose phase space is not necessarily $\mathbb{R}^n$. For example, the phase space of a dynamical system describing the oscillations of a mathematical pendulum is a cylinder, $X = S^1 \times \mathbb{R}$, as the state of the pendulum at any moment of time is uniquely described by its phase $\varphi(t)$ determined with accuracy up to 2π ($\varphi \in S^1$) and by the value of its velocity $\dot{\varphi} \in \mathbb{R}$.

1.2.2

Dynamical Systems with Continuous Time

For many dynamical systems with continuous time, the rule, which allows one to find the state at any point in time according to the initial state, is shown by the following system of ordinary differential equations:

$$\dot{x}_i = f_i(x_1, x_2, \dots, x_N), \quad i = 1, 2, \dots, N$$

or, in vector form,

$$\dot{\mathbf{x}} = \mathbf{F}(\mathbf{x}), \mathbf{x} \in \mathbb{R}^n, \mathbf{F} : \mathbb{R}^n \rightarrow \mathbb{R}^n, \quad (1.5)$$

for which the conditions of existence and uniqueness of the solutions are satisfied (hereafter we denote differentiation in time by an overdot). In this case, the family $G^t \mathbf{x}_0$ is simply given by the solution of system (1.5) with the initial condition $\mathbf{x}(0, \mathbf{x}_0) = \mathbf{x}_0$. For example, for the linear system

$$\dot{\mathbf{x}} = A\mathbf{x},$$

where A is an $n \times n$ matrix with constant elements, the solution has the form $\mathbf{x}(t, \mathbf{x}_0) = e^{At} \mathbf{x}_0$, where e^{At} is an $n \times n$ matrix. As the matrices e^{At_1} and e^{At_2} commute for any pair t_1, t_2 , the property (1.3)

$$e^{A(t_1+t_2)} = e^{At_1} \cdot e^{At_2} = e^{At_2} \cdot e^{At_1}$$

is fulfilled. Evidently, the property (1.2) is also fulfilled.

In another example, we consider the system given in polar coordinates

$$\dot{\rho} = \lambda \rho, \quad \dot{\varphi} = \omega,$$

where ρ and ω are the parameters. The solution of this system has the following form:

$$\rho = \rho_0 e^{\lambda t}, \quad \varphi = \omega t + \varphi_0$$

Hence, the evolution operators are specified as follows:

$$G^t : (\rho_0, \varphi_0) \rightarrow (\rho_0 e^{\lambda t}, \omega t + \varphi_0).$$

Evidently, the properties (1.2) and (1.3) are fulfilled.

Note that the right-hand side of system (1.5) does not depend on time explicitly. Such systems are called *autonomous*. There is also a large number of problems (e.g., systems subjected to an alternating external force), which are described by dynamical systems whose right-hand sides depend on time explicitly. They are called *nonautonomous*.

1.2.3

Dynamical Systems with Discrete Time

Dynamical systems with discrete time are usually defined as follows:

$$\mathbf{x}(n+1) = \mathbf{F}(\mathbf{x}(n)), \quad (1.6)$$

where $\mathbf{F} : \mathbb{R}^n \rightarrow \mathbb{R}^n$ is the map and $n \in \mathbb{Z}_+ = \{0, 1, 2, \dots\}$ is the discrete time.

For such systems, a trajectory is a finite or countable set of points in $\mathbb{R}^n$. Another equivalent notation is also used sometimes for a dynamical system with discrete time:

$$\bar{\mathbf{x}} = \mathbf{F}(\mathbf{x}),$$

where $\bar{\mathbf{x}}$ is the image of the point $\mathbf{x}$ under the action of the map $\mathbf{F}$. In this manual, we will use both forms of notation of maps.

Let us illustrate the concept of a dynamical system with discrete time by using the example of a one-dimensional map,

$$\bar{x} = 2x, \text{ mod } 1 \quad (1.7)$$

The phase space of this map is the interval $[0, 1]$. Let $x(0) = 1/5$. Directly from (1.7), we obtain

$$x(0) = \frac{1}{5} \rightarrow x(1) = \frac{2}{5} \rightarrow x(2) = \frac{4}{5} \rightarrow x(3) = \frac{3}{5} \rightarrow x(4) = \frac{1}{5}$$