

VOLUME 1



Edited by
Miguel Algueró
J. Marty Gregg
Liliana Mitoseriu

Nanoscale Ferroelectrics and Multiferroics

*Key Processing and Characterization Issues,
and Nanoscale Effects*

WILEY

Nanoscale Ferroelectrics and Multiferroics

**Key Processing and Characterization Issues,
and Nanoscale Effects**

VOLUME I

Edited by

**MIGUEL ALGUERÓ
J. MARTY GREGG
LILIANA MITOSERIU**

WILEY

This edition first published 2016
© 2016 John Wiley & Sons Ltd

Registered office

John Wiley & Sons Ltd, The Atrium, Southern Gate, Chichester, West Sussex, PO19 8SQ, United Kingdom

For details of our global editorial offices, for customer services and for information about how to apply for permission to reuse the copyright material in this book please see our website at www.wiley.com.

The right of the authors to be identified as the authors of this work has been asserted in accordance with the Copyright, Designs and Patents Act 1988.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, except as permitted by the UK Copyright, Designs and Patents Act 1988, without the prior permission of the publisher.

Wiley also publishes its books in a variety of electronic formats. Some content that appears in print may not be available in electronic books.

Designations used by companies to distinguish their products are often claimed as trademarks. All brand names and product names used in this book are trade names, service marks, trademarks or registered trademarks of their respective owners. The publisher is not associated with any product or vendor mentioned in this book.

Limit of Liability/Disclaimer of Warranty: While the publisher and authors have used their best efforts in preparing this book, they make no representations or warranties with respect to the accuracy or completeness of the contents of this book and specifically disclaim any implied warranties of merchantability or fitness for a particular purpose. It is sold on the understanding that the publisher is not engaged in rendering professional services and neither the publisher nor the authors shall be liable for damages arising herefrom. If professional advice or other expert assistance is required, the services of a competent professional should be sought.

The advice and strategies contained herein may not be suitable for every situation. In view of ongoing research, equipment modifications, changes in governmental regulations, and the constant flow of information relating to the use of experimental reagents, equipment, and devices, the reader is urged to review and evaluate the information provided in the package insert or instructions for each chemical, piece of equipment, reagent, or device for, among other things, any changes in the instructions or indication of usage and for added warnings and precautions. The fact that an organization or Website is referred to in this work as a citation and/or a potential source of further information does not mean that the author or the publisher endorses the information the organization or Website may provide or recommendations it may make. Further, readers should be aware that Internet Websites listed in this work may have changed or disappeared between when this work was written and when it is read. No warranty may be created or extended by any promotional statements for this work. Neither the publisher nor the authors shall be liable for any damages arising herefrom.

Library of Congress Cataloging-in-Publication Data

Names: Algueró, Miguel, 1969- editor. | Gregg, J. Marty (John Marty), 1969- editor. | Mitoseriu, Liliana, editor.

Title: Nanoscale ferroelectrics and multiferroics : key processing and characterization issues, and nanoscale effects / [compiled by] Miguel Algueró, J. Marty Gregg, Liliana Mitoseriu.

Description: Hoboken : John Wiley & Sons, Inc., 2016. | Includes bibliographical references and index.

Identifiers: LCCN 2015042479 (print) | LCCN 2015046191 (ebook) | ISBN 9781118935750 (cloth) | ISBN 9781118935675 (ePub) | ISBN 9781118935705 (Adobe PDF)

Subjects: LCSH: Ferroelectric devices. | Nanoelectromechanical systems.

Classification: LCC TK7872.F44 N36 2016 (print) | LCC TK7872.F44 (ebook) | DDC 621.381-dc23

LC record available at <http://lcn.loc.gov/2015042479>

A catalogue record for this book is available from the British Library.

ISBN: 9781118935750

Set in 10/12pt Times by Aptara Inc., New Delhi, India.

Printed and bound in Malaysia by Vivar Printing Sdn Bhd

Nanoscale Ferroelectrics and Multiferroics

List of Contributors

Andrew R. Akbashev Drexel University, USA

Miguel Alguero Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Andreas Amann Tyndall National Institute, University College Cork, Ireland; and School of Mathematical Sciences, University College Cork, Ireland

Harvey Amorin Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Nicoleta Apostol National Institute of Materials Physics, Romania

Juras Banys Faculty of Physics, Vilnius University, Lithuania

Laurent Bellaiche Physics Department, University of Arkansas, USA

Daniela C. Berger Departement of Inorganic Chemistry, Physical-Chemistry and Electrochemistry, "Politehnica" University of Bucharest, Romania

J.D. Bobic Institute for Multidisciplinary Research, University of Belgrade, Serbia

Alexei A. Bokov Department of Chemistry and 4D LABS, Simon Fraser University, Canada

Andra G. Boni National Institute of Materials Physics, Romania

Mihaela Botea National Institute of Materials Physics, Romania

Iñigo Bretos Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Maria Teresa Buscaglia Institute of Energetics and Interphases, National Research Council, Italy

Vincenzo Buscaglia Institute of Energetics and Interphases, National Research Council, Italy

Michael P.D. Campbell School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom

Arianna Casiraghi NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

Alichandra Castro CICECO – Aveiro Institute of Materials, Department of Materials and Ceramic Engineering, University of Aveiro, Portugal

Alicia Castro Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Madrid, Spain

Li-Wu Chang School of Maths and Physics, Queen’s University Belfast, Northern Ireland, United Kingdom

Cristina Chirila National Institute of Materials Physics, Romania

Frank Clemens Laboratory for High Performance Ceramics, Empa, Swiss Federal Laboratories for Materials Science and Technology, Switzerland

Covadonga Correias Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain; and College of Engineering, Swansea University, United Kingdom

Lavinia P. Curecheriu Department of Physics, “Alexandru Ioan Cuza” University, Romania

Nitin Deepak Tyndall National Institute, University College Cork, Ireland

Marco Deluca Materials Center Leoben Forschung GmbH, and Institut für Struktur- und Funktionskeramik, Montanuniversität Leoben, Austria

Xiangdong Ding State Key Laboratory for Mechanical Behavior of Materials, Xi’an Jiaotong University, China

Christopher De Dobbelaere Inorganic and Physical Chemistry Group, Institute for Materials Research, Universiteit Hasselt and imec vzw, Division imomec, Belgium

C. Doubrovsky Laboratoire de Physique des Solides, Université de Paris Sud, Campus d’Orsay, France

Ahmad Faraz Tyndall National Institute, University College Cork, Ireland

Liliana P. Ferreira Biosystems and Integrative Sciences Institute, Department of Physics, University of Coimbra, Portugal

Paula Ferreira CICECO – Aveiro Institute of Materials, Department of Materials and Ceramic Engineering, University of Aveiro, Portugal

Pascale Foury-Leylekian Laboratoire de Physique des Solides, Université de Paris Sud, Campus d’Orsay, France

Kévin J. A. Franke NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

Vladimir M. Fridkin Drexel University, USA; and Russian Academy of Sciences, Moscow, Russian Federation

Huaxiang Fu Physics Department, University of Arkansas, USA

Andreja Gajović Molecular Physics Laboratory, Institute Rudjer Boskovic, Croatia

Corneliu Ghica National Institute of Materials Physics, Romania

Margarida Godinho Biosystems and Integrative Sciences Institute, Department of Physics, Faculty of Sciences, University of Lisbon, Portugal

Martha Greenblatt Department of Chemistry and Chemical Biology, Rutgers, The State University of New Jersey, USA

J. Marty Gregg School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom

R. Grigalaitis Faculty of Physics, Vilnius University, Lithuania

Sampo J. Hämäläinen NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

An Hardy Inorganic and Physical Chemistry Group, Institute for Materials Research, Universiteit Hasselt and imec vzw, Division imomec, Belgium

Luminita M. Hrib National Institute of Materials Physics, Romania

Teresa Hungria Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain; and Centre de Microcaractérisation Raimond Castaing, UMS 3623, France

Alan J. Hurd Los Alamos National Laboratory, USA

Adelina-Carmen Ianculescu Department of Oxide Materials Science and Engineering, "Politehnica" University of Bucharest, Romania

Alin Iuga National Institute of Materials Physics, Romania

Maksim Ivanov Faculty of Physics, Vilnius University, Lithuania

Ricardo Jiménez Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Lynette Keeney Tyndall National Institute, University College Cork, Ireland

Michael R. Koblishka Institute of Experimental Physics, Saarland University, Germany

Anjela Koblishka-Veneva Institute of Experimental Physics, Saarland University, Germany

Amit Kumar School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom

Tuomas H.E. Lahtinen NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

Diego López González NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

M. Lourdes Calzada Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Axel Lubk Triebenberg Laboratory, Technische Universität Dresden, Germany

Tony Lusiola Laboratory for High Performance Ceramics, Empa, Swiss Federal Laboratories for Materials Science and Technology, Switzerland

Leo J. McGilly Ceramics Laboratory, École Polytechnique Fédérale de Lausanne (EPFL), Switzerland

Raymond G.P. McQuaid School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom

J. Macutkevicius Faculty of Physics, Vilnius University, Lithuania

César Magén Instituto de Nanociencia de Aragón-ARAIID, Universidad de Zaragoza, Spain

Tuhin Maity Tyndall National Institute, University College Cork, Ireland

Barbara Malič Electronic Ceramics Department, Jožef Stefan Institute, Slovenia

Liliana Mitoseriu Faculty of Physics, University "Alexandru Ioan Cuza", Romania

Evagelia G. Moshopoulou Institute of Nanoscience and Nanotechnology, National Center for Scientific Research "Demokritos", Greece; and Laboratoire de Physique des Solides, Université de Paris Sud, Campus d'Orsay, France

Ivan I. Naumov Carnegie Institution of Washington, USA

Raluca Negrea National Institute of Materials Physics, Romania

Marius Olariu Department of Electrical Measurements & Materials, Technical University Gh. Asachi Iasi, Romania

Leontin Padurariu University "Alexandru Ioan Cuza", Romania

Katharine Page Spallation Neutron Source, Oak Ridge National Laboratory, USA

Iuliana Pasuk National Institute of Materials Physics, Romania

Martyn E. Pemble Tyndall National Institute, University College Cork, Ireland; and Department of Chemistry, University College Cork, Ireland

Nikolay Petkov Tyndall National Institute, University College Cork, Ireland

M.M. Vijatovic Petrovic Institute for Multidisciplinary Research, University of Belgrade, Serbia

Ioana Pintilie National Institute of Materials Physics, Romania

Lucian Pintilie National Institute of Materials Physics, Romania

Sergei Prosandeev Physics Department, University of Arkansas, USA and Physics Department and Research Institute of Physics, Southern Federal University, Russia

Jesús Ricote Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain

Brian J. Rodriguez Conway Institute of Biomolecular and Biomedical Research, University College Dublin, Ireland

Saibal Roy Tyndall National Institute, University College Cork, Ireland

Ekhard. K.H. Salje Department of Earth Sciences, University of Cambridge, United Kingdom

Alina Schilling School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom

Michael Schmidt Tyndall National Institute, University College Cork, Ireland

Theodor Schneller Institut für Werkstoffe der Elektrotechnik II, RWTH Aachen University, Germany

Stella Skiadopoulou CICECO – Aveiro Institute of Materials, Department of Materials and Ceramic Engineering, University of Aveiro, Portugal

Etienne Snoeck Centre d'Elaboration de Matériaux et d'Etudes Structurales, CNRS, France

Jonathan E. Spanier Drexel University, USA

Biljana D. Stojanovic Institute for Multidisciplinary Research, University of Belgrade, Serbia

Bosiljka Tadić Department of Theoretical Physics, Jožef Stefan Institute, Slovenia

Cristian M. Teodorescu National Institute of Materials Physics, Romania

Gregor Trefalt Electronic Ceramics Department, Jožef Stefan Institute and Center of Excellence NAMASTE, Slovenia; and University of Geneva, Switzerland

Lucian Trupina National Institute of Materials Physics, Romania

Roxana Truşcă S.C. METAV – Research and Development, Romania

Marina Tyunina Microelectronics and Materials Physics Laboratories, University of Oulu, Finland

Marlies K. Van Bael Inorganic and Physical Chemistry Group, Institute for Materials Research, Universiteit Hasselt and imec vzw, Division imomec, Belgium

Sebastiaan van Dijken NanoSpin, Department of Applied Physics, Aalto University School of Science, Finland

Bogdan S. Vasile Department of Oxide Materials Science and Engineering, “Politehnica” University of Bucharest, Romania

Catalina A. Vasilescu Department of Oxide Materials Science and Engineering, “Politehnica” University of Bucharest, Romania

Paula M. Vilarinho CICECO – Aveiro Institute of Materials, Department of Materials and Ceramic Engineering, University of Aveiro, Portugal

Roger W. Whatmore Tyndall National Institute, University College Cork, Ireland; Department of Chemistry, University College Cork, Ireland and Department of Materials, Royal School of Mines, Imperial College London, United Kingdom

Zuo-Guang Ye Department of Chemistry and 4D LABS, Simon Fraser University, Canada

Preface

Multiferroics have been at the cutting edge of research and development in materials for ICTs for over a decade. During this period steady improvements in fundamental knowledge have been made. At the same time, nanoscale phenomena have assumed an increasing importance. Progress has benefited from the strong synergies with activities in nanoscale ferroelectrics, which are at a more mature stage. Multifunctionality and nanoscaling are widely acknowledged at present as the keys to the miniaturization of solid-state electronics, and specifically nanoferronics, which is emerging as a new area with large technological potential. The topic has now reached a maturity level that allows, and actually requires, books that provide a comprehensive revision of the topic, and an in-depth analysis of future trends. These are the objectives of *Nanoscale Ferroelectrics and Multiferroics: Key Processing and Characterization Issues*, and *Nanoscale Effects*.

It is intended to provide the increasing number of scientists and engineers, who are approaching the topic from a range of backgrounds, with a reference/guide text that should help them to roadmap their R&D activities. The volume reviews the key issues in processing and characterization of nanoscale ferroelectrics and multiferroics, and provides a comprehensive description of their properties. An emphasis is put on differentiating size effects of extrinsic ones like boundary or interface effects. Nanoscale novel, recently described, phenomena that are bound to be behind major advancement in the field during the coming years are also addressed.

The book is devised to stress, and take full advantage of, the synergies between nanoscale ferroelectrics and multiferroics. It covers materials nanostructured at all levels, from ceramic technologies like ferroelectric nanopowders, bulk nanostructured ceramics and thick films, and magnetoelectric nanocomposites, to thin films, either polycrystalline layer heterostructures or epitaxial systems, and to nanoscale free-standing objects with specific geometries, such as nanowires and tubes at different levels of development, but all technologically relevant. Nanostructuring is a requirement of the current tendency to miniaturization of ceramic technologies for microelectronics that imposes stringent conditions on processing, and has a deep impact on functional properties. Also, nanostructuring ultimately results in the ever-decreasing processing temperatures of thin films, a key issue to the integration of these multifunctional oxides with silicon devices and flexoelectronics. Last but not least, a range of novel physical phenomena has been described in nanoscale ferroelectrics and multiferroics that have the potential to enable a range of disruptive technologies, like magnetoelectric memory. Overall, the book reviews the current state of the art of these materials, stressing a range of specific topics at the cutting edge of research.

This project springs from the high-level European scientific knowledge platform built within the COST Action *Single and Multiphase Ferroics and Multiferroics with Restricted*

Geometries (SIMUFER, ref. MP0904), active between March 2010 and May 2014. COST (European Cooperation in Science and Technology) is a pan-European networking instrument that allows researchers from COST member countries and cooperating states to jointly develop their ideas and initiatives in a field or topic of common interest. SIMUFER established a multidisciplinary scientific network of groups from 24 European countries and 7 non-COST countries, experienced in synthesis, advanced characterization, and modeling of all nanoscale ferroics, single-phase multiferroics, and ferroic-based combinations of dissimilar materials. This book project arises primarily from their expertise, though it has been open to world renowned experts when necessary. Chapter contributors have been carefully selected and have all made major contributions to knowledge of the respective topics; overall, they are among the most respected scientists in the field.

Introduction

Why Nanoscale Ferroelectrics and Multiferroics?

Miguel Algueró¹, J. Marty Gregg², and Liliana Mitoseriu³

¹*Instituto de Ciencia de Materiales de Madrid (ICMM), Consejo Superior de Investigaciones Científicas (CSIC), Spain*

²*School of Maths and Physics, Queen's University Belfast, Northern Ireland, United Kingdom*

³*Faculty of Physics, University "Alexandru Ioan Cuza", Romania*

I.1 Ferroics and Multiferroics

Single-phase ferroics are compounds that present one of the three (currently expanded to four) ferroic properties: ferroelectricity, ferromagnetism, or ferroelasticity, to which ferrotoroidicity has recently been added. The common feature of the four types of ferroics is the appearance of the ferroic order; either it is a spontaneous electrical polarization, magnetization, strain, or toroidal moment, in a phase transition from a high-temperature prototype phase to the low-temperature ferroic phase, related by a group/subgroup relationship. This transition is always accompanied by a decrease in symmetry and the splitting of the ferroic phase into domains (regions with a different orientation of the order parameter). A second feature, the direct consequence of the switchable nature of the order parameter and of the domain dynamics, is the characteristic ferroic hysteresis loop; that is, a distinctive hysteretic dependence of the order parameter on its conjugated field (electric or magnetic field, mechanical stress or toroidal source vector, respectively), with two remnant states of opposite sign [1]. The four phenomena are schematically shown in Figure I.1. Ferroics are highly topical, advanced functional materials that have not only enabled a range of mature and ubiquitous related technologies (like magnetic

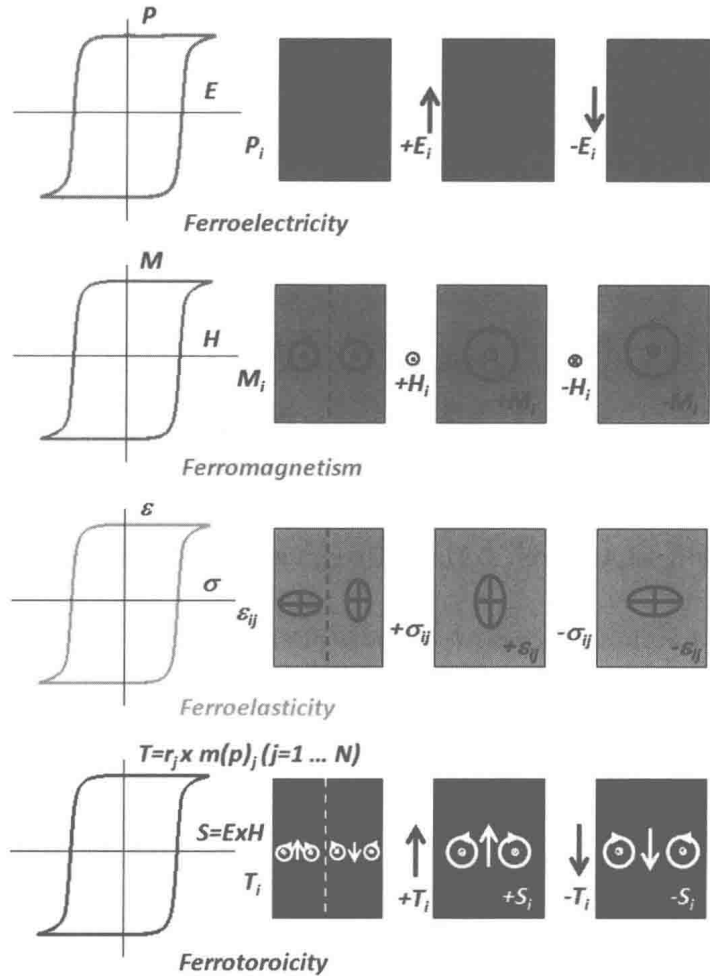


Figure 1.1 Schematics of domains and hysteretic switching for the four ferroic phenomena. Adapted by permission of IOP Publishing from [1]. © IOP Publishing. All rights reserved.

or ferroelectric information recording, ceramic ultrasound transducers, or shape memory alloys, to name only a few examples) but are also under extensive research for a number of novel, potentially disruptive, applications [2].

There are also compounds that simultaneously present two (or more) ferroic phenomena, known as multiferroics, among which those showing coexistence of ferroelectricity and ferromagnetism (initially termed ferroelectromagnets) are receiving increasing attention [3, 4]. This is not only because of their inherent multifunctionality but also for the fact that they are liable to show magnetoelectric coupling, and have thus the potential to enable the electrical control of magnetism (and the magnetic control of polarization) [5].

This book specifically deals with ferroelectrics and ferroelectromagnets (either robust ferromagnetic materials or canted antiferromagnets showing weak ferromagnetism), though the general term multiferroics will be used following the current tendency to name

ferroelectric–ferromagnetic materials, and in general any type of magnetic ordering compounds, in this way.

The choice of addressing them together only acknowledges the deep-rooted relationship between the two sets of materials; multiferroism requires ferroelectricity and thus multiferroics have to be electrically insulating to be functional (an issue not always acknowledged). This feature is not easily found in magnetic materials, most of them being metallic or narrow-band gap semiconductors. Indeed, chemical bonding requirements suggest the two ferroic phenomena to be incompatible [6]; transition metal or rare earth atomic species with partially filled outer *d* or *f* electronic shells (and unpaired electrons) are necessary for magnetism, while model ferroelectric perovskite oxides are characterized by covalently bonded transition metals (to oxygen) with empty *d* orbitals [7]. Nevertheless, an ever-increasing number of multiferroic single-phase materials have been reported over the last decade, exploring alternative mechanisms of ferroelectricity.

I.2 Ferroelectric Materials and Related Technologies

Ferroelectrics are thus materials that present a spontaneous electrical polarization, whose direction can be reversed with an electric field (by nucleation and growth of inversion domains, resulting in the distinctive ferroelectric hysteresis). The ferroic phase appears at a ferroelectric transition, driven by electrical polarization [8], which can be either of a displacive type, the most common one, associated with a crystal structure instability induced by condensation of a transverse optical phonon (the soft mode) [9], or of an order–disorder type. Its macroscopic phenomenological description according to Landau’s theory of phase transitions can be found in Chapter 19.

All ferroelectrics are also pyroelectric and piezoelectric, as well as electrooptic, which turns them into a prototype of multifunctionality (even before magnetic order is added). Moreover, they are the only materials that can present these properties, intrinsically linked to the crystal structure, in polycrystalline form (thanks to the ability to reorient the polarization under an electric field).

Though ferroelectricity was first described for hydrogen-bonded compounds (Rochelle salt being the first one in 1921), and there are also examples among tellurides, fluorides, and iodides [10], a number of electroactive polymers like poly(vinylidene fluoride) [11], and recent reports of ferroelectric metal organic frameworks [12], clearly oxides stand out as the ones that have enabled a range of successful ferroelectric technologies.

I.2.1 Ferroelectric Bulk Technologies

Perhaps the best-known ferroelectric, and also the first oxide shown to be so in 1944, is BaTiO_3 with a perovskite structure. This model compound presents the ferroelectric transition at ~ 393 K and a succession of low-temperature polymorphic phase transitions between ferroelectric phases with decreasing symmetry, from tetragonal to orthorhombic and to rhombohedral, for which the polar axis (and thus the direction of the spontaneous polarization defined by the displacement of the Ti^{4+} cation from the centre of the oxygen octahedra) changes. Polymorphism is a quite common phenomenon in ferroelectric perovskite oxides and plays a very important role in their functionality. BaTiO_3 is also the base composition

of multilayer ceramic capacitors (after the chemical tailoring of the ferroelectric transition down to room temperature), one of the two large-scale, mature bulk ceramic ferroelectric technologies. This material and its modifications are extensively addressed in this book (see Chapters 1, 11, 12, 15, and 18), for the miniaturization of these capacitors is a case study of the current trends in microelectronics that require the nanostructuring of the ceramic layers. In the last few years, nanostructured BaTiO_3 and its solid solutions have become the main candidates for active materials used in capacitive building blocks for energy storage applications.

The second successful technology is piezoelectric ceramics for electromechanical transduction. The state of the art material for these applications, which range from sensors and actuators (like accelerometers or positioning systems for scanning probe microscopy, respectively) and their combination in smart systems (to implement active vibration damping), to ultrasound generation and sensing (for medical imaging or non-destructive testing), and to submarine acoustics, is $\text{Pb}(\text{Zr,Ti})\text{O}_3$, which also has a perovskite structure. This is an oxide solid solution, for which the best properties are found at a morphotropic phase boundary (MPB) between rhombohedral and tetragonal ferroelectric polymorphs, for which a monoclinic phase has been recently described [13]. This material can be regarded as a modification of PbTiO_3 , a second model ferroelectric oxide that also shows a succession of polymorphic phase transitions, yet induced by hydrostatic pressure instead of temperature [14], which has been placed at one of these ferroelectric instabilities (the MPB) by building up chemical pressure (achieved by substitution of Zr^{4+} for Ti^{4+}). As a matter of fact, the very good electromechanical response of this material is a combination of two effects, a crystal contribution, associated with the existence of a transverse lattice instability at the monoclinic tetragonal boundary [15], and an extrinsic contribution, associated with the fact that ferroelectric perovskite oxides are also ferroelastic (and therefore multiferroic, but not ferroelectromagnets). The spontaneous strain develops at the ferroelectric transition along with the polarization (the two parameters are intrinsically coupled), and as a consequence ferroelectric–ferroelastic domains appear (in addition to polarization inversion domains). The non- 180° (90° in the tetragonal case) domain walls are mobile under stress and electric field (unlike 180° walls that only move under an electric field), giving way to a wall contribution to the piezoelectric effect [16]. Moreover, the domain dynamics is enhanced at the morphotropic phase boundary. In addition, chemical (or doping) engineering of $\text{Pb}(\text{Zr,Ti})\text{O}_3$ has been developed that enables a range of soft and hard piezoelectric ceramics with tailored properties for specific applications. Piezoelectric ceramics are also being considered for novel applications, such as energy harvesting [17] and magnetoelectric composites (see later). Further explanations of the mechanisms, along with a review of alternative materials, can be found in Chapter 16. This technology is not oblivious to the general miniaturization trend and nanostructuring can also be anticipated.

Other examples of ferroelectric ceramic bulk technologies are infrared (IR) cameras for night vision (and, in general, IR detectors for a range of applications exploiting the pyroelectric effect) and electrooptic devices. Modifications of PbTiO_3 like $(\text{Pb,Lu})\text{TiO}_3$ and transparent $(\text{Pb,Lu})(\text{Zr,Ti})\text{O}_3$ are usually the material choices, respectively. An excellent review of ferroelectric ceramics and related technologies can be found in [18].

Also successful ferroelectric single-crystal technologies are presently available. The best examples are surface acoustic wave (SAW) devices for radio frequency and microwave signal conditioning, based on ferroelectric LiNbO_3 substrates. At the very end of the