



Polymer Surface Modification and Micropatterning for Biomedical Applications

Hui Sun, Yingkai Xu, Guozhi Xu



Chemical Industry Press

Polymer Surface Modification and Micropatterning for Biomedical Applications

Hui Sun, Yingkai Xu, Guozhi Xu



Chemical Industry Press

· Beijing ·

精确控制细胞行为是细胞和组织工程学研究的目标,材料表面形貌特别是微/纳米图案化形貌对细胞行为产生重要影响。本书基于著者近年来在高分子生物材料领域的科研成果撰写而成,系统地介绍了温和的无溶剂气相光接枝用于高分子材料的新方法和该法与微流体孔道技术相结合提出的掩模光接枝的高分子表面微/纳米图案化新技术,适合化学、化工、材料、生物工程等领域科研工作者阅读使用。

图书在版编目 (CIP) 数据

面向生物医用的高分子表面修饰和微/纳米图案化=
Polymer Surface Modification and Micropatterning for
Biomedical Applications/ 孙辉, 徐英凯, 许国志著.
北京: 化学工业出版社, 2010.5
ISBN 978-7-122-07908-4

I. 面… II. ①孙… ②徐… ③许… III. ①医用
高分子材料-英文②生物医学工程-纳米材料-英文
IV.R318.08

中国版本图书馆 CIP 数据核字 (2010) 第 038486 号

责任编辑: 陈 丽 刘砚哲
责任校对: 边 涛

装帧设计: 王晓宇

出版发行: 化学工业出版社

(北京市东城区青年湖南街 13 号 邮政编码 100011)

印 装: 北京云浩印刷有限责任公司

850mm×1168mm 1/32 印张 6 字数 160 千字

2010 年 5 月北京第 1 版第 1 次印刷

购书咨询: 010-64518888 (传真: 010-64519686)

售后服务: 010-64518899

网 址: <http://www.cip.com.cn>

凡购买本书, 如有缺损质量问题, 本社销售中心负责调换。

定 价: 80.00 元

版权所有 违者必究

Preface

Nowadays, polymers have been increasingly used as cell-culture substrates. Studies show that both polymer surface chemistry and surface topography play important roles in cell-surface interactions. Polymer surface modification and patterning have enabled the fabrication of model surface for cell-surface interaction studies.

In this book, we describe surface modification of polymers via solvent-free vapour-phase photografting and electron-beam induced grafting polymerization as well as hydrolysis approaches. Grafted molecules of interests are acrylamide, maleic anhydride and acrylic acid. Polymer substrates chosen are both conventional and biodegradable, such as poly(ethylene terephthalate), poly(methyl methacrylate) and polycaprolactone. A variety of surface functionalities including XPS probe molecules are incorporated into modified polymer surfaces. Cell-recognizing RGD peptides were immobilized onto polymer surface for cell-surface interaction studies. Contact angle measurements, X-ray photo-

electron spectroscopy, ultraviolet-vis spectroscopy are employed to precisely characterize surface properties.

We also describe masked vapour phase photo-grafting as a novel approach to micropatterning polymer surfaces. The development of this method is based on the combination of vapour phase photo-grafting and microfluidic channel technique. It provides a new means of modifying and patterning polymer surface at the same time.

I am indebted to many persons who have in one way or another helped make this book possible. I would like to thank my co-authors Dr. Yingkai Xu and Prof. Guozhi Xu for their time spent. I am particularly grateful to Beijing Technology and Business University for financial support. I would like to express my gratefulness to prof. Zhonglong Wei and colleagues for their encouragement.

Last but not the least, my sincere thanks go to my family and relatives, Sihong Ma, Jinglu Sun, Zhiyun Liu, Rongjiu Ma, Chengye Sun, Yuzhen Wang, Sijie Ma, Jie Sun, Ying Sun, Yan Sun, Runpeng Dong for their love, support and patience.

Contents

1 Photografting of Acrylamide onto Poly (ethylene terephthalate)	1
1.1 Summary	3
1.2 Introduction	4
1.3 Materials, reagents and characterization	9
1.4 Grafting reactor	10
1.5 Grafting with acrylamide	12
1.6 Hofmann rearrangement and coupling with fluoro compound	14
1.7 Characterization of modified surface	15
1.7.1 Monomer vapour concentration	15
1.7.2 XPS and contact angle	18
1.7.3 Coupling reactions	23
1.8 Conclusions	27
References	28
 2 Photografting of Maleic Anhydride onto Poly (ethylene terephthalate)	 33
2.1 Summary	35
2.2 Introduction	35
2.3 Materials and reagents	39

2.4	Grafting reactor	40
2.5	Characterization	41
2.6	Grafting with maleic anhydride (MAH)	42
2.7	Conversion of surface functional groups	43
2.7.1	Hydrolysis of PET-anhydride to PET-COOH	43
2.7.2	Conversion of carboxylic PET-COOH to acid chloride PET-COCl	44
2.7.3	Coupling of amino compounds to PET-COC	44
2.7.4	Coupling of amino compound to PET- anhydride	45
2.7.5	Coupling of thiol compounds to PET-COOH	45
2.8	Cell cultivation on PET-RGD surface	47
2.9	Grafting and characterization	48
2.10	Coupling reactions	54
2.11	Surface concentrations of ligands	66
2.12	Surface grafting effect on cell behaviour	72
2.13	Conclusion	75
	References	75

3	Photografting of Acrylamide onto Poly (methyl methacrylate)	79
3.1	Summary	81

3.2	Introduction	81
3.3	Grafting and coupling	83
3.3.1	Materials and reagents	83
3.3.2	Grafting reactor	84
3.3.3	Characterization	85
3.3.4	Grafting with acrylamide	86
3.3.5	Hofmann rearrangement	87
3.3.6	Analysis of amino groups	88
3.3.7	Coupling with (polyethylene glycol)	89
3.3.8	Coupling with fluorosubstituted aldehyde	90
3.4	Characterization of grafted surface	91
3.4.1	On vapour phase grafting	91
3.4.2	Characterization using ESCA and contact angle	92
3.4.3	Functionalization	99
3.4.4	Coupling reactions	101
3.5	Conclusions	111
	References	111

4 Micropatterning Functional Groups on Polymer

	Surfaces via Masked Vapor-phase Photografting	115
4.1	Summary	117
4.2	Introduction	117

4.3	Preparation of mask and masked grafting	121
4.3.1	Materials and reagents	121
4.3.2	Mask preparation and patterned grafting	121
4.4	On solvent-free vapour-phase photografting	123
4.5	Micropatterning polymer surface via masked photografting	124
4.6	Conclusion	130
	References	131


5	Electron Beam-induced Graft Polymerization of Acrylic Acid and Immobilization of Arginine- glycine-aspartic Acid-containing Peptide onto Nanopatterned Polycaprolactone	133
5.1	Summary	135
5.2	Introduction	136
5.3	Experimental	138
5.3.1	Material and reagents	138
5.3.2	Electron beam preirradiation	140
5.3.3	Graft polymerization	140
5.3.4	Determination of surface carboxylic groups	141
5.3.5	Immobilization of RGD peptide	142
5.3.6	Deactivation of excess disulfide groups	143

5.3.7	Determination of peptide concentration	144
5.3.8	Observation of surface topography	144
5.3.9	Cell cultivation	145
5.4	Results and discussion	146
5.4.1	Graft polymerization	146
5.4.2	Peptide immobilization	149
5.4.3	Cell behavior	154
5.5	Conclusions	157
	References	158

6 Facile Polyester Surface Functionalization via Hydrolysis and Cell-recognizing Peptide

	Attachment	161
6.1	Summary	163
6.2	Introduction	163
6.3	Experimental	165
6.3.1	Materials and reagents	165
6.3.2	Preparation of PCL membrane	166
6.3.3	Hydrolysis of PCL films	167
6.3.4	Attachment of peptide	167
6.3.5	Characterization of modified surfaces	168
6.4	Results and discussion	169
6.4.1	Preparation of thin films with dip-coating method	169

6.4.2	Base-catalysed surface hydrolysis	170
6.4.3	Peptide coupling onto carboxylated surface	174
6.5	Conclusion	180
	References	180

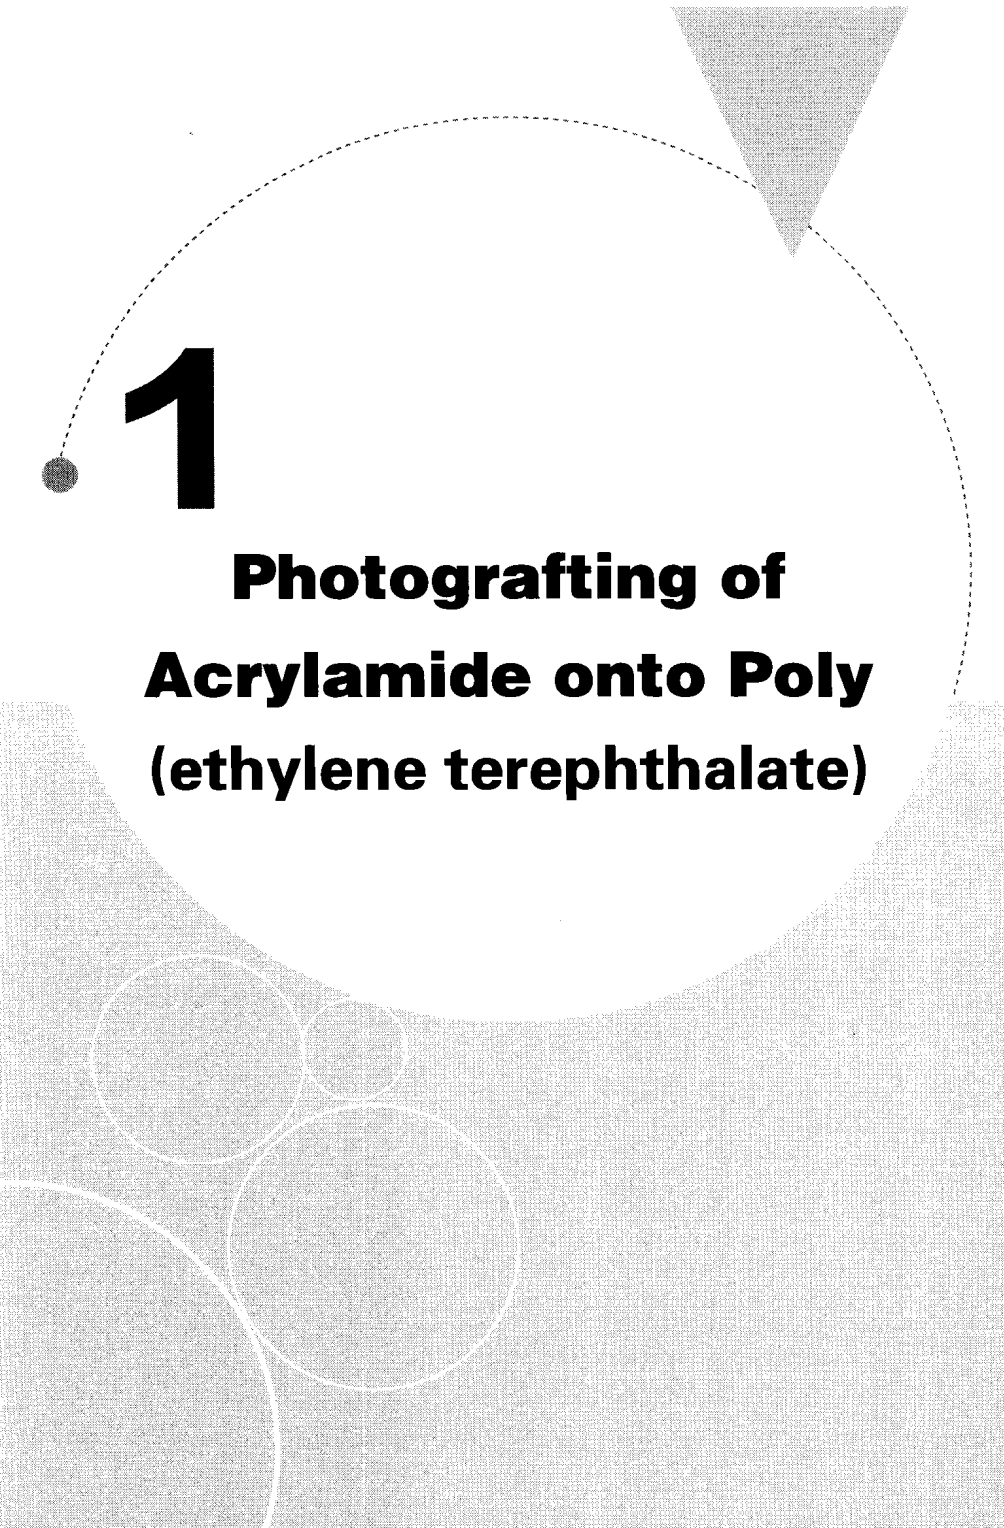

1

**Photografting of
Acrylamide onto Poly
(ethylene terephthalate)**

1.1 Summary

Poly (ethylene terephthalate) (PET) films were photografted under reduced pressure in a solvent free vapour of acrylamide and benzophenone without pre-treatment of PET by impregnation or sorption of reactants. Characterization of grafted samples by ESCA and contact angles showed that the grafting increased with grafting time and temperature. The amide groups obtained by the acrylamide grafting were converted into amine groups by the Hofmann rearrangement to be used in coupling reactions. These were confirmed with an acid chloride compound containing fluorine as label for ESCA. Surface grafting of polymeric substrates in the vapour phase induced by plasma or high energy and UV irradiation is reviewed.

The surface modification of PET for biomedical applications is of major interest since this polymer is a structural component in artificial vascular grafts and heart valves.

In this investigation we have studied the photo-

grafting of PET in a solvent free vapour phase of AAm and BPO at reduced pressure. The resulting acrylamide grafted surfaces were converted to contain amino groups by the Hofmann reaction for additional modification by coupling reactions with model compounds suitable for ESCA evaluation of the coupling efficiency.

1.2 Introduction

The chemical or physical functionalization of polymeric surfaces with amino, carboxylic or other reactive groups is a primary step for attaching additional reagents to the surface directly or via spacer molecules. For these secondary steps a range of high yield coupling reactions are available based on well established organic chemical reactions^[1-5]. Common applications are attachment of enzymes and antibodies in bioassays^[6], heparin in non-thrombogenic devices^[7] and cell binding peptides in cell and tissue engineering^[8,9].

Although the initial functionalization often uses adsorption methods covalent linking of the chemical groups to the substrate is desirable to increase environ-

mental stability. This regards pH, ionic strength, temperature and solvents in the subsequent coupling and purification steps as well as in the final applications.

In the selection of methods for the covalent binding of chemical groups to a solid polymeric substrate also the substrate material as such has to be concerned. This is not only with regard to its response to a certain graft initiating reaction and inertness towards processing conditions. Also in the chemical modification of a surface provided with submicro- or nanodimensional patterns such topographies should remain after the grafting operation. For these reasons we started to search for a mild but yet efficient surface grafting process with the ambition to confine the grafting to a thin surface layer.

The advantages of supplying the monomer in a vapour phase in comparison to liquid phase have long been recognized comprising more efficient use of monomer, less homopolymerization and easy separation of the grafted substrate.

Plasma techniques operate in a heterogeneous phase system where a solid substrate is reacted with a

vapour phase plasma at low pressures. Surface grafting may be achieved by activating the solid substrate with an inert gas plasma to generate radicals or peroxides prior to grafting^[10~13] or exposing it directly to monomeric or other functional plasmas^[13~16]. The main difficulty is to create a uniform plasma in small hollow spaces as would be encountered in small diameter pits and between substrate and mask^[17] when grafting topographies or patterns of submicron dimensions. Also when using inert plasma for activation, surface etching of the substrate may occur.

Other alternatives are surface grafting initiated by UV-, γ - or electron beam (EB) irradiation which are also carried out in heterogeneous systems where the substrate could be exposed to monomer in a surrounding liquid^[18~21] or vapour phase^[22, 23]. In comparison to γ - and EB- irradiation UV has a much lower energy and thus in general the lowest damage potential to the substrate. For materials which are transparent to the UV irradiation inner as well as outer surfaces could be treated also when grafting surfaces within very small cavities.